

# DETAILED DATA SHEET

## XTM LED Module

with Corrected Cold Phosphor Technology®

Designer Series



### About Xicato

Xicato designs and develops light sources and electronics that enable architects, designers and building managers to create beautiful, smart spaces in which people love to live and work. With thousands of installations around the globe, Xicato continues to be a leading supplier of high quality lighting solutions. Xicato is defining the future of intelligent light sources by integrating electronics, software and connectivity. Founded in 2007, Xicato's headquarters is based in Silicon Valley and the company has offices in China, Europe and the US.

For further information, visit [www.xicato.com](http://www.xicato.com).

## ABOUT THIS DOCUMENT

This is just one of many documents and tools available from Xicato to assist lighting designers, specifiers, and luminaire manufacturers in understanding and using Xicato products. These include:

- Product detailed data sheets (DDS)
- Accessory selection tools for heatsinks, optics, drivers and power supplies
- CAD files and drawings in 2D and 3D, and in multiple formats
- Application and technical notes for proper handling, design-in, and usage of the products
- Brochures to assist our distributors, OEM and lighting designer customers in promoting our products
- XCA-XTM-XIM Performance Curves, which provides graphs of flux, CCT and efficacy performance vs. intensity and temperature

See the Xicato website for these tools and more.

## TABLE OF CONTENTS

XTM LED Module with Corrected Cold Phosphor Technology® .....	1
Designer Series .....	1
About This Document .....	2
Table of Contents .....	2
General Description .....	3
Xicato Corrected Cold Phosphor Portfolio (See also XLT) .....	3
Ordering Guide .....	4
Mechanical Characteristics .....	6
Color Metrics: Designer Series .....	9
Performance Characteristics .....	11
Basic Handling and Assembly .....	13
Regulatory Information .....	14
Luminaire Specification: Recommended LED Module .....	15

## GENERAL DESCRIPTION

### XTM

The Xicato Thin Module (XTM) consists of a Xicato Core Array (XCA), pressure fit into a compact yet robust holder designed to allow attachment of a large ecosystem of lenses and heatsinks to facilitate design and construction of a wide variety of downlight and spot fixtures. The XTM includes:

- LED emitting core
- Zhaga-compatible holder
- Fixed wires

The integration of core and holder, with full UL and CE approval, provides the assurance of quality, and simplifies the certification of customer luminaires. XTM can accommodate Xicato's entire portfolio of color, CCT, and output options.

Xicato is the only light source provider to give long term warranty on both lumen maintenance and color consistency, for lowest total cost of ownership and smallest ecological footprint. With Xicato's industry leading color quality, consistency and application-optimized light spectra, XTM provides simply the most beautiful lit effect, and our warranty insures that consistent lighting design quality is maintained from build to refurbish.

### DESIGNER SERIES

Xicato Designer Series products provide an optimal balance between accurate, natural color rendition, lumen output and efficacy. Designer Series comes in various combinations of 9mm and 19mm LES, 2700K, 3000K, 3500K and 4000K CCT, and lumen packages from 700LM to 4500LM. All deliver minimum CRI  $R_a$  of 90 and  $R_9$  of 50, TM-30  $R_f$  of 89 and  $R_g$  of 101, and a consistent white point.

## XICATO CORRECTED COLD PHOSPHOR PORTFOLIO (SEE ALSO XLT)

Xicato Portfolio	Lumen Output	Correlated Color Temperature			
		2700K	3000K	3500K	4000K
<b>Artist Series®</b> CIE CRI: $R_a$ 95+, $R_9$ 90+ IES TM-30: $R_f$ 96, $R_g$ 103	700	⊙	⊙	⊙	⊙
	1300	⊙	⊙	⊙	⊙
	2000	•	•	•	•
	3000	•	•	•	•
	4000	•	•	•	•
<b>Beauty Series™</b> CIE CRI: $R_a$ 95 IES TM-30: $R_f$ 91, $R_g$ 107	1300	⊙	⊙	⊙	⊙
	2000	•	•	•	•
<b>Designer Series™</b> CIE CRI: $R_a$ 90+, $R_9$ 50+ IES TM-30: $R_f$ 88, $R_g$ 101	700	⊙	⊙	⊙	⊙
	1300	⊙	⊙	⊙	⊙
	2000	⊙	⊙	⊙	⊙
	3000	•	•	•	•
	4500	•	•	•	•
<b>Standard Series</b> CIE CRI: $R_a$ 80+ IES TM-30: $R_f$ 78, $R_g$ 101	700	⊙	⊙	⊙	⊙
	1300	⊙	⊙	⊙	⊙
	2000	⊙	⊙	⊙	⊙
	3000	•	•	•	•
	4000	•	•	•	•
	5000	•	•	•	•
<b>Vibrant Series® V80</b> CIE CRI: $R_a$ 80+ IES TM-30: $R_f$ 73, $R_g$ 105	700	⊙	⊙	⊙	⊙
	1300	⊙	⊙	⊙	⊙
	2000	⊙	⊙	⊙	⊙
	3000	•	•	•	•
	4000	•	•	•	•
<b>Vibrant Series® V95</b> CIE CRI: $R_a$ 95+ IES TM-30: $R_f$ 93, $R_g$ 106	700	⊙	⊙	⊙	⊙
	1300	⊙	⊙	⊙	⊙
	2000	•	•	•	•
	3000	•	•	•	•
	4000	•	•	•	•

LEGEND	XCA+XTM	+XIM
9mm LES	•	⊙
19mm LES	•	⊙

Note:  
CRI listed as XX+ are guaranteed minimum values. Typical values are min+3.

## ORDERING GUIDE

### PART NUMBERING SYSTEM: XICATO LIGHT SOURCES

NOTE that all combinations are not available. Please see listing, below.

X	IM	19	95	30	13	A2	A
Xicato	CA: Core Array IM: Intelligent Module TM: Thin Module	Light Emitting Surface (LES mm)  09: 9 19: 19	Series  80: Standard 90: Designer 95: Artist BT: Beauty V8: Vibrant 80 V9: Vibrant 95	CCT (K)  27: 2700 30: 3000 35: 3500 40: 4000 01: NA	Flux (nominal)  07: 700 13: 1300 20: 2000 30: 3000 40: 4000 45: 4500 50: 5000	Feature Group  A2: DALI A3: 1-10V A5: DALI+BLE A6: 1-10V+BLE CC: constant current	Revision

### PART CODES AND DESCRIPTIONS

Note: products in gray are planned for future release. Not currently orderable. Please contact your Xicato sales representative or distributor for more information on availability.

### XTM DESIGNER SERIES WITH 9MM LIGHT EMITTING SURFACE (LES)

Part Number	Description
<b>XTM09902707CCA</b>	LED Module, XTM, LES09, Designer, 2700K, 700LM
<b>XTM09902713CCA</b>	LED Module, XTM, LES09, Designer, 2700K, 1300LM
<b>XTM09902720CCA</b>	LED Module, XTM, LES09, Designer, 2700K, 2000LM
<b>XTM09903007CCA</b>	LED Module, XTM, LES09, Designer, 3000K, 700LM
<b>XTM09903013CCA</b>	LED Module, XTM, LES09, Designer, 3000K, 1300LM
<b>XTM09903020CCA</b>	LED Module, XTM, LES09, Designer, 3000K, 2000LM
<b>XTM09903507CCA</b>	LED Module, XTM, LES09, Designer, 3500K, 700LM
<b>XTM09903513CCA</b>	LED Module, XTM, LES09, Designer, 3500K, 1300LM
<b>XTM09903520CCA</b>	LED Module, XTM, LES09, Designer, 3500K, 2000LM
<b>XTM09904007CCA</b>	LED Module, XTM, LES09, Designer, 4000K, 700LM
<b>XTM09904013CCA</b>	LED Module, XTM, LES09, Designer, 4000K, 1300LM
<b>XTM09904020CCA</b>	LED Module, XTM, LES09, Designer, 4000K, 2000LM

## XTM DESIGNER SERIES WITH 19MM LIGHT EMITTING SURFACE (LES)

Part Number	Description
<b>XTM19902713CCA</b>	LED Module, XTM, LES19, Designer, 2700K, 1300LM
<b>XTM19902720CCA</b>	LED Module, XTM, LES19, Designer, 2700K, 2000LM
<b>XTM19902730CCA</b>	LED Module, XTM, LES19, Designer, 2700K, 3000LM
<b>XTM19903013CCA</b>	LED Module, XTM, LES19, Designer, 3000K, 1300LM
<b>XTM19903020CCA</b>	LED Module, XTM, LES19, Designer, 3000K, 2000LM
<b>XTM19903030CCA</b>	LED Module, XTM, LES19, Designer, 3000K, 3000LM
<b>XTM19903045CCA</b>	LED Module, XTM, LES19, Designer, 3000K, 4500LM
<b>XTM19903513CCA</b>	LED Module, XTM, LES19, Designer, 3500K, 1300LM
<b>XTM19903520CCA</b>	LED Module, XTM, LES19, Designer, 3500K, 2000LM
<b>XTM19903530CCA</b>	LED Module, XTM, LES19, Designer, 3500K, 3000LM
<b>XTM19903545CCA</b>	LED Module, XTM, LES19, Designer, 3500K, 4500LM
<b>XTM19904013CCA</b>	LED Module, XTM, LES19, Designer, 4000K, 1300LM
<b>XTM19904020CCA</b>	LED Module, XTM, LES19, Designer, 4000K, 2000LM
<b>XTM19904030CCA</b>	LED Module, XTM, LES19, Designer, 4000K, 3000LM
<b>XTM19904045CCA</b>	LED Module, XTM, LES19, Designer, 4000K, 4500LM

## MECHANICAL CHARACTERISTICS

### MECHANICAL SPECIFICATIONS


Module Housing Material:	Injection molded glass filled PBT
Dimensions:	50mm x 5.7mm (1.97" x 0.78")
Weight:	48 grams (1.69 oz.)
Light Emitting Surface options:	Ø 19mm (0.75")
Module Source Type:	Corrected Cold Phosphor Technology®
Interfaces – Electrical:	Fixed 20 gauge wires 400mm
Interfaces – Mechanical:	Recommended mounting screws: M3 x 0.5mm x 8mm with split lock washer.
Mounting Torque:	Three-hole pattern: min 0.36 Nm (3.2 in-lbs); max 0.43 Nm (3.8 in-lbs) Two-hole pattern: min 0.54 Nm (4.8 in-lbs); max 0.65 Nm (5.8 in-lbs)
Interface – Thermal:	Integrated thermal pad. Recommend a mating thermal interface (i.e. heatsink) surface flatness of $\leq 0.1\text{mm}$ in order to maintain thermal performance. Center hole diameter affects thermal performance and max power – see Application Note on Xicato website.
Maximum Case Temperature:	90°C
Shipping (100 count box):	533mm x 254mm x 153mm (21" x 10" x 6") 3 kg (7 lbs.)
Storage Temperature:	-40°C to +85°C



XTM with 19mm LES


## MECHANICAL DRAWINGS

Note: XTM with 9mm LES is identical except for the diameter of the light emitting surface.

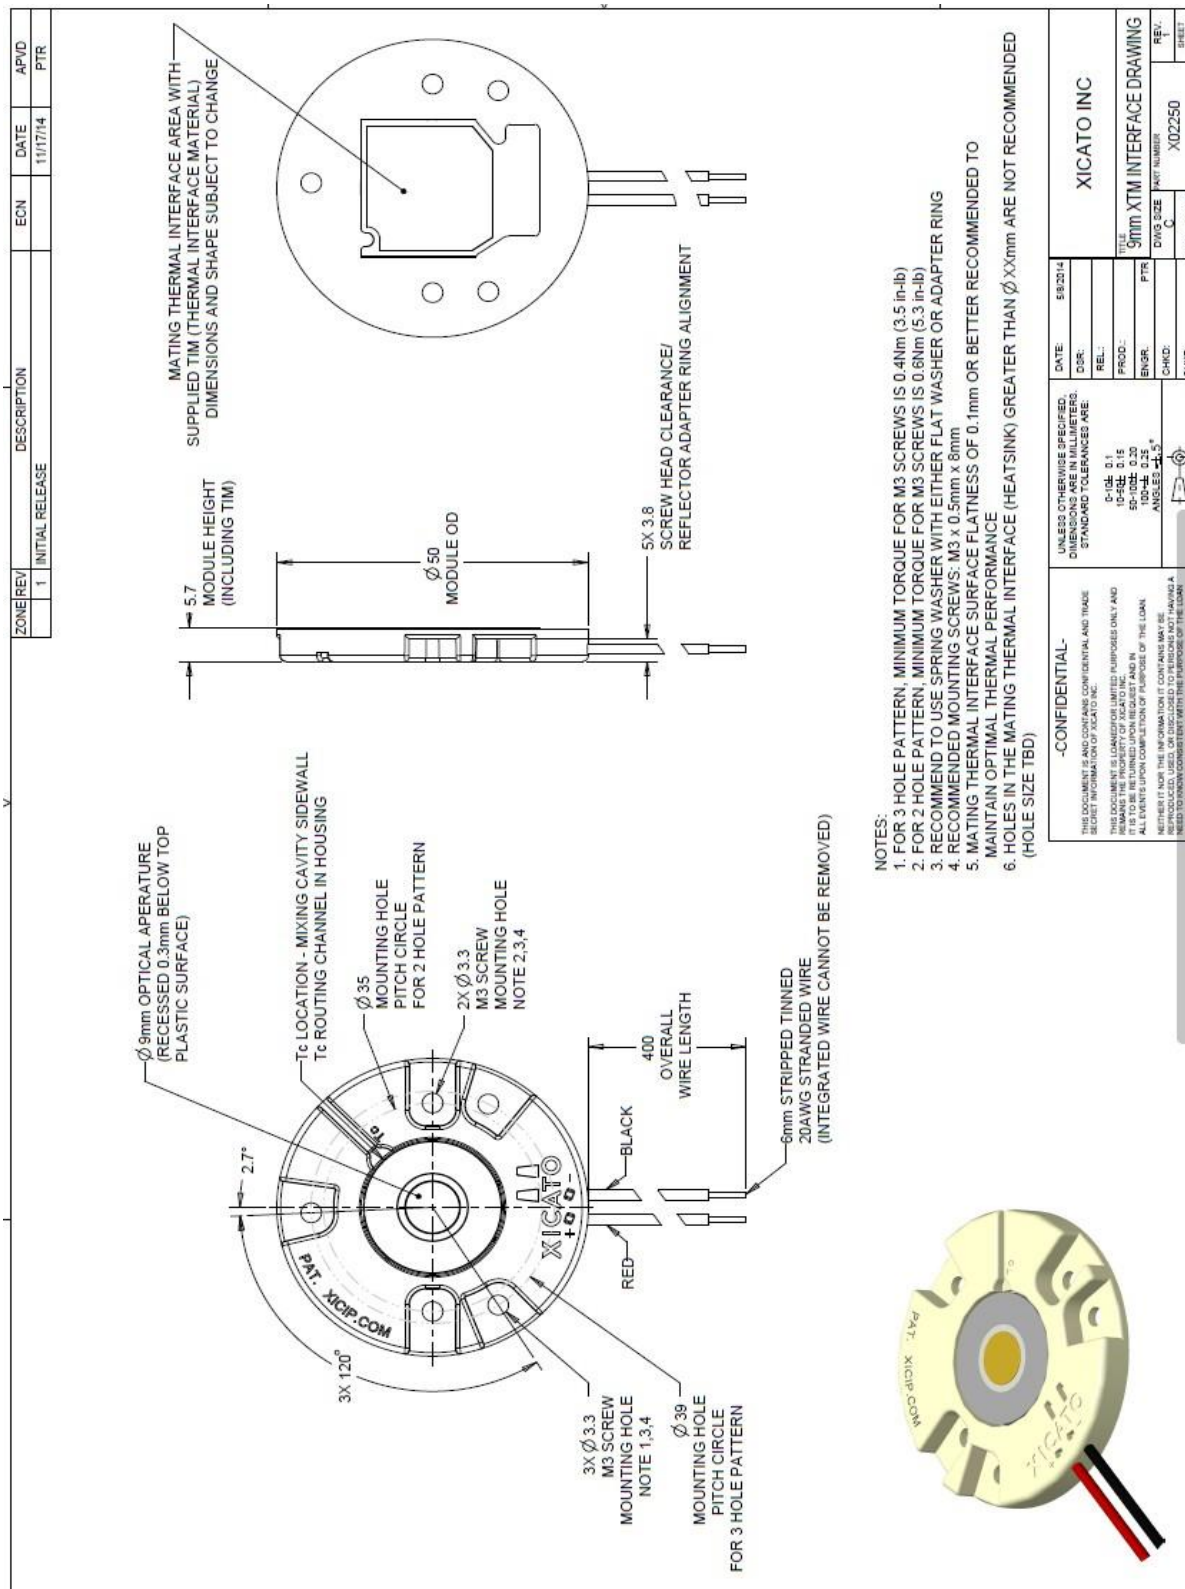



Note: XTM with 9mm LES is identical except for the diameter of the light emitting surface.

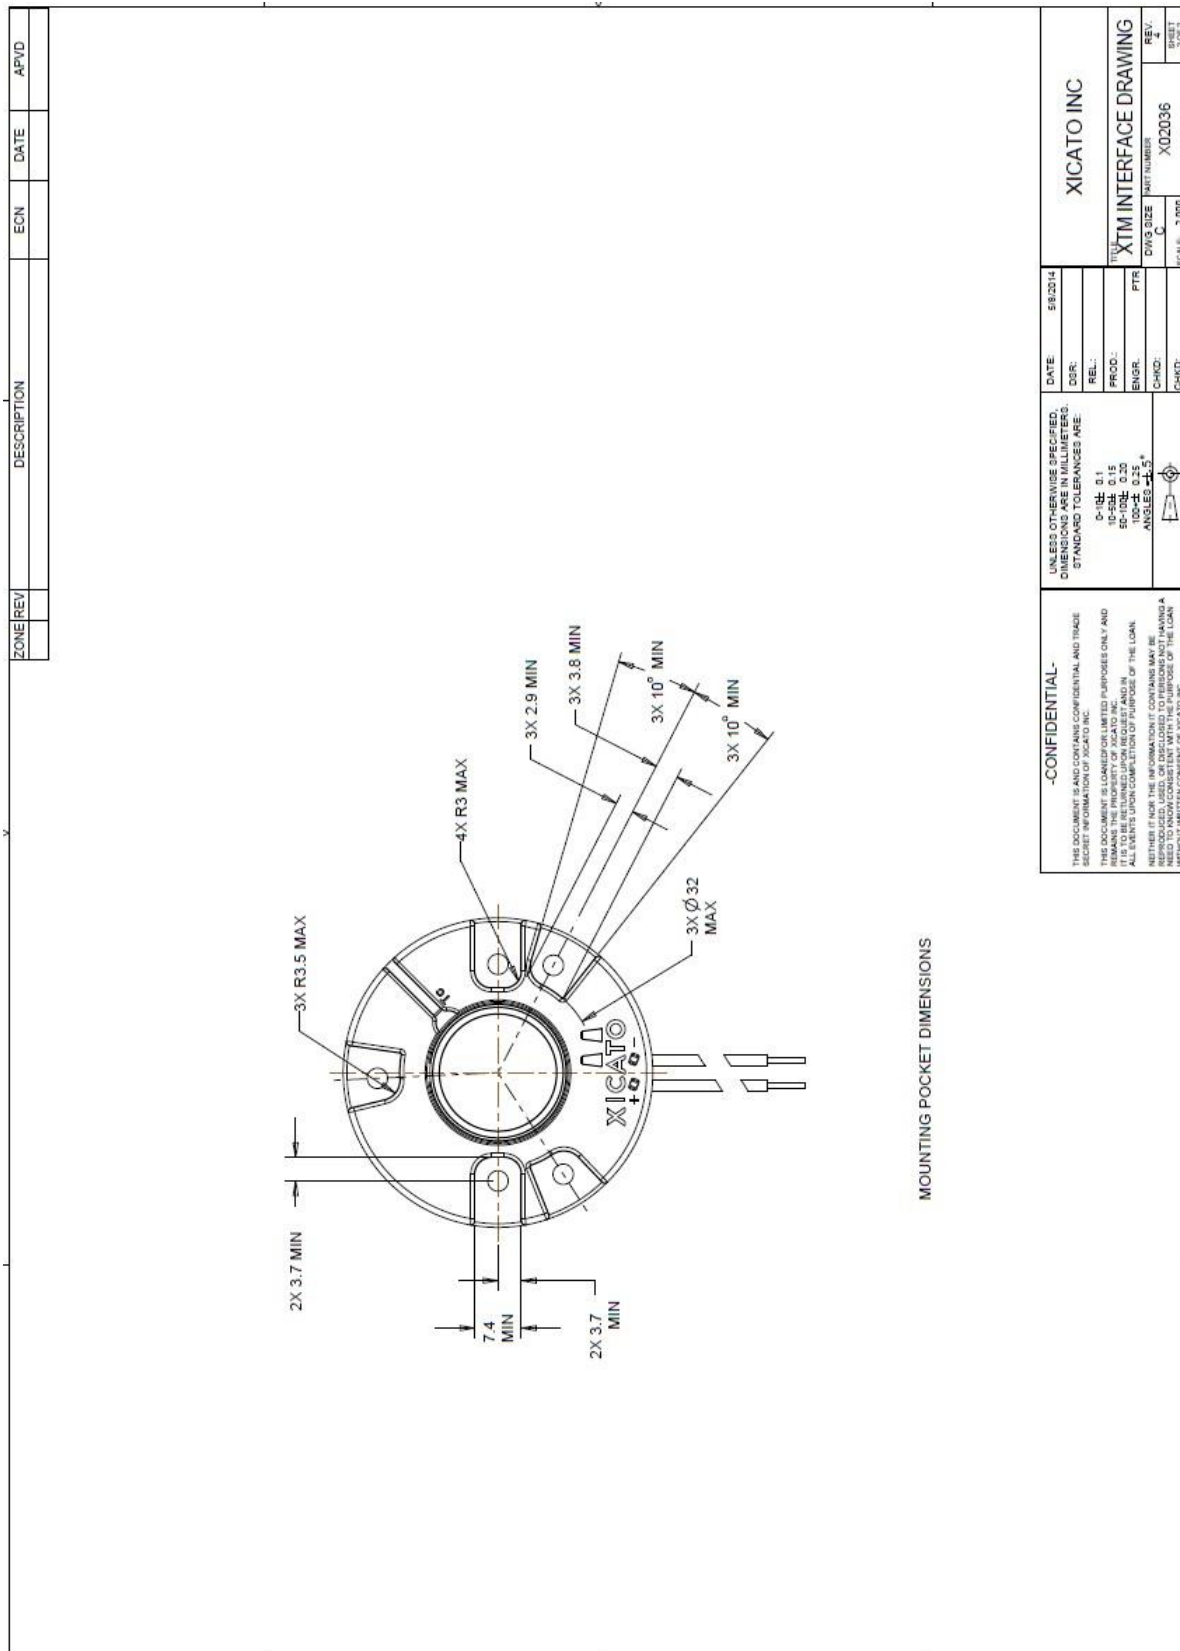



## COLOR METRICS: DESIGNER SERIES

Optimized for accurate, natural color rendering with high lumen output and efficacy.

*Designer Series is designed to balance extremely high color rendering with high lumen output and efficacy, for demanding retail, hospitality, and residential applications.*

All color rendering data at highest rated drive current and 70°C case temperature ( $T_c$ )

Tester consistency (reproducibility)  $\pm 0.0002$  Duv (CIE 1964) from NIST reference

Correlated Color Temperature: 2700K, 3000K, 3500K or 4000K nominal.

Initial Color Consistency:  $\leq 1 \times 2$  MacAdam ellipses (SDCM) at 70°C, B0

CIE CRI Minimums:  $R_a \geq 90$ ,  $R_9 \geq 50$

Color Maintenance: Group consistency maintained  $< 0.003 \Delta u'v'$  at 50,000 hours


Lumen Maintenance: L70/B0 at 50,000 hours

Warranty: 5 year for individual modules (B0) on mortality, color and lumen maintenance.  
Details at [www.xicato.com/support/warranty](http://www.xicato.com/support/warranty)


### CIE CRI COLOR METRICS (3000K TYPICAL)

	$R_a$	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	GAI
Designer Series	91	91	94	97	92	91	93	91	80	55	87	93	84	92	98	87	104


Spectral Power Distribution vs. Reference Source: 3000K

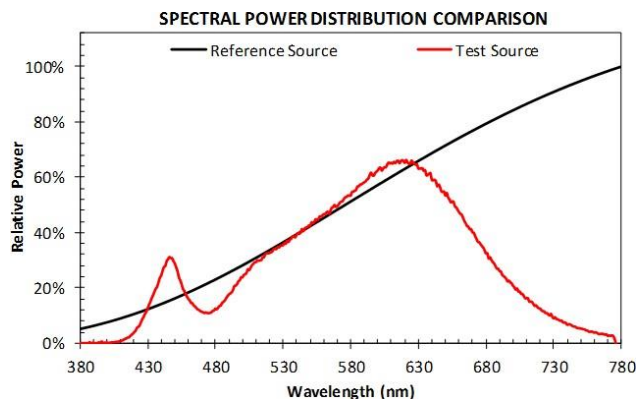


Spectral Power Distribution vs. Reference Source: 4000K

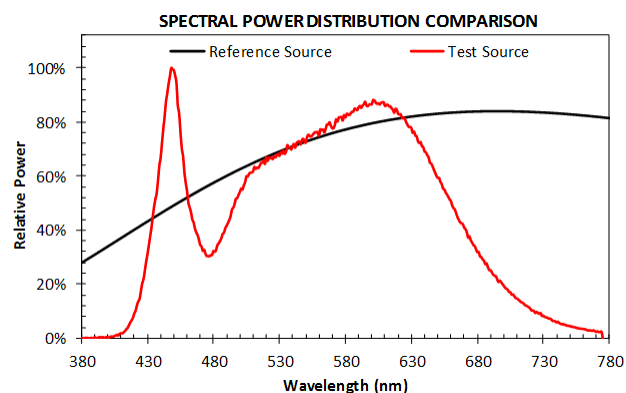

Color Consistency

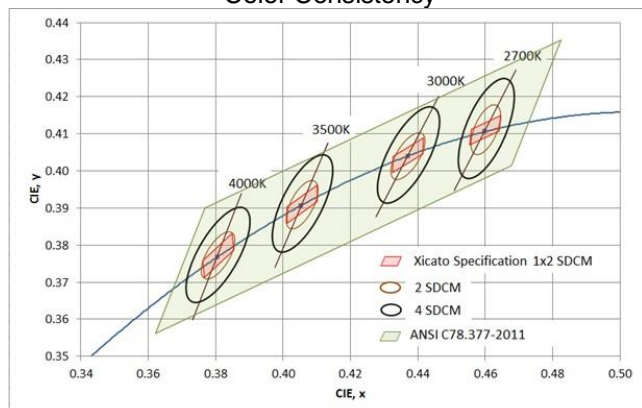

Color Maintenance

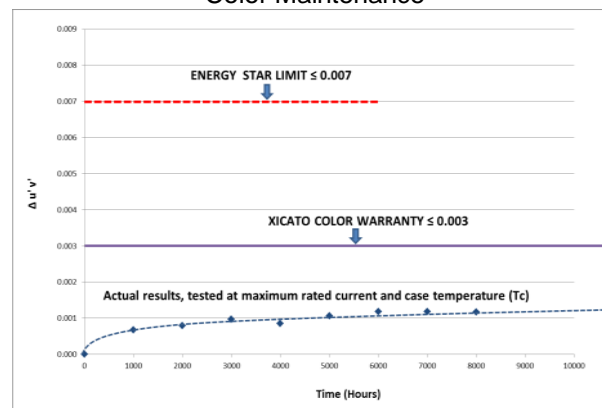

## IES TM-30 COLOR METRICS

(Values are typical. Based on 3000K CCT)

IES TM-30 Color Fidelity ( $R_f$ )  $\geq 88$

IES TM-30 Color Gamut ( $R_g$ )  $\geq 101$


### COLOR VECTOR GRAPHIC: 3000K

This plot shows the average chromaticity shift for the samples within each of 16 hue bins, which are compiled out of the 99 IES TM-30 Color Evaluation Samples. The values are normalized so that the reference is a circle.

Vector arrows indicate the direction and degree of the shift for each hue bin.

- Radial shift indicates an increase/decrease in saturation.
- Tangential shift indicates a shift in hue.

Length of arrow indicates degree of shift.

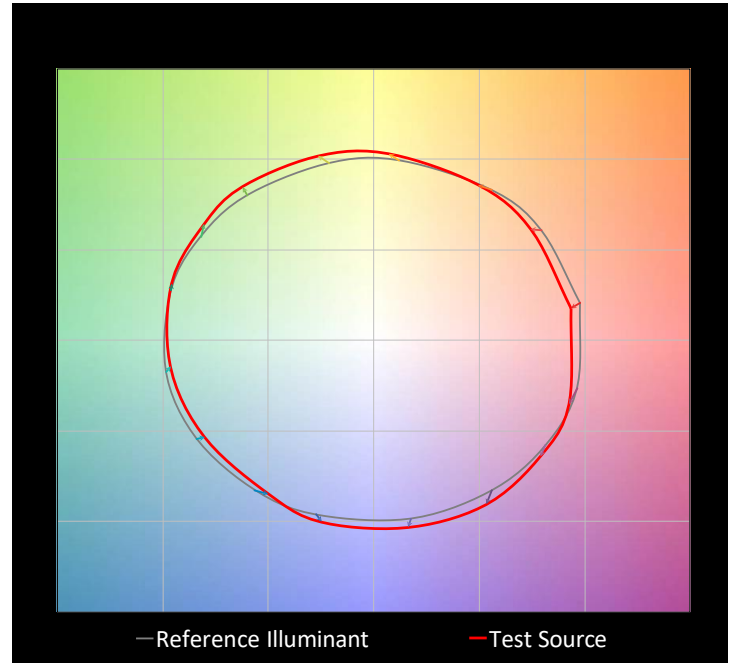


### COLOR VECTOR GRAPHIC: 4000K

This plot shows the average chromaticity shift for the samples within each of 16 hue bins, which are compiled out of the 99 IES TM-30 Color Evaluation Samples. The values are normalized so that the reference is a circle.

Vector arrows indicate the direction and degree of the shift for each hue bin.

- Radial shift indicates an increase or decrease in saturation.
- Tangential shift indicates a shift in hue.
- Length of arrow indicates the degree of shift.

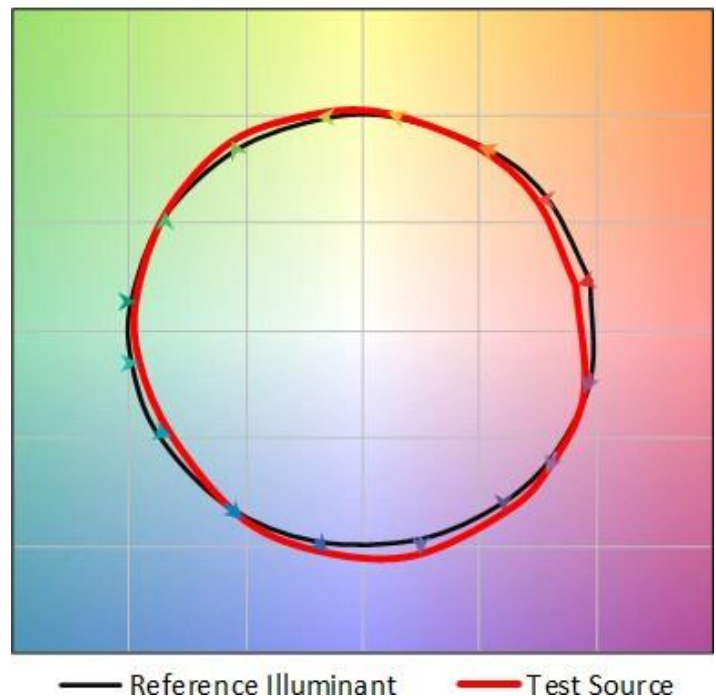

## PERFORMANCE CHARACTERISTICS

More extensive performance data is available from your Xicato sales representative.

### NOTES:

1. Data shown in the tables below are taken at a recommended operating test point (Tc) temperature of 70°C.
2. Voltage data is based on 20°C to 90°C operating range. For operation outside this range, contact Xicato.
3. Module is designed for use with a constant current power supply with maximum output current, including tolerance, of up to 770mA (700mA), 1100mA (1050mA), and 1500mA (1400mA).
4. Minimum and Maximum power consumption can be calculated from the ranges provided.
5. Absolute range of lumen output is  $\pm 10\%$  of typical value
6. CCT data ANSI/NEMA compliant.
7. Specifications are subject to change without notice.

## INITIAL COLOR CONSISTENCY

Correlated Color Temp		Initial Color Consistency		
Nominal	Actual	CCT	SDCM	Duv
<b>2700K</b>	2700K	$\pm 40K$	$\leq 1 \times 2$	$\pm 0.001$
<b>3000K</b>	2950K	$\pm 50K$		
<b>3500K</b>	3420K	$\pm 60K$		
<b>4000K</b>	4000K	$\pm 70K$		

## ELECTRICAL & EFFICACY PERFORMANCE

Specifications based on 3000K

LES	Module	Current	Forward Voltage			Typ. Power Consumption	Actual Output	Efficacy (Typical)
		mA	Min	Typical	Max	(W)	(Lm)	Lm/W
9mm	700 lm	700	9.9	11.1	12.0	7.8	700	90
		500	9.6	10.8	11.7	5.4	550	102
		350	9.4	10.6	11.4	3.7	400	108
	1300 lm	700	17.3	22.3	27.0	15.6	1300	83
		500	16.8	21.7	26.3	10.9	965	89
		350	16.4	21.2	25.8	7.4	720	97
	2000 lm	1050	23.1	28.8	31.0	30.2	2000	66
		700	22.2	27.9	30.0	19.5	1400	72
		500	21.6	27.1	29.2	13.6	1055	78
		350	21.0	26.5	28.6	9.3	800	86

LES	Module	Current	Forward Voltage			Typ. Power Consumption	Lumen Output	Efficacy (Typical)
		mA	Min	Typical	Max	(W)	(Lm)	Lm/W
19mm	1300 lm	700	14.8	16.3	18.0	11.4	1300	114
		500	14.4	15.8	17.5	7.9	965	122
		350	14.0	15.5	17.2	5.4	720	133
	2000 lm	700	22.2	24.4	30.0	17.1	2000	117
		500	21.6	25.8	31.5	12.9	1490	116
		350	21.0	23.2	28.6	8.1	1105	136
	3000 lm	1050	22.2	24.4	30.0	25.7	3000	117
		700	21.5	23.6	29.1	16.5	2100	127
		500	21.0	23.1	28.6	11.6	1585	137
		350	20.6	22.8	28.1	8.0	1195	150
	4500 lm	1400	28.6	29.9	36.0	41.8	4500	108
		1050	27.7	29.0	35.1	30.5	3465	114
		700	27.1	28.4	34.3	19.9	2430	122
		500	26.6	27.9	33.8	13.9	1827	131


## BASIC HANDLING AND ASSEMBLY

### GENERAL HANDLING

Make sure your **hands and tools are clean** before handling module.

**Do not drop** module or allow modules to rattle in a loosely packed container. This may loosen the LED array from its protective holder, or scratch the phosphor or thermal interface pad.

**Do not touch the phosphor coating** on top of the LED array (the light emitting surface) **or the integrated thermal pad** underneath. These surfaces are sensitive to scratches, contamination, and debris which may decrease module performance. If any dust or debris accumulates on either surface, clean the surface by blowing on it with clean air. The phosphor surface can also be cleaned by gently wiping with isopropyl alcohol.

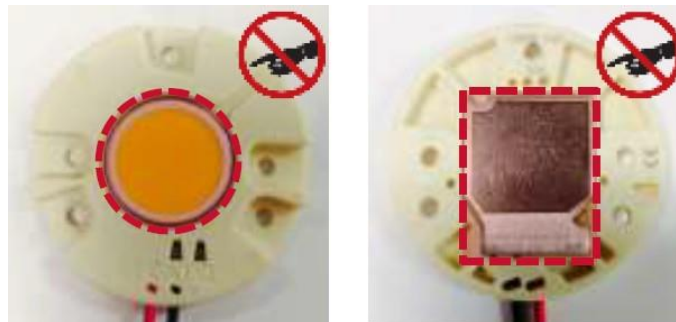

Do not touch sensitive surfaces. Keep them clean.

**Take special care not to press down on the phosphor surface** of the array. Pressure to this area may cause the array to dislodge itself from its protective plastic housing.

### ASSEMBLY

Always use recommended screws and fasteners, and apply recommended torque. Take caution not to exceed these values as this may damage the module. Xicato recommends using a spring lock washer with either a flat washer or adapter ring at all mounting locations to reduce the likelihood that the fasteners will loosen under shock, vibration, or thermal cycling.

Be sure not to reverse polarity on the electrical leads to the module, as this will damage the LED array. Be absolutely certain to use the proper wire gauge and color and, when required, poke them into the proper connector. One-time poke-in connectors are not guaranteed to function properly if wires are pulled loose and reinserted.

Make sure that surfaces of thermal interface pad and heat sink are clean and free of debris before assembly. Visually verify that there are no gaps between thermal surfaces, and that pressure has been evenly applied across the entire surface.

Please note that Xicato is the only authorized distributor and supplier of twist-lock adaptor rings. For more information on adaptor ring options, contact your XICATO account manager or technical representative.

**For more detailed handling and assembly instructions**, including:

- How to properly reinsert an LED array into its holder
- How to mount reflectors, adapters, fasteners
- How to mount unit to heat sinks
- How to mount spacers
- How to test the module for thermal performance

...and more, please see Application Note - XTM Assembly Instructions on the Xicato website.

## REGULATORY INFORMATION

### DRIVE CURRENT

The product is designed for use with a constant current power supply. Refer to the Technical Data table for details on current and forward voltage limitations.

### ELECTRICAL SAFETY & HANDLING

CE: IEC 62031:2008, Class III

UL: 8750 recognized Class 2. Suitable for dry and damp locations.

Ingress Protection rating: IP-20

CSA: C22.2 No. 250.13-12.

ESD Class 3B (HBM). No special ESD handling procedures required.

### EYE SAFETY

The product is tested in accordance with IEC 62471 and is rated as exempt for Actinic UV, and Near UV. For Blue Light it is rated for Risk Group 1.

### CHEMICAL SAFETY

The following chemicals should be avoided, even in small quantities, within the module:

Hydrochloric Acid	MEK (Methyl Ethly Ketone)	Dichloromethane
Sulfuric Acid	MIBK (Methyl Isobutyl Ketone)	Rosin Flux Solder
Nitric Acid	Toluene	Castor Oil
Acetic Acid	Xylene	Lard Oil
Sodium Hydroxide	Benzene	Linseed Oil
Potassium Hydroxide	Gasoline	Petroleum Oil
Ammonia	Mineral Spirits	Silicone Oil
Sulfur (Used in Rubber Processing)	Tetracholoromethane (Carbon tetrachloride – CCl <sub>4</sub> )	Halogenated Hydrocarbons (Containing F, Cl, or Br)

### ENVIRONMENTAL SAFETY

RoHS compliant

Lead content: None

Mercury content: None

UV or IRC Emissions: None

### OTHER

Zhaga compliant

## LUMINAIRE SPECIFICATION: RECOMMENDED LED MODULE

### GENERAL DESCRIPTION


Initial Color Consistency:	$\leq 1 \times 2$ MacAdam Ellipses Every light source shall be within a $1 \times 2$ MacAdam Ellipse (1x2 SDCM) Flux and color point tuned at case temperature 70°C
Initial Color Point Accuracy:	within $\pm 0.001$ Duv of Black Body Locus (BBL)
Color Maintenance:	Products in a contiguous space remain within 3 MacAdam Ellipses (C3) at 50,000 hours at maximum operating drive current and maximum case temperature (90°C). LM-80 data shall show Duv < 0.003 at 6,000 hours.
Lumen Maintenance:	LM better than 70% (L70, B0, F0) at 50,000 hours at maximum operating drive current and maximum case temperature (90°C). LM-80 data shall show LM > 94.8% at 6,000 hours.
Phosphor Technology:	Corrected Cold Phosphor® technology.
Warranty:	5 years, including minimum on mortality, lumen maintenance, and color maintenance. Mortality: B0, F0 – No failures. Lumen maintenance: L70, B0 (better than 70% on <u>all</u> units). Color maintenance: < 0.003 $\Delta u'v'$ at 50,000 hours

### DETAILED COLOR SPECIFICATIONS

IES TM-30-15 Color rendering fidelity ( $R_f$ ) shall be  $\geq 89$   
 IES TM-30-15 Color rendering gamut ( $R_g$ ) shall be  $\geq 101$   
 CIE CRI ( $R_a$ ) shall be  $\geq 90$ ; R9 shall be  $\geq 50$   
 Typical CIE CRI R values at 3000K shall be:

R1: 91	R9: 55
R2: 94	R10: 87
R3: 97	R11: 93
R4: 92	R12: 84
R5: 91	R13: 92
R6: 93	R14: 98
R7: 91	R15: 87
R8: 80	

COLOR VECTOR GRAPHIC

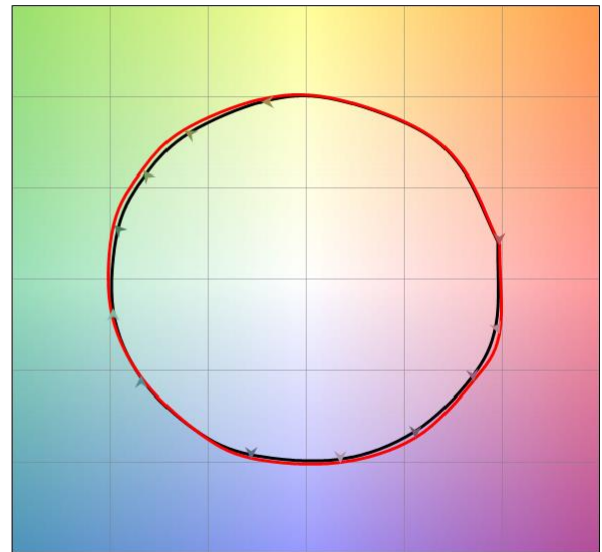

— Reference Source — Test Source

LED module shall be Xicato Module # \_\_\_\_\_