
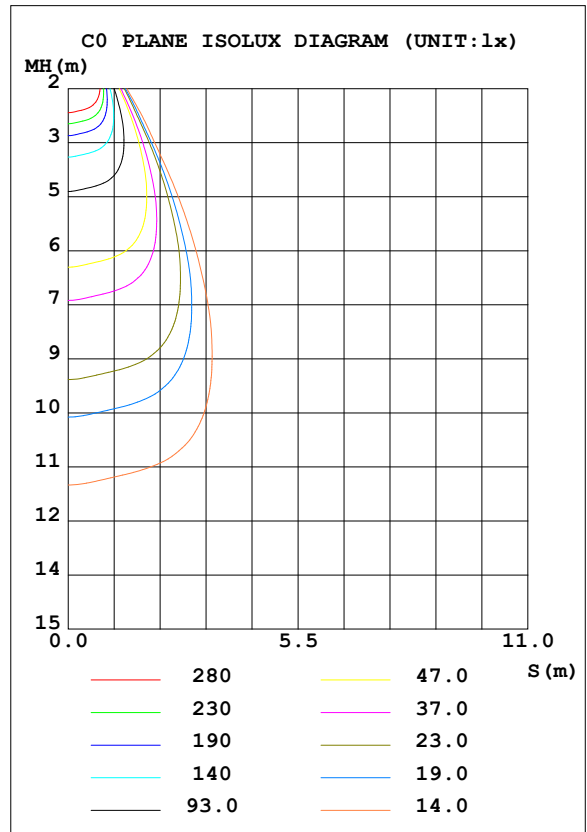


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.97 lm/W			
MODEL	XICATO-3000K	I _{max} (cd)	1902	S/MH (C0/180)	0.71
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	0.69
RATED VOLTAGE (V)	18	TOTAL FLUX (lm)	1138.3	η UP, DN (C0-180)	0.0, 52.7
NOMINAL FLUX (lm)	1138.27	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 47.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	18.1	η down (%)	100.0	CIBSE SHR MAX	0.70

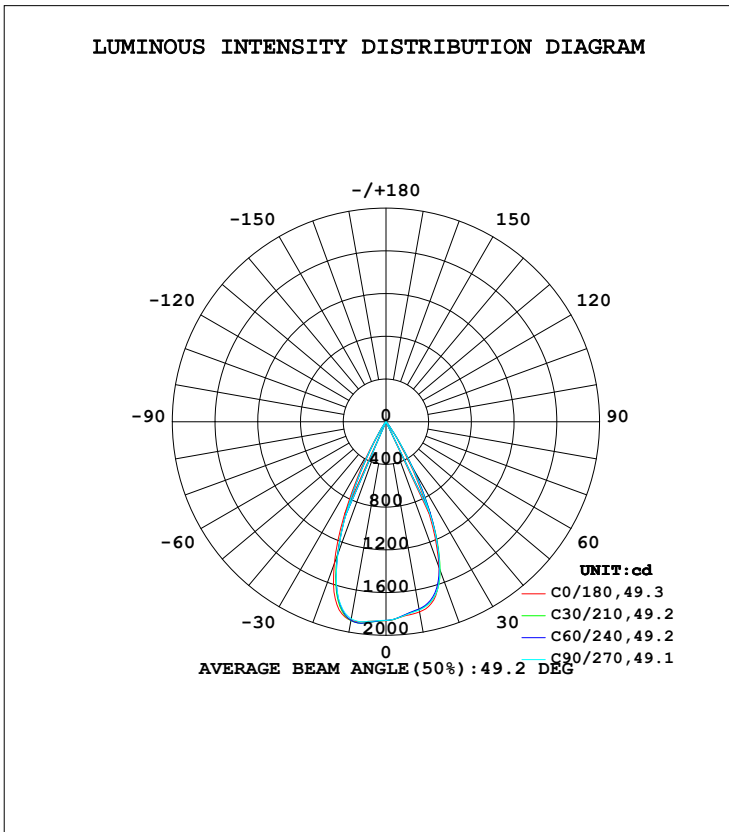

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1807	1783	1791	1846	1888	1890	1873	1846	0- 10	176.6	176.6	15.5,15.5
20	1455	1472	1476	1485	1416	1332	1322	1402	10- 20	475.3	651.9	57.3,57.3
30	433.6	513.5	490.9	397.5	292.0	236.6	249.6	316.4	20- 30	399.5	1051	92.4,92.4
40	34.90	39.81	38.90	32.48	26.98	25.05	25.67	29.44	30- 40	77.25	1129	99.2,99.2
50	1.990	2.140	2.134	1.811	1.497	1.482	1.381	1.662	40- 50	8.755	1137	99.9,99.9
60	0.2998	0.2651	0.2238	0.2652	0.2442	0.2482	0.2790	0.2515	50- 60	0.6107	1138	100,100
70	0.0815	0.0578	0.0476	0.0647	0.0476	0.0748	0.0952	0.0646	60- 70	0.1187	1138	100,100
80	0.0544	0.0476	0.0476	0.0476	0.0476	0.0510	0.0544	0.0578	70- 80	0.0577	1138	100,100
90	0.0476	0.0476	0.0476	0.0476	0.0476	0.0476	0.0476	0.0476	80- 90	0.0548	1138	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1135.5 lm

%lum = 99.8%
 %lamp = 99.8%

Conical surface Flux(120deg): 1138 lm

%lum = 100.0%
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:1135.5 %lum: 99.8%
 135 - 180 DEG Zonal Flux:0 %lum: 0.0%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 3.6%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 5.5%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

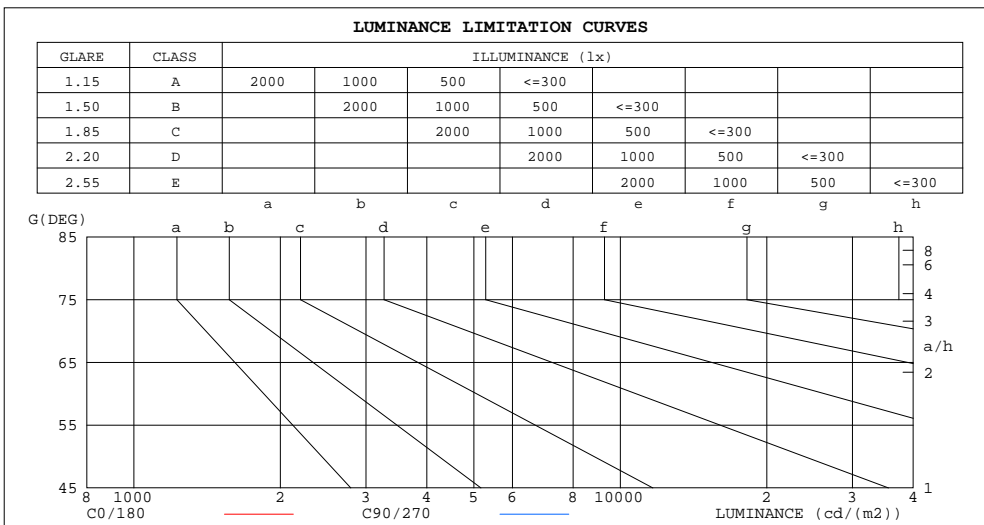

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	30	27
80	15	13
75	10	9
70	12	7
65	12	6
60	29	22
55	59	55
50	150	161
45	676	702


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	.00	.96	.92	.99	.95	.92	.96	.93	.90	.94	.91	.89	.91	.89	.87	.86
4.0	.95	.90	.86	.94	.89	.86	.92	.88	.85	.90	.87	.84	.88	.85	.83	.82
5.0	.90	.85	.81	.89	.85	.81	.87	.83	.80	.86	.82	.80	.84	.81	.79	.78
6.0	.86	.81	.77	.85	.80	.77	.84	.79	.76	.82	.79	.76	.81	.78	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.74	.72	.71
8.0	.78	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.67
9.0	.75	.70	.66	.74	.69	.66	.73	.69	.66	.73	.69	.66	.72	.68	.66	.64
10.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.70	.66	.63	.69	.65	.63	.62

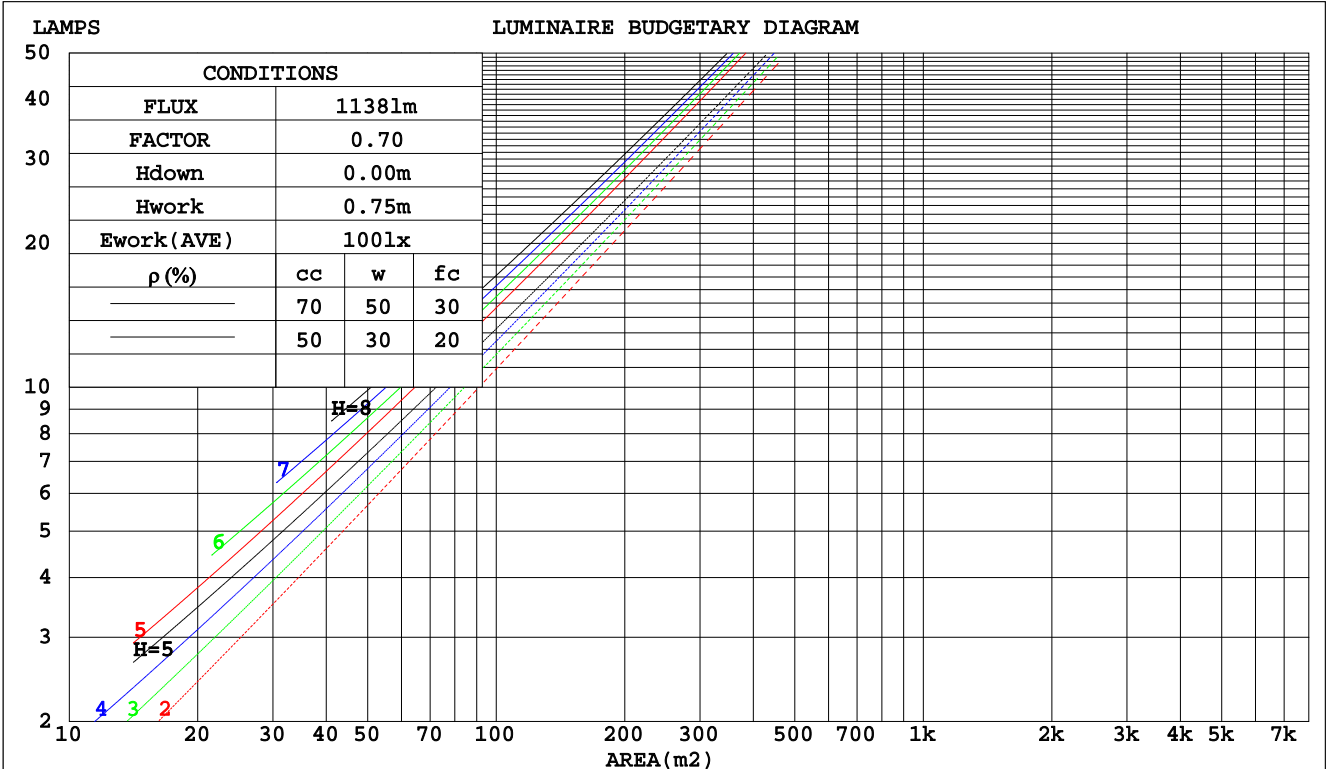

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz		
Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.156	.089	.028	.149	.085	.027	.137	.078	.025	.125	.072	.023	.115	.066	.021	
2.0	.147	.080	.025	.141	.078	.024	.131	.073	.023	.121	.068	.021	.112	.064	.020	
3.0	.139	.074	.022	.134	.072	.022	.125	.068	.021	.117	.064	.020	.110	.061	.019	
4.0	.131	.068	.020	.127	.067	.020	.120	.064	.019	.113	.061	.018	.107	.058	.018	
5.0	.125	.064	.018	.122	.062	.018	.115	.060	.018	.109	.058	.017	.104	.055	.017	
6.0	.119	.060	.017	.116	.059	.017	.111	.057	.017	.106	.055	.016	.101	.053	.016	
7.0	.114	.057	.016	.112	.056	.016	.107	.054	.016	.102	.052	.015	.098	.051	.015	
8.0	.110	.054	.015	.107	.053	.015	.103	.051	.015	.099	.050	.014	.095	.049	.014	
9.0	.105	.051	.014	.103	.050	.014	.099	.049	.014	.096	.048	.014	.092	.047	.014	
10.0	.101	.049	.014	.100	.048	.013	.096	.047	.013	.093	.046	.013	.090	.045	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.056	.047	.040	.033	.015	.013	.011	
4.0	.128	.098	.076	.110	.085	.066	.075	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.118	.086	.063	.102	.075	.055	.070	.052	.039	.041	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.095	.066	.046	.065	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.103	.069	.045	.089	.060	.039	.062	.042	.028	.036	.025	.016	.012	.008	.005	
8.0	.098	.063	.038	.084	.054	.033	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.092	.057	.033	.080	.050	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.088	.053	.029	.076	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.8	8.6	8.0	8.7	8.9	8.4	9.2	8.6	9.3	9.5
3H	7.6	8.4	7.9	8.6	8.8	8.2	8.9	8.5	9.1	9.3
4H	7.5	8.2	7.8	8.5	8.7	8.1	8.8	8.4	9.0	9.2
6H	7.5	8.1	7.8	8.3	8.6	8.0	8.7	8.3	8.9	9.2
8H	7.4	8.0	7.7	8.3	8.5	8.0	8.6	8.3	8.9	9.1
12H	7.4	8.0	7.7	8.2	8.5	7.9	8.5	8.3	8.8	9.1
4H 2H	7.5	8.2	7.8	8.5	8.7	8.1	8.8	8.4	9.0	9.2
3H	7.4	8.0	7.7	8.2	8.5	7.9	8.5	8.3	8.8	9.1
4H	7.3	7.8	7.6	8.1	8.4	7.8	8.4	8.2	8.7	9.0
6H	7.2	7.7	7.5	8.0	8.3	7.7	8.2	8.1	8.6	8.9
8H	7.1	7.6	7.5	7.9	8.3	7.7	8.1	8.1	8.5	8.9
12H	7.1	7.5	7.5	7.9	8.2	7.6	8.1	8.1	8.4	8.8
8H 4H	7.1	7.6	7.5	7.9	8.3	7.7	8.1	8.1	8.5	8.9
6H	7.0	7.4	7.4	7.8	8.2	7.6	8.0	8.0	8.4	8.8
8H	7.0	7.3	7.4	7.7	8.1	7.5	7.9	8.0	8.3	8.7
12H	6.9	7.2	7.4	7.6	8.1	7.5	7.8	7.9	8.2	8.7
12H 4H	7.1	7.5	7.5	7.9	8.2	7.6	8.1	8.0	8.4	8.8
6H	7.0	7.3	7.4	7.7	8.1	7.5	7.9	8.0	8.3	8.7
8H	6.9	7.2	7.4	7.6	8.1	7.5	7.8	7.9	8.2	8.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.5 / -21.4					+ 4.1 / -22.5				
1.5H	+ 6.1 / -18.7					+ 6.8 / -18.9				
2.0H	+ 8.0 / -13.5					+ 8.3 / -12.8				

CIE Pub.117, 1138 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.4$)
Area: 0.0206015 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	82	91	85	82	90	85	82	79
0.80	98	93	90	97	92	89	96	92	89	86
1.00	102	97	94	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

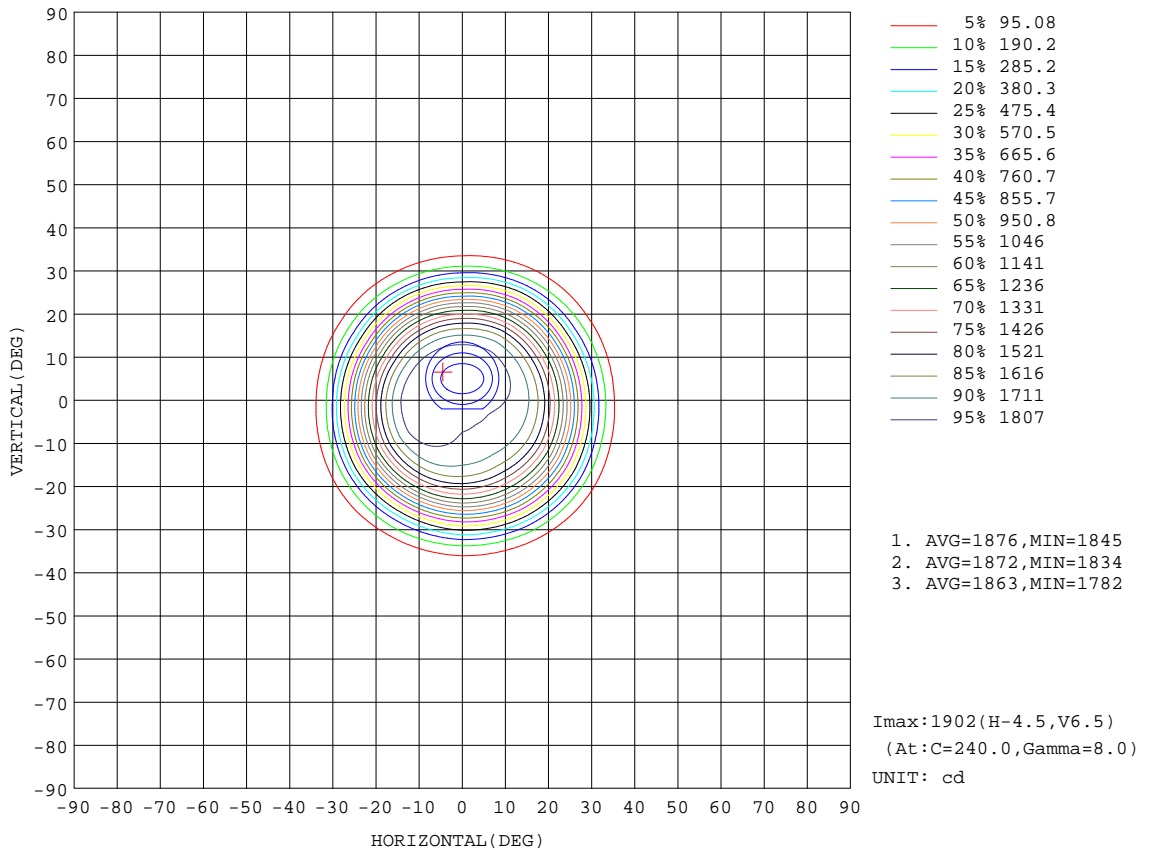


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

AAI Figure

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:896.2 lm

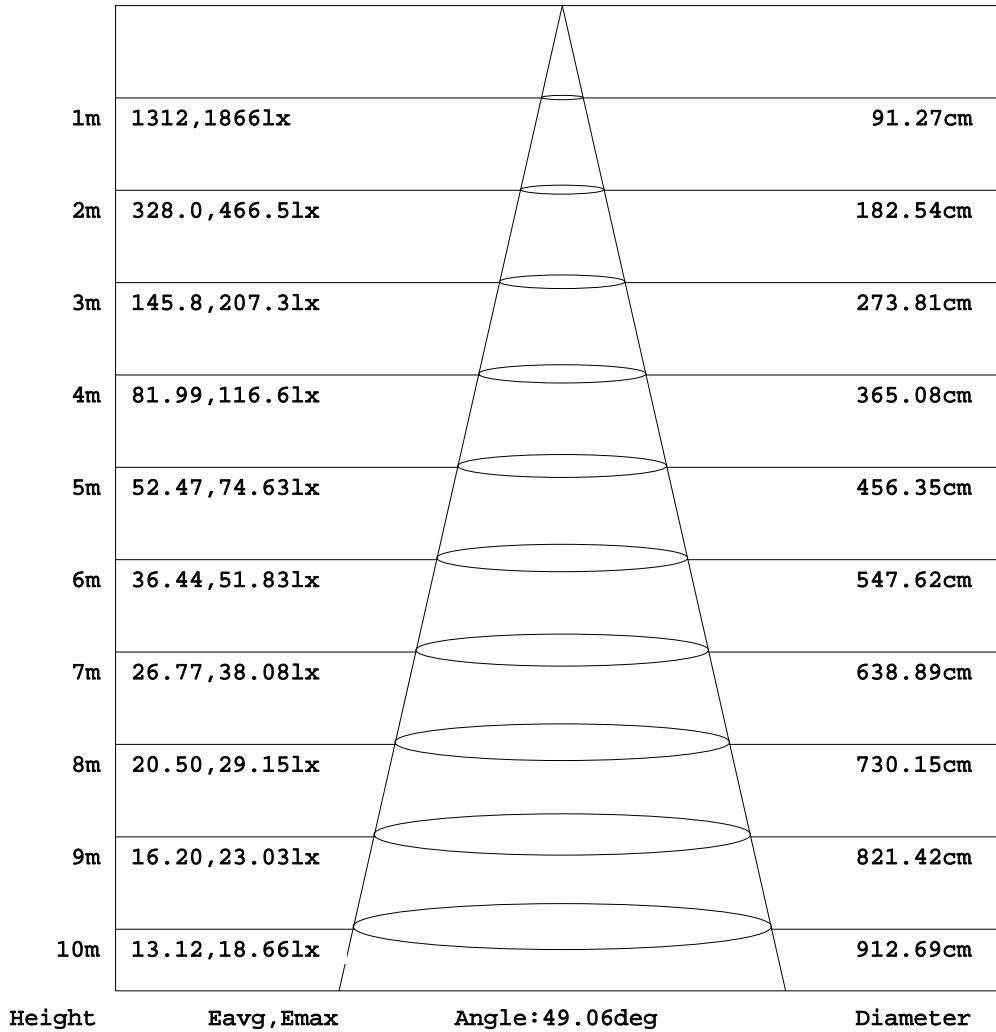


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

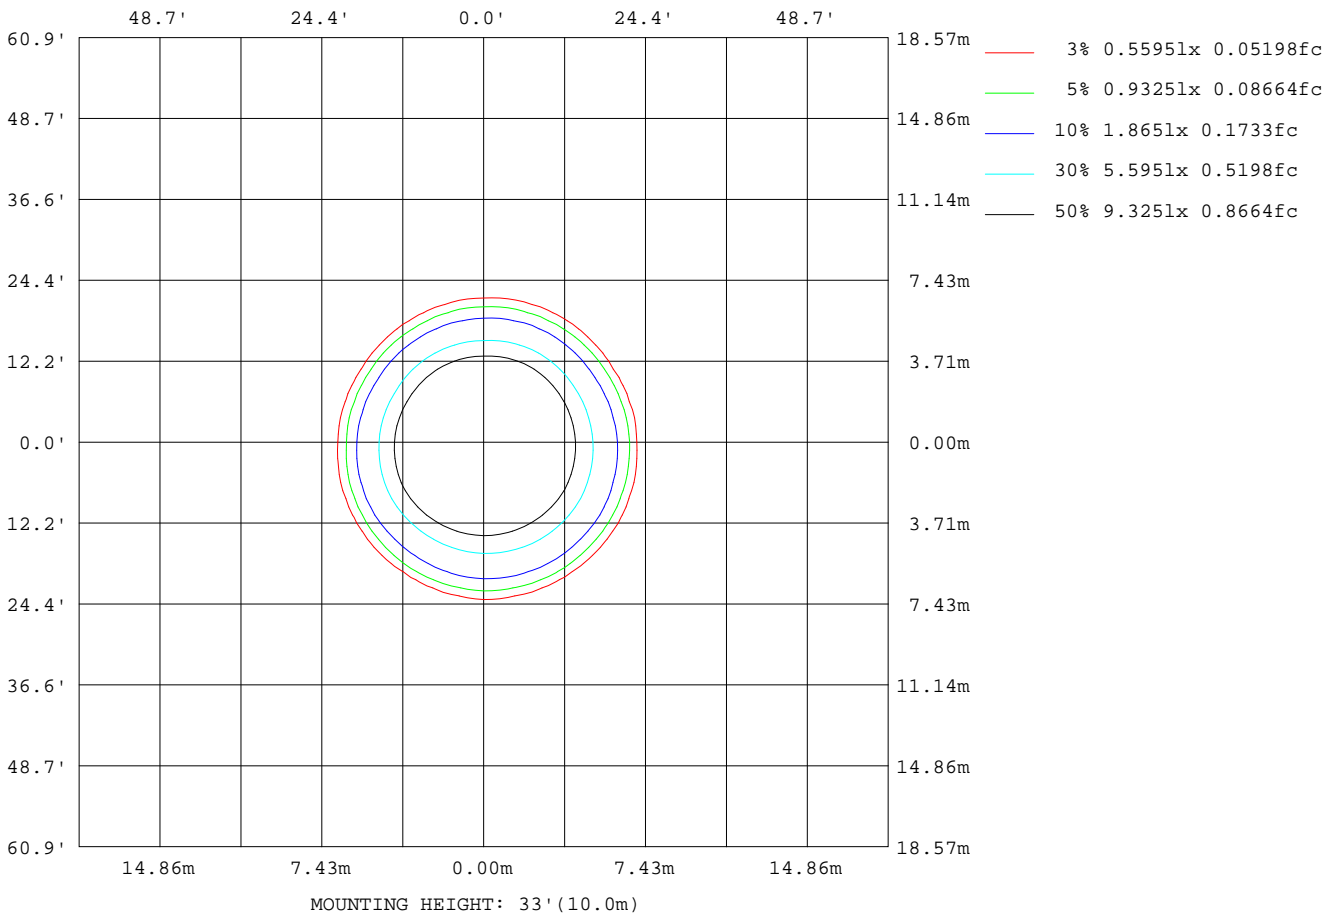

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	11
L_0~180 (75) av	10
L_0~180 (85) av	28
L_90~270 (65) av	11
L_90~270 (75) av	10
L_90~270 (85) av	28
L_45 (65) av	11
L_45 (75) av	10
L_45 (85) av	28

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

Planar Illuminance Curve

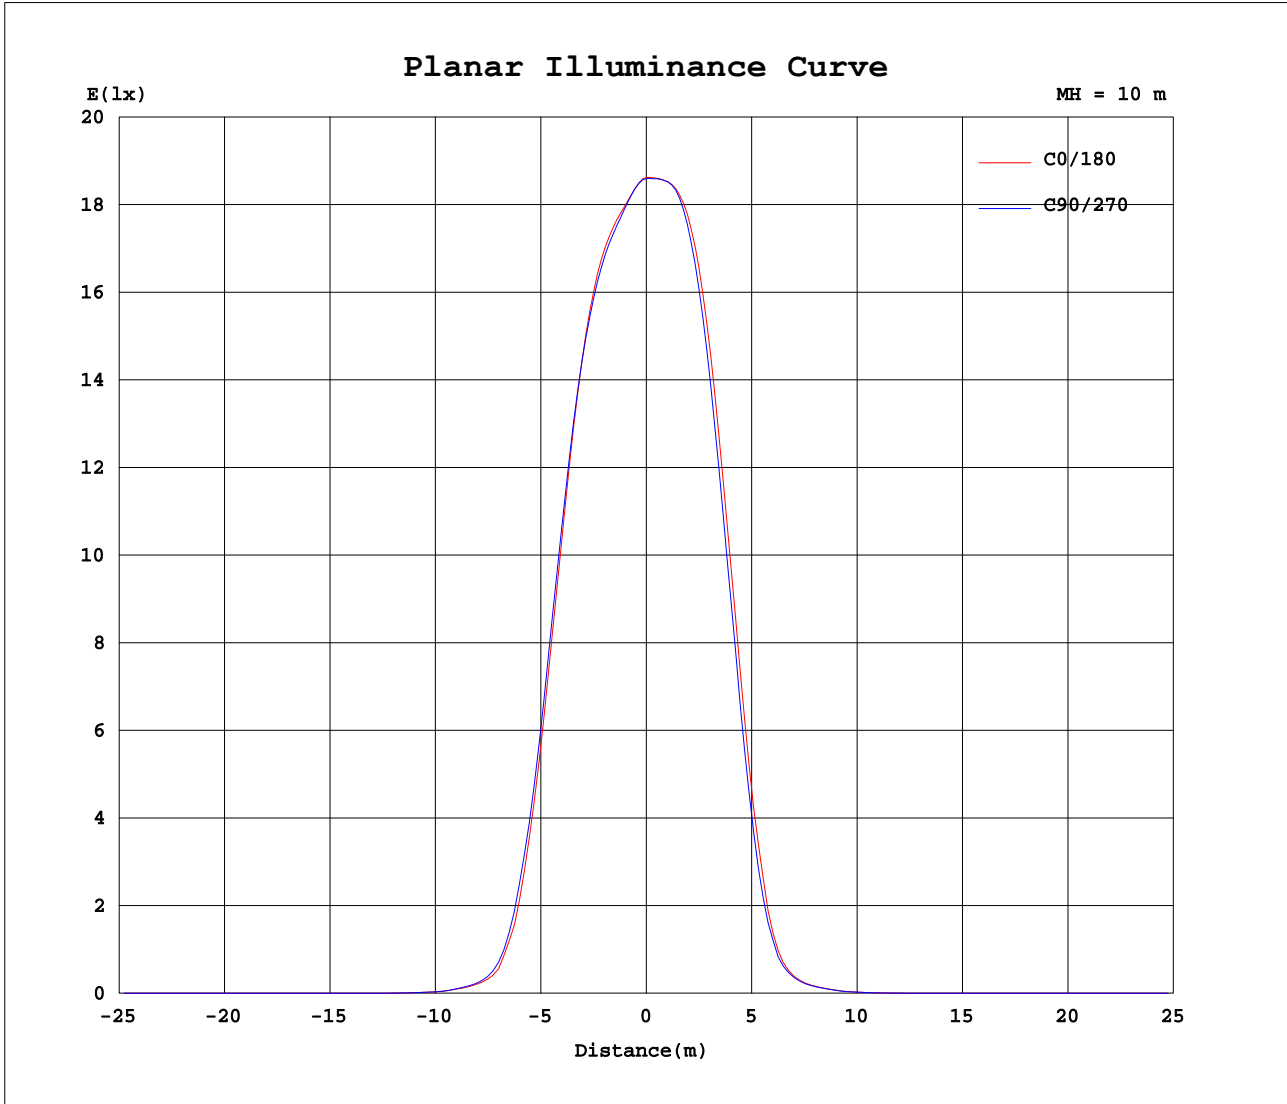

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:18.100V I:0.6990A P:12.652W PF:1.0000 Freq:0Hz Lamp Flux:1138.27x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1862	1861	1860	1860	1859	1859	1862	1861	1860	1860	1859	1859						
5	1829	1825	1822	1827	1837	1855	1876	1887	1886	1876	1860	1841						
10	1807	1785	1780	1791	1826	1866	1888	1891	1889	1873	1858	1834						
15	1728	1713	1697	1713	1758	1790	1775	1736	1721	1715	1740	1730						
20	1455	1483	1462	1476	1486	1483	1416	1338	1326	1322	1390	1414						
25	966	1042	1039	1018	971	944	840	750	747	745	838	887						
30	434	511	516	491	414	381	292	239	234	250	298	334						
35	102	128	131	129	100	86.4	71.2	62.6	63.1	66.2	75.8	82.2						
40	34.9	39.9	39.8	38.9	33.6	31.3	27.0	25.0	25.1	25.7	28.4	30.5						
45	9.85	10.9	10.2	10.2	9.15	9.01	7.87	7.56	7.63	7.58	8.29	8.66						
50	1.99	2.30	1.98	2.13	1.79	1.84	1.50	1.48	1.49	1.38	1.53	1.79						
55	0.69	0.67	0.72	0.64	0.69	0.62	0.60	0.64	0.54	0.61	0.56	0.62						
60	0.30	0.24	0.29	0.22	0.29	0.24	0.24	0.29	0.21	0.28	0.21	0.29						
65	0.10	0.05	0.10	0.05	0.12	0.10	0.09	0.15	0.08	0.13	0.07	0.12						
70	0.08	0.05	0.07	0.05	0.08	0.05	0.05	0.10	0.05	0.10	0.05	0.08						
75	0.05	0.05	0.05	0.05	0.07	0.05	0.05	0.05	0.05	0.05	0.05	0.07						
80	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.07						
85	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.07						
90	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks: