
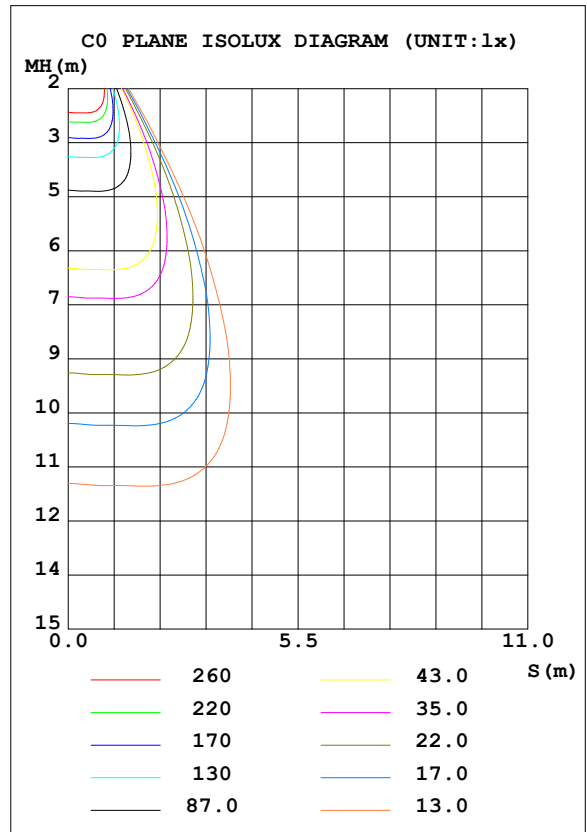


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 81.62 lm/W			
MODEL	XICATO-3000K	I _{max} (cd)	1847	S/MH (C0/180)	0.72
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	0.76
RATED VOLTAGE (V)	21	TOTAL FLUX (lm)	1186.6	η UP, DN (C0-180)	0.0, 50.5
NOMINAL FLUX (lm)	1186.62	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	20.8	η down (%)	100.0	CIBSE SHR MAX	0.75

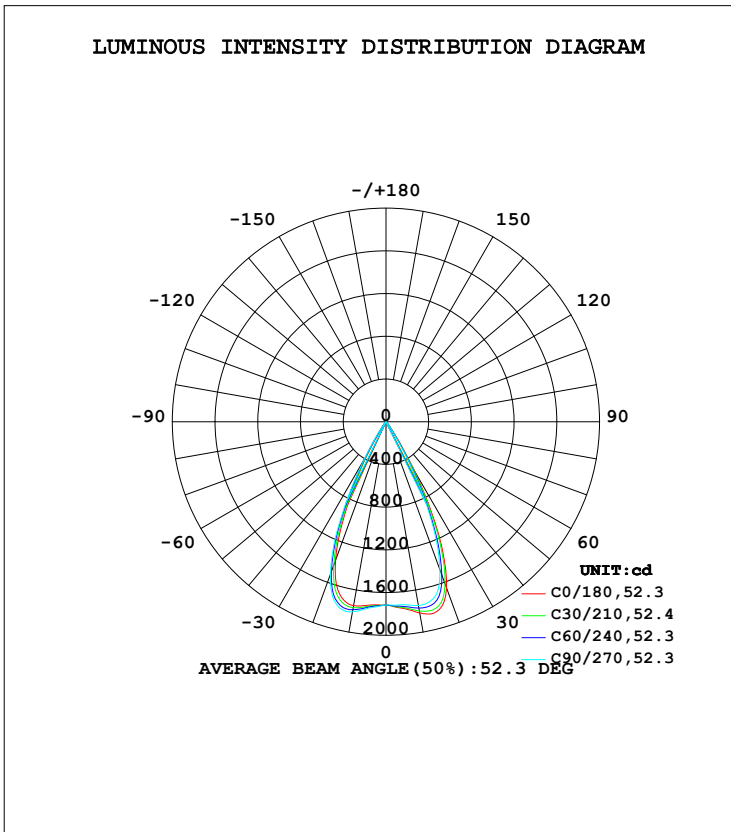

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1818	1785	1746	1730	1748	1777	1807	1822	0- 10	167.2	167.2	14.1,14.1
20	1659	1574	1477	1434	1380	1463	1524	1594	10- 20	483.3	650.5	54.8,54.8
30	548.9	476.7	425.8	381.5	313.5	380.4	423.9	467.3	20- 30	443.2	1094	92.2,92.2
40	38.13	33.31	29.08	26.09	22.62	26.52	30.43	33.79	30- 40	84.09	1178	99.3,99.3
50	2.803	2.245	1.619	1.121	0.9363	1.220	1.984	2.142	40- 50	7.981	1186	99.9,99.9
60	0.3746	0.2720	0.1900	0.2006	0.1761	0.2616	0.3402	0.2991	50- 60	0.6117	1186	100,100
70	0.1020	0.0612	0.0476	0.0544	0.0613	0.0919	0.0954	0.0782	60- 70	0.1293	1187	100,100
80	0.0544	0.0476	0.0476	0.0442	0.0680	0.0544	0.0476	0.0510	70- 80	0.0601	1187	100,100
90	0.0476	0.0442	0.0476	0.0442	0.0680	0.0510	0.0476	0.0476	80- 90	0.0546	1187	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1184 lm

%lum = 99.8%
 %lamp = 99.8%

Conical surface Flux(120deg): 1186.4 lm

%lum = 100.0%
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:1184 %lum: 99.8%
 135 - 180 DEG Zonal Flux:0 %lum: 0.0%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 3.5%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 5.3%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

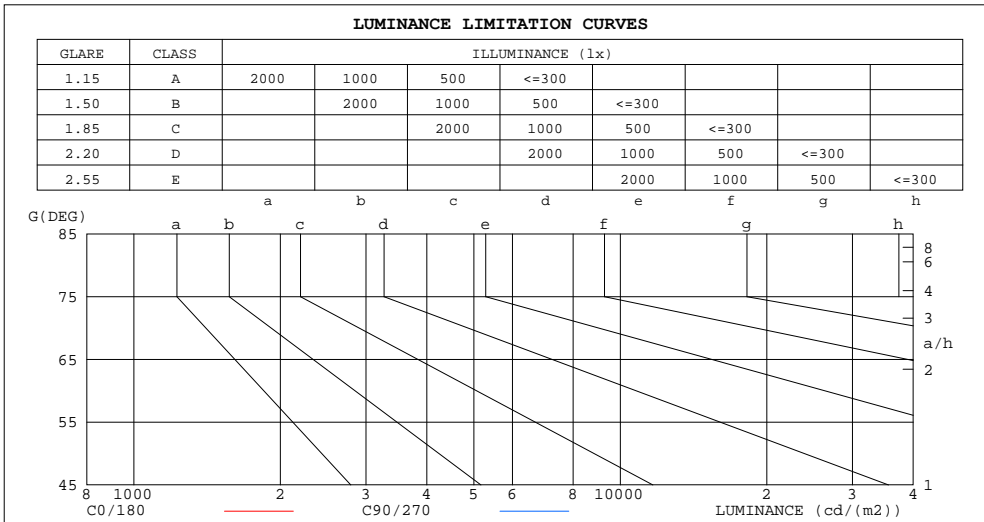

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	30	27
80	15	13
75	10	9
70	14	7
65	19	5
60	36	18
55	68	48
50	212	122
45	737	529


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.05	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	.00	.95	.92	.98	.94	.91	.96	.92	.90	.93	.91	.88	.91	.89	.87	.86
4.0	.94	.90	.86	.93	.89	.85	.91	.87	.85	.89	.86	.84	.87	.85	.83	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.85	.82	.79	.84	.81	.79	.77
6.0	.85	.80	.76	.84	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.75	.73
7.0	.81	.76	.72	.80	.76	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.70
8.0	.77	.72	.69	.77	.72	.69	.76	.71	.68	.75	.71	.68	.74	.70	.68	.67
9.0	.74	.69	.65	.73	.69	.65	.73	.68	.65	.72	.68	.65	.71	.67	.65	.64
10.0	.71	.66	.62	.70	.65	.62	.70	.65	.62	.69	.65	.62	.68	.64	.62	.61

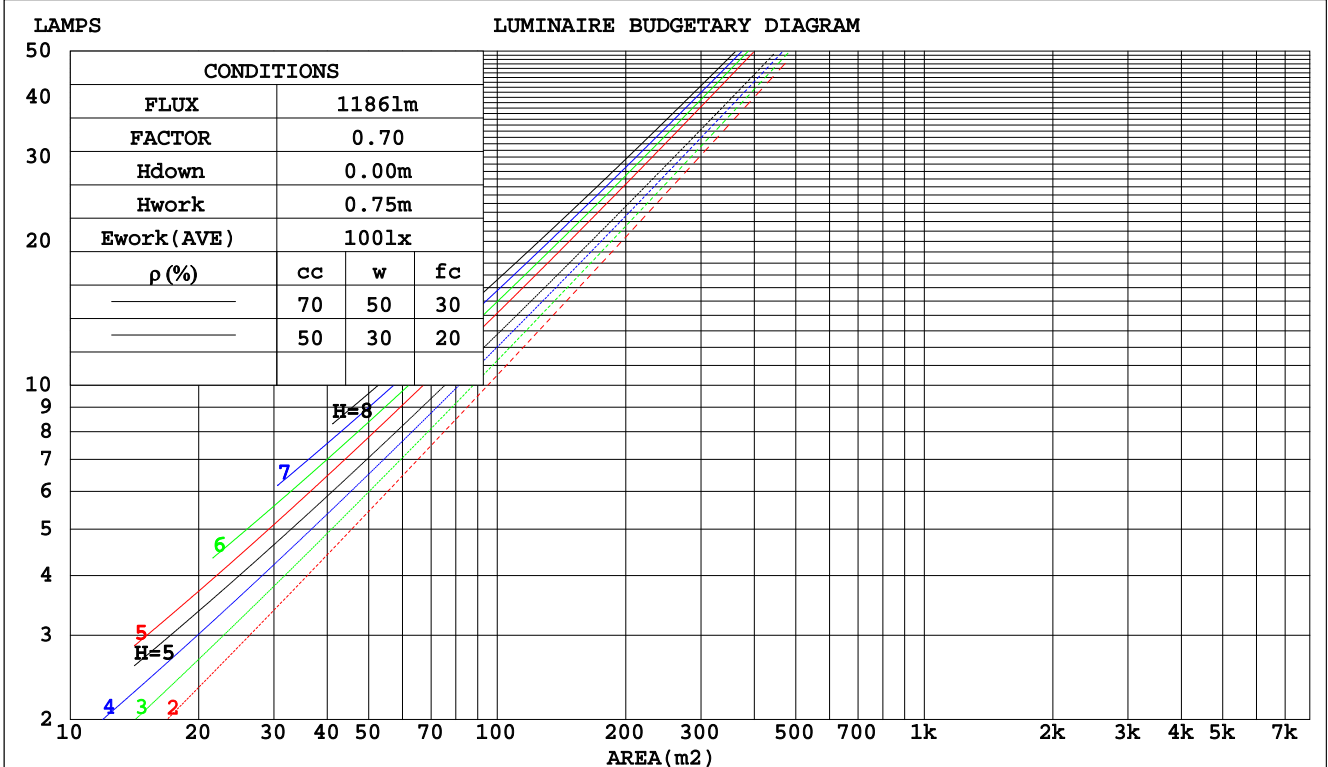

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz		
Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.157	.090	.028	.151	.086	.027	.138	.079	.025	.127	.073	.023	.116	.067	.022	
2.0	.148	.081	.025	.143	.079	.024	.133	.074	.023	.123	.069	.022	.114	.065	.020	
3.0	.140	.075	.022	.136	.073	.022	.127	.069	.021	.119	.065	.020	.111	.062	.019	
4.0	.133	.069	.020	.129	.068	.020	.122	.065	.019	.115	.062	.019	.108	.059	.018	
5.0	.127	.065	.019	.123	.063	.018	.117	.061	.018	.111	.059	.017	.105	.056	.017	
6.0	.121	.061	.017	.118	.060	.017	.113	.058	.017	.107	.056	.016	.102	.054	.016	
7.0	.116	.057	.016	.113	.057	.016	.108	.055	.016	.104	.053	.015	.099	.052	.015	
8.0	.111	.054	.015	.109	.054	.015	.105	.052	.015	.100	.051	.015	.097	.050	.014	
9.0	.107	.052	.014	.105	.051	.014	.101	.050	.014	.097	.049	.014	.094	.048	.014	
10.0	.103	.049	.014	.101	.049	.014	.098	.048	.013	.094	.047	.013	.091	.046	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.115	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.140	.113	.093	.120	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011	
4.0	.128	.098	.076	.110	.085	.066	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.119	.086	.063	.102	.075	.054	.070	.052	.038	.041	.031	.023	.013	.010	.008	
6.0	.111	.077	.052	.095	.067	.046	.066	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.104	.069	.044	.090	.060	.039	.062	.042	.027	.036	.025	.016	.012	.008	.005	
8.0	.098	.063	.038	.085	.054	.033	.059	.038	.024	.034	.023	.014	.011	.007	.005	
9.0	.093	.057	.033	.080	.050	.029	.056	.035	.020	.032	.021	.012	.010	.007	.004	
10.0	.089	.053	.029	.076	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.9	8.7	8.1	8.9	9.1	6.4	7.2	6.6	7.4	7.5
3H	7.8	8.5	8.0	8.7	8.9	6.2	7.0	6.5	7.2	7.4
4H	7.7	8.4	8.0	8.6	8.8	6.1	6.9	6.4	7.1	7.3
6H	7.6	8.3	7.9	8.5	8.7	6.1	6.7	6.4	7.0	7.2
8H	7.6	8.2	7.9	8.4	8.7	6.0	6.7	6.3	6.9	7.2
12H	7.5	8.1	7.8	8.4	8.7	6.0	6.6	6.3	6.8	7.1
4H 2H	7.7	8.4	8.0	8.6	8.8	6.1	6.9	6.4	7.1	7.3
3H	7.5	8.1	7.8	8.4	8.7	6.0	6.6	6.3	6.8	7.1
4H	7.4	8.0	7.8	8.3	8.6	5.9	6.4	6.2	6.7	7.0
6H	7.3	7.8	7.7	8.1	8.5	5.8	6.3	6.2	6.6	6.9
8H	7.3	7.7	7.7	8.1	8.4	5.7	6.2	6.1	6.5	6.9
12H	7.2	7.6	7.6	8.0	8.4	5.7	6.1	6.1	6.5	6.8
8H 4H	7.3	7.7	7.7	8.1	8.4	5.7	6.2	6.1	6.5	6.9
6H	7.2	7.5	7.6	7.9	8.3	5.6	6.0	6.0	6.4	6.8
8H	7.1	7.4	7.5	7.8	8.3	5.6	5.9	6.0	6.3	6.7
12H	7.0	7.3	7.5	7.8	8.2	5.5	5.8	6.0	6.2	6.7
12H 4H	7.2	7.6	7.6	8.0	8.4	5.7	6.1	6.1	6.5	6.8
6H	7.1	7.4	7.5	7.8	8.3	5.6	5.9	6.0	6.3	6.7
8H	7.0	7.3	7.5	7.8	8.2	5.5	5.8	6.0	6.2	6.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.3 / -21.0					+ 3.9 / -20.5				
1.5H	+ 7.0 / -18.9					+ 6.5 / -17.2				
2.0H	+ 8.0 / -14.3					+ 7.7 / -11.4				

CIE Pub.117, 1187 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.6)
Area: 0.0206015 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	82	91	85	82	90	85	82	79
0.80	98	93	90	97	93	89	96	92	89	86
1.00	102	97	94	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

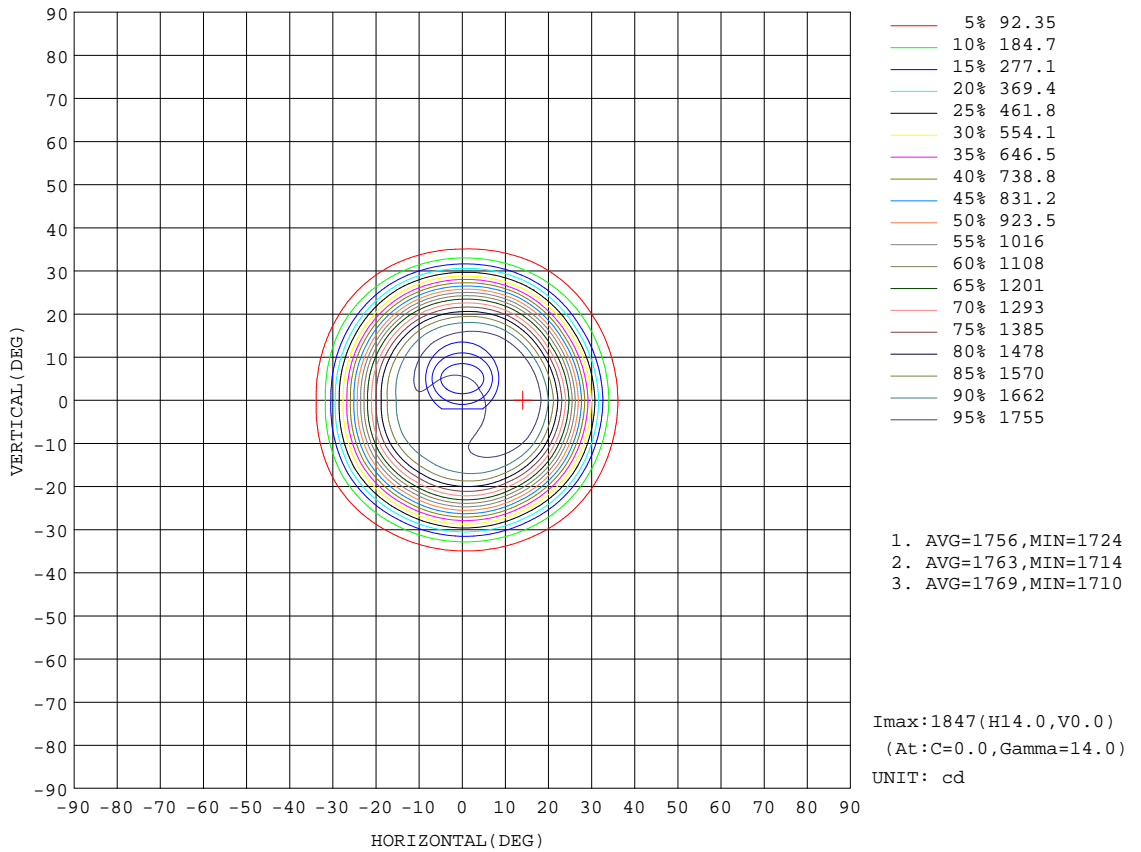


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

AAI Figure

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:1001 lm

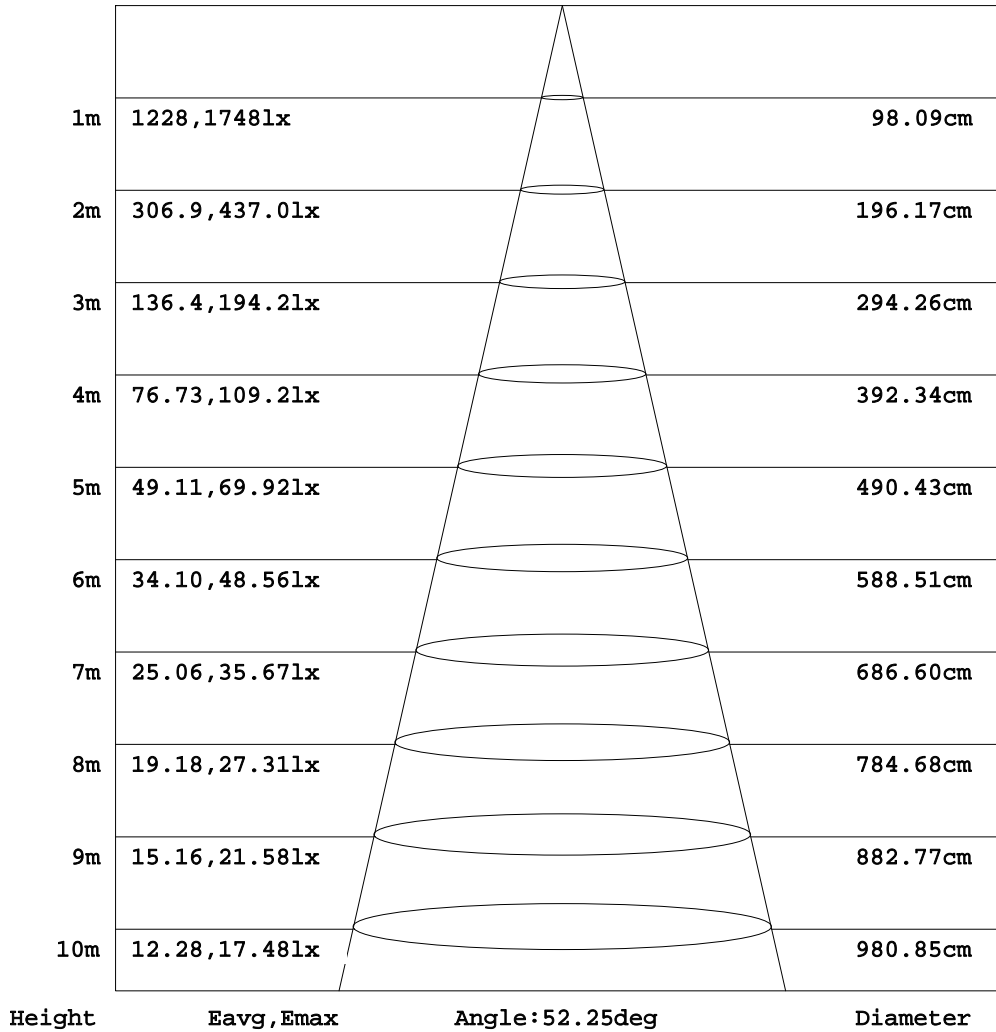


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

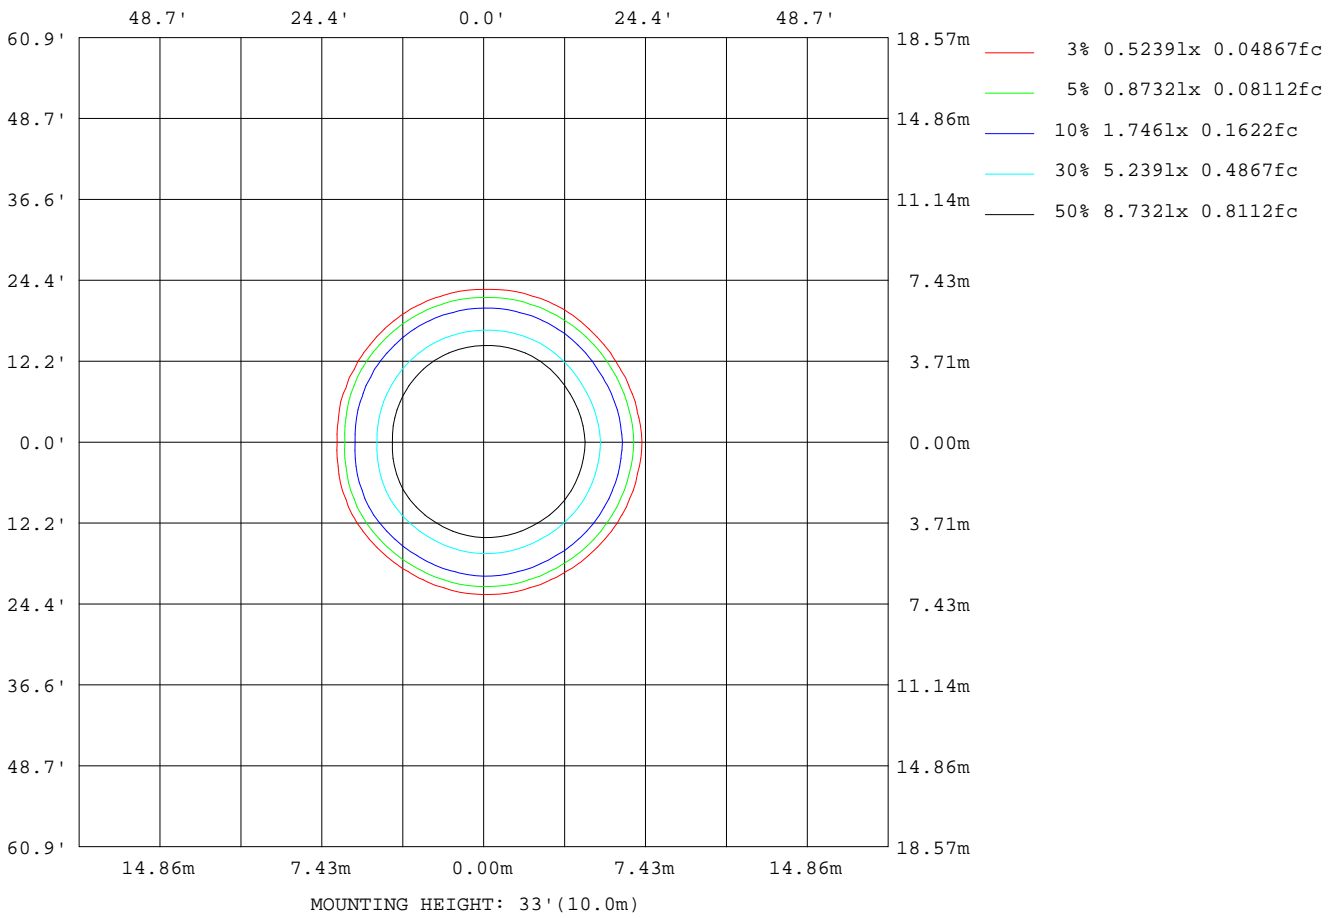

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz		
Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	14
L_0~180 (75) av	11
L_0~180 (85) av	34
L_90~270 (65) av	12
L_90~270 (75) av	10
L_90~270 (85) av	27
L_45 (65) av	12
L_45 (75) av	10
L_45 (85) av	26

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

Planar Illuminance Curve

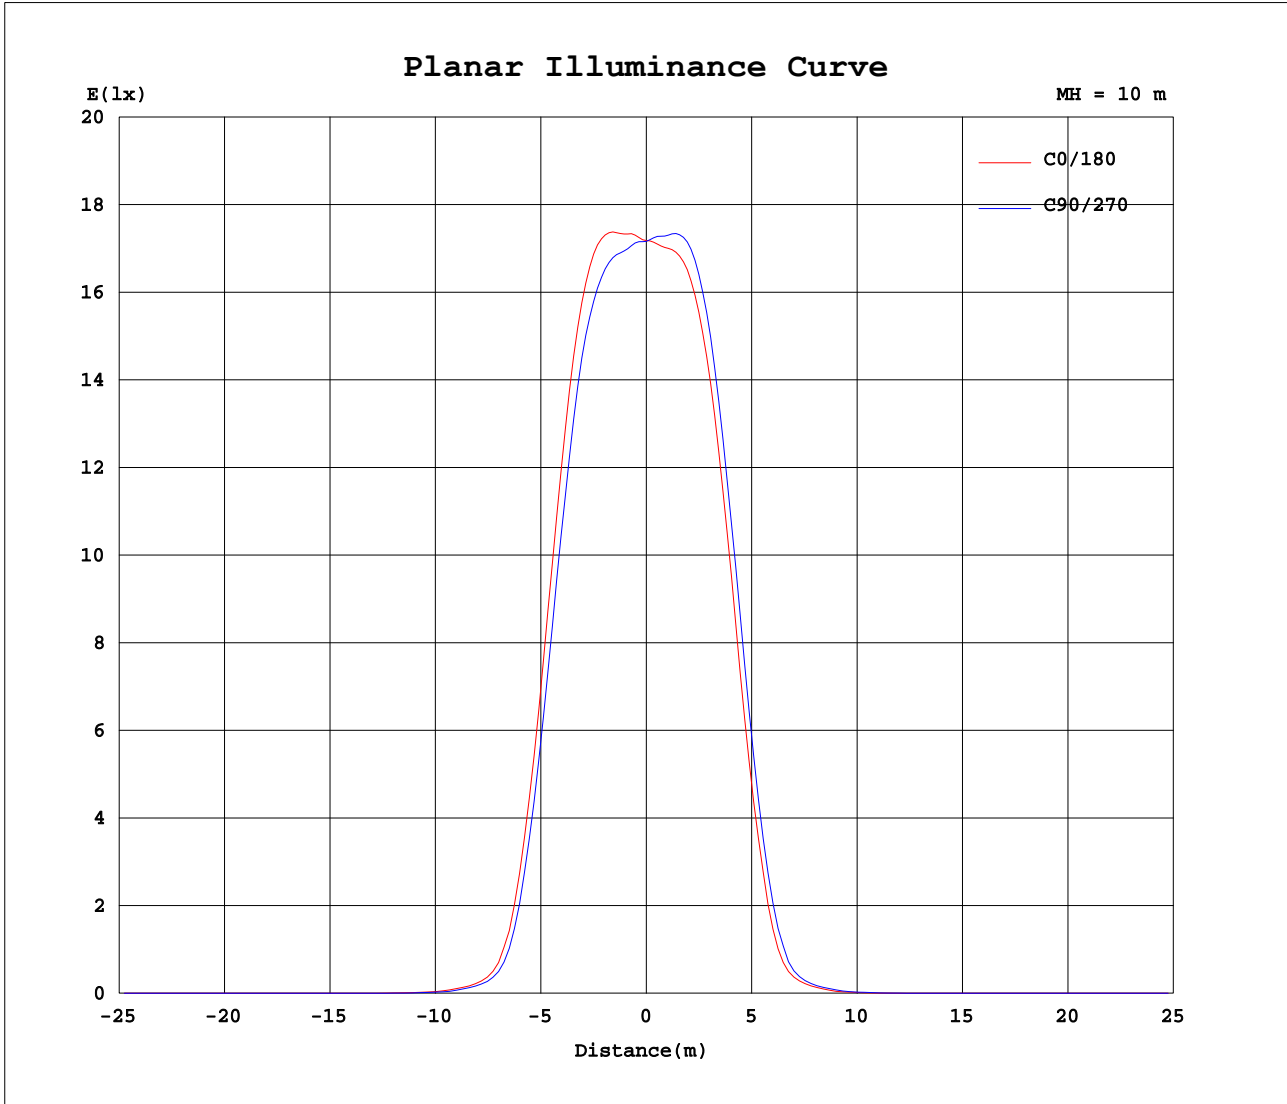

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:20.800V I:0.6990A P:14.539W PF:1.0000 Freq:0Hz		
Lamp Flux:1186.62x1 lm		
NAME: XDL E6-WRA-L2X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330								
0	1718	1717	1717	1716	1715	1715	1718	1717	1717	1716	1715	1715								
5	1753	1745	1734	1719	1711	1710	1722	1732	1740	1748	1753	1758								
10	1818	1799	1772	1746	1730	1731	1748	1767	1787	1807	1817	1826								
15	1840	1808	1756	1713	1691	1688	1673	1710	1752	1776	1811	1829								
20	1659	1619	1530	1477	1435	1433	1380	1432	1495	1524	1583	1606								
25	1172	1127	1025	985	926	920	844	892	971	1010	1082	1090								
30	549	515	438	426	376	387	314	352	409	424	470	465								
35	128	115	97.3	90.7	80.0	80.6	67.2	74.7	88.1	93.6	106	105								
40	38.1	35.4	31.2	29.1	26.1	26.1	22.6	24.6	28.4	30.4	34.0	33.6								
45	10.7	10.4	8.68	7.71	6.57	6.34	5.36	5.99	7.00	8.11	9.27	9.37								
50	2.80	2.48	2.01	1.62	1.14	1.11	0.94	1.01	1.43	1.98	2.14	2.14								
55	0.80	0.68	0.67	0.56	0.57	0.50	0.46	0.54	0.58	0.71	0.63	0.70								
60	0.37	0.26	0.29	0.19	0.22	0.18	0.18	0.31	0.22	0.34	0.26	0.33								
65	0.16	0.07	0.10	0.05	0.10	0.05	0.09	0.22	0.08	0.17	0.10	0.16								
70	0.10	0.04	0.08	0.05	0.07	0.04	0.06	0.14	0.05	0.10	0.06	0.10								
75	0.05	0.04	0.05	0.05	0.05	0.04	0.07	0.09	0.05	0.05	0.05	0.05								
80	0.05	0.04	0.05	0.05	0.05	0.04	0.07	0.06	0.05	0.05	0.05	0.05								
85	0.05	0.04	0.05	0.05	0.05	0.04	0.07	0.05	0.05	0.05	0.05	0.05								
90	0.05	0.04	0.05	0.05	0.05	0.04	0.07	0.05	0.05	0.05	0.05	0.05								

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks: