
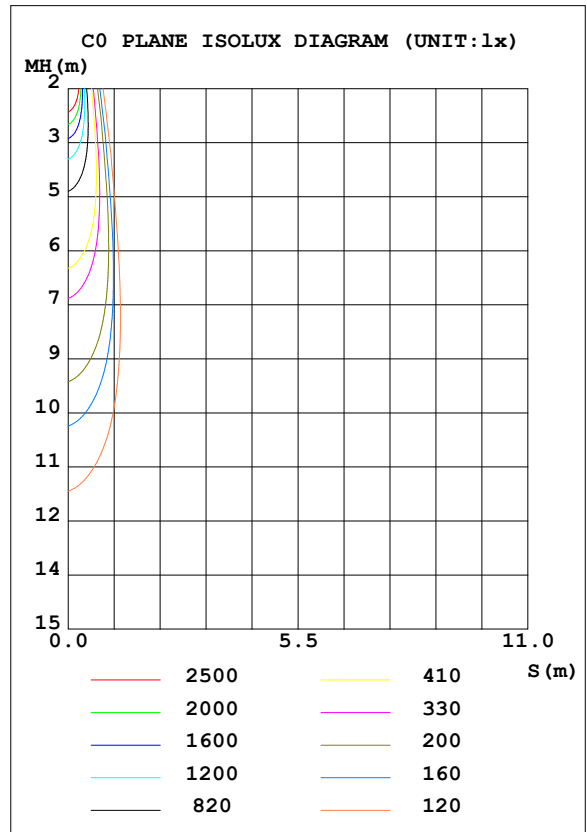


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 96.32 lm/W			
MODEL	XOB CRI 90 3000K	I _{max} (cd)	16482	S/MH (C0/180)	0.35
NOMINAL POWER (W)	24	LOR (%)	100.0	S/MH (C90/270)	0.31
RATED VOLTAGE (V)	37	TOTAL FLUX (lm)	2309.4	η UP, DN (C0-180)	0.0, 50.6
NOMINAL FLUX (lm)	2309.36	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	34.3	η down (%)	100.0	CIBSE SHR MAX	0.30

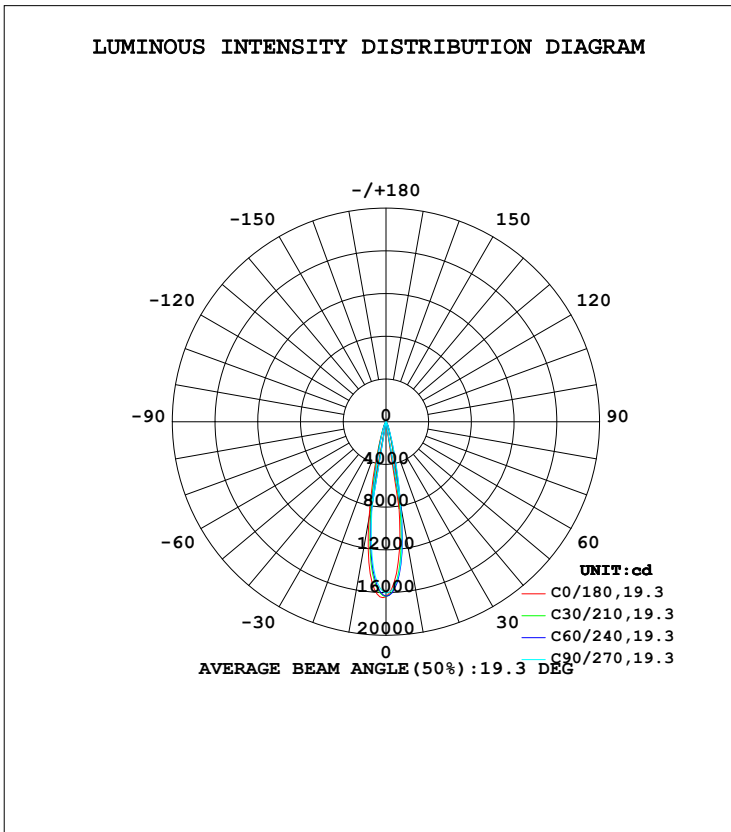

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	627.9	763.6	790.3	862.7	916.3	768.6	709.8	652.3	0- 10	1128	1128	48.9,48.9
20	86.45	96.07	110.2	105.3	116.2	101.7	92.95	98.52	10- 20	817.5	1946	84.3,84.3
30	24.70	27.32	28.49	29.01	30.54	26.92	25.17	25.28	20- 30	243.6	2189	94.8,94.8
40	6.554	7.280	7.829	8.243	8.187	7.210	6.974	6.437	30- 40	97.71	2287	99,99
50	0.3238	0.3727	0.4250	0.4818	0.4561	0.4043	0.3313	0.2802	40- 50	20.37	2307	99.9,99.9
60	0.0610	0.0646	0.0600	0.0626	0.0558	0.0591	0.0547	0.0477	50- 60	1.463	2309	100,100
70	0.0187	0.0159	0.0090	0.0118	0.0069	0.0114	0.0125	0.0100	60- 70	0.2464	2309	100,100
80	0.0097	0.0090	0.0090	0.0093	0.0069	0.0076	0.0083	0.0079	70- 80	0.0959	2309	100,100
90	0.0097	0.0090	0.0090	0.0093	0.0069	0.0076	0.0076	0.0076	80- 90	0.0911	2309	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 2303.4 lm

%lum = 99.7%
 %lamp = 99.7%

Conical surface Flux(120deg): 2308.9 lm

%lum = 100.0%
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:2303.4 %lum: 99.7%
 135 - 180 DEG Zonal Flux:0 %lum: 0.0%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 4.1%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 6.3%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

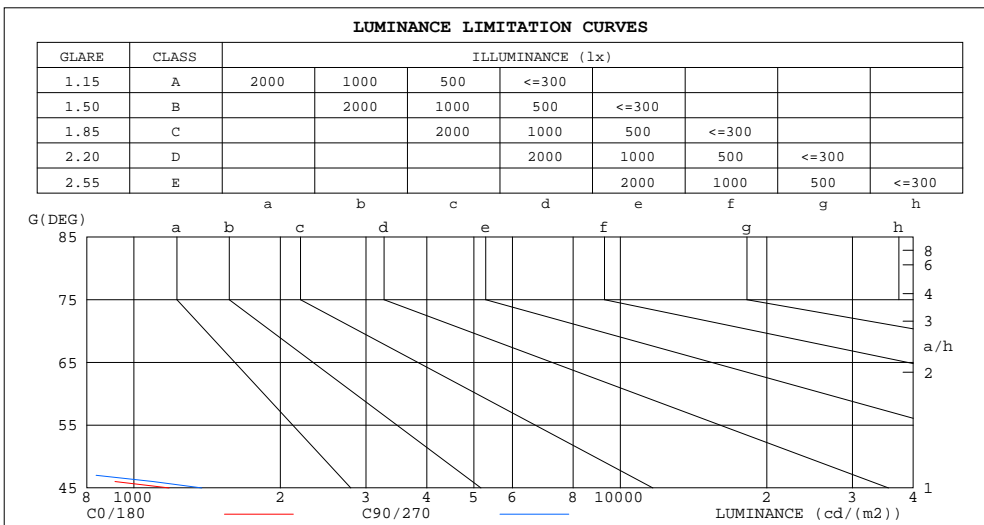

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	54	50
80	27	25
75	18	17
70	27	13
65	33	20
60	59	58
55	131	140
50	245	321
45	1181	1379


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.12	1.10	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.00	.00	.99	.97
2.0	1.09	1.06	1.04	1.07	1.05	1.02	1.04	1.02	1.00	1.01	.00	.98	.98	.97	.96	.95
3.0	1.05	1.01	.99	1.03	1.00	.98	1.01	.98	.96	.99	.97	.95	.97	.95	.94	.92
4.0	1.01	.97	.95	.00	.97	.94	.98	.95	.93	.96	.94	.92	.95	.93	.91	.90
5.0	.98	.94	.91	.97	.94	.91	.95	.93	.90	.94	.92	.90	.93	.91	.89	.88
6.0	.95	.91	.89	.94	.91	.88	.93	.90	.88	.92	.89	.87	.91	.89	.87	.86
7.0	.93	.89	.86	.92	.88	.86	.91	.88	.86	.90	.87	.85	.89	.87	.85	.84
8.0	.90	.87	.84	.90	.86	.84	.89	.86	.84	.88	.85	.83	.87	.85	.83	.82
9.0	.88	.85	.82	.88	.84	.82	.87	.84	.82	.86	.83	.81	.86	.83	.81	.80
10.0	.86	.83	.80	.86	.82	.80	.85	.82	.80	.85	.82	.80	.84	.81	.80	.79

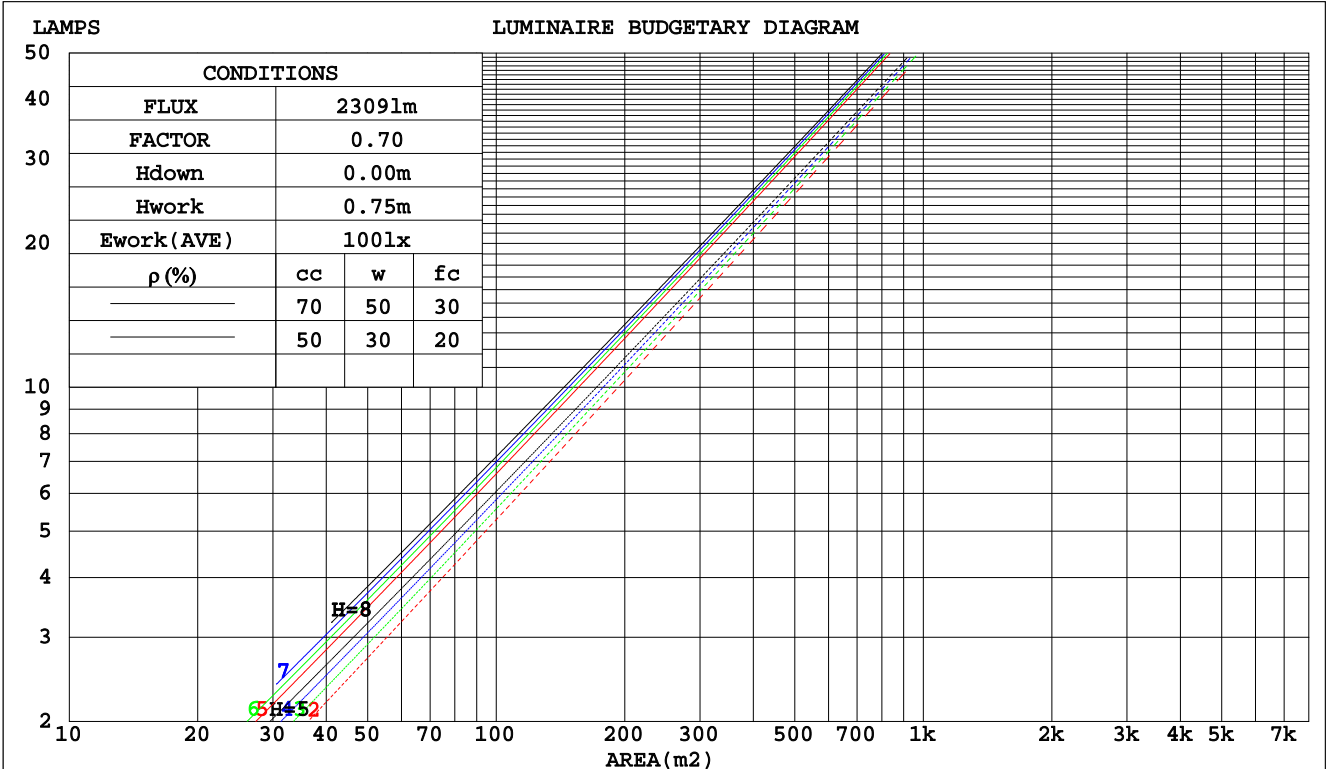

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz		
Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.127	.072	.023	.121	.069	.022	.108	.062	.020	.097	.056	.018	.086	.050	.016	
2.0	.117	.064	.020	.112	.062	.019	.102	.056	.018	.092	.052	.016	.084	.047	.015	
3.0	.108	.058	.017	.104	.056	.017	.096	.052	.016	.088	.048	.015	.081	.045	.014	
4.0	.101	.053	.015	.097	.051	.015	.090	.048	.014	.084	.045	.014	.078	.042	.013	
5.0	.095	.048	.014	.092	.047	.014	.086	.045	.013	.080	.042	.013	.075	.040	.012	
6.0	.089	.045	.013	.087	.044	.013	.082	.042	.012	.077	.040	.012	.072	.038	.011	
7.0	.084	.042	.012	.082	.041	.012	.078	.039	.011	.074	.038	.011	.070	.036	.011	
8.0	.080	.039	.011	.078	.039	.011	.074	.037	.011	.071	.036	.010	.067	.035	.010	
9.0	.076	.037	.010	.075	.036	.010	.071	.035	.010	.068	.034	.010	.065	.033	.010	
10.0	.073	.035	.010	.071	.034	.010	.068	.034	.009	.066	.033	.009	.063	.032	.009	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.149	.143	.135	.128	.098	.093	.089	.056	.054	.052	.018	.017	.017	
2.0	.149	.133	.119	.128	.114	.103	.087	.079	.072	.050	.046	.042	.016	.015	.014	
3.0	.133	.113	.097	.114	.098	.084	.078	.068	.059	.045	.040	.035	.015	.013	.011	
4.0	.120	.098	.080	.103	.084	.070	.071	.059	.049	.041	.034	.029	.013	.011	.010	
5.0	.109	.085	.067	.094	.074	.059	.065	.051	.041	.037	.030	.025	.012	.010	.008	
6.0	.100	.075	.057	.086	.065	.050	.059	.045	.035	.034	.027	.021	.011	.009	.007	
7.0	.092	.067	.049	.079	.058	.043	.055	.041	.030	.032	.024	.018	.010	.008	.006	
8.0	.085	.060	.042	.074	.052	.037	.051	.036	.026	.030	.021	.016	.010	.007	.005	
9.0	.080	.054	.037	.069	.047	.032	.048	.033	.023	.028	.019	.014	.009	.006	.004	
10.0	.075	.049	.032	.064	.043	.028	.045	.030	.020	.026	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz		
Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2.2	2.8	2.4	3.0	3.1	2.9	3.5	3.1	3.6	3.8
3H	2.1	2.6	2.3	2.8	3.0	2.8	3.3	3.0	3.5	3.7
4H	2.0	2.5	2.3	2.7	3.0	2.7	3.2	3.0	3.4	3.6
6H	1.9	2.4	2.2	2.7	2.9	2.6	3.1	2.9	3.3	3.6
8H	1.9	2.4	2.2	2.6	2.9	2.6	3.1	2.9	3.3	3.5
12H	1.9	2.3	2.2	2.6	2.8	2.5	3.0	2.8	3.2	3.5
4H 2H	2.0	2.5	2.3	2.8	3.0	2.7	3.2	3.0	3.4	3.6
3H	1.9	2.3	2.2	2.6	2.8	2.5	3.0	2.8	3.2	3.5
4H	1.8	2.2	2.1	2.5	2.8	2.4	2.9	2.8	3.1	3.4
6H	1.7	2.0	2.0	2.4	2.7	2.3	2.7	2.7	3.0	3.4
8H	1.6	2.0	2.0	2.3	2.7	2.3	2.6	2.7	3.0	3.3
12H	1.5	1.9	1.9	2.2	2.6	2.2	2.5	2.6	2.9	3.3
8H 4H	1.6	2.0	2.0	2.3	2.7	2.3	2.6	2.7	3.0	3.3
6H	1.5	1.8	1.9	2.2	2.6	2.2	2.5	2.6	2.8	3.2
8H	1.4	1.7	1.9	2.1	2.5	2.1	2.4	2.5	2.8	3.2
12H	1.4	1.6	1.8	2.0	2.5	2.0	2.3	2.5	2.7	3.2
12H 4H	1.5	1.9	1.9	2.2	2.6	2.2	2.5	2.6	2.9	3.3
6H	1.4	1.7	1.9	2.1	2.5	2.1	2.4	2.5	2.8	3.2
8H	1.4	1.6	1.8	2.0	2.5	2.0	2.3	2.5	2.7	3.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.1 / -20.1					+ 3.5 / -20.5				
1.5H	+ 5.8 / -16.8					+ 6.2 / -17.2				
2.0H	+ 7.9 / -12.4					+ 8.3 / -11.9				

CIE Pub.117, 2309 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.9)
 Area: 0.0206015 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	82	90	85	82	90	85	82	78
0.80	98	93	89	97	92	89	96	92	89	86
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	93
1.50	108	103	101	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

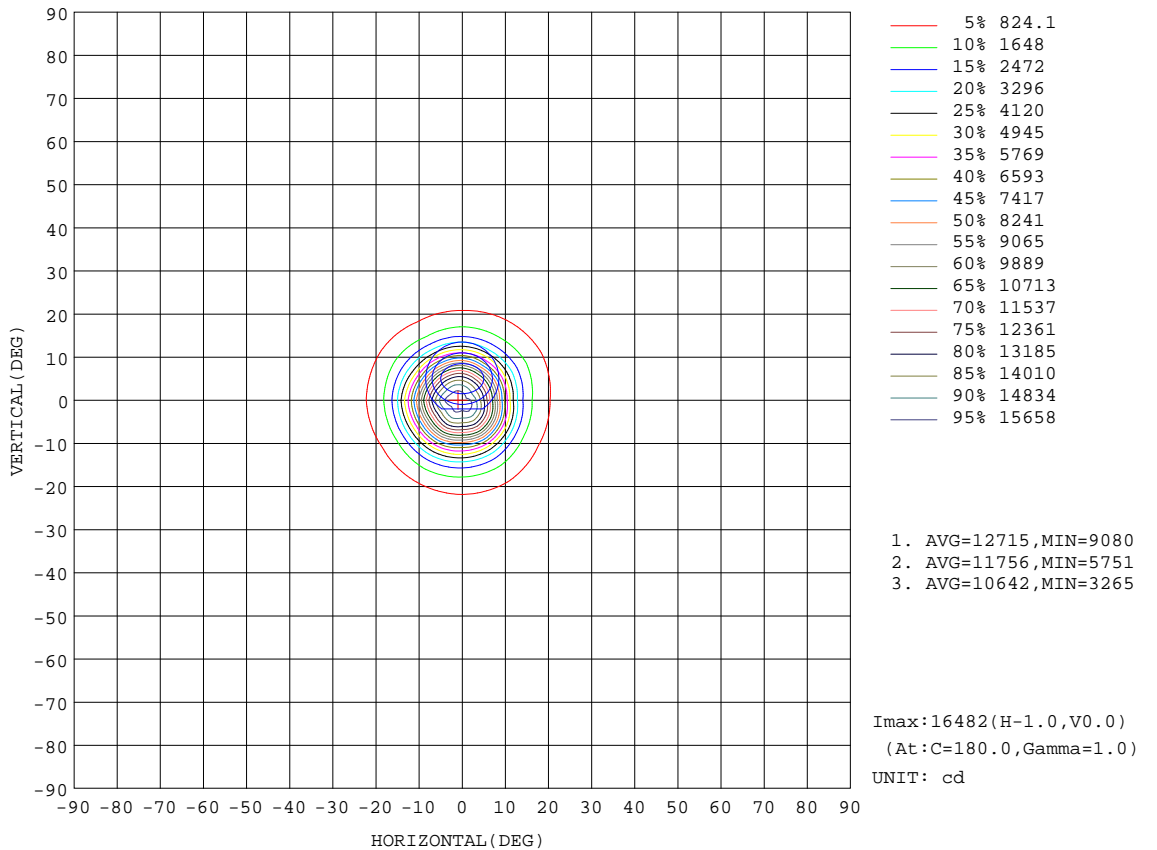


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-10-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

AAI Figure

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:1128 lm

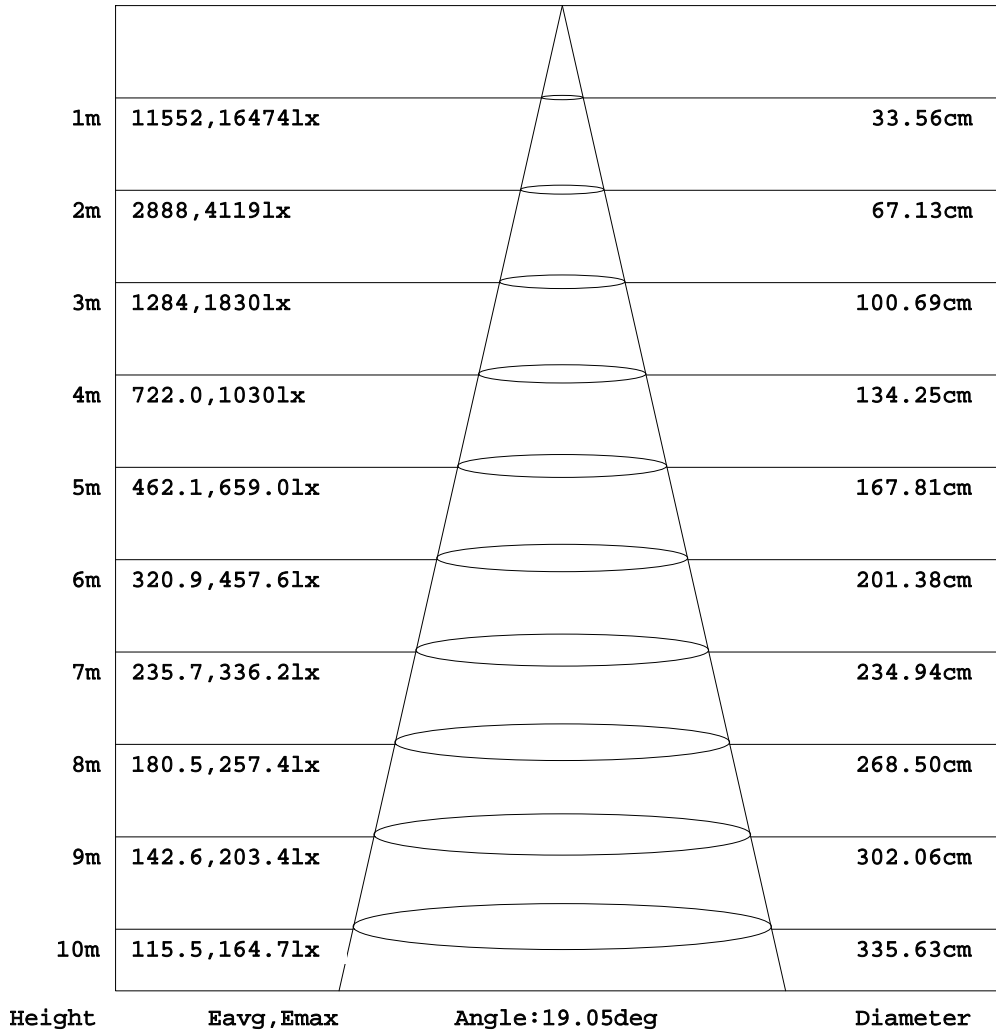


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-10-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

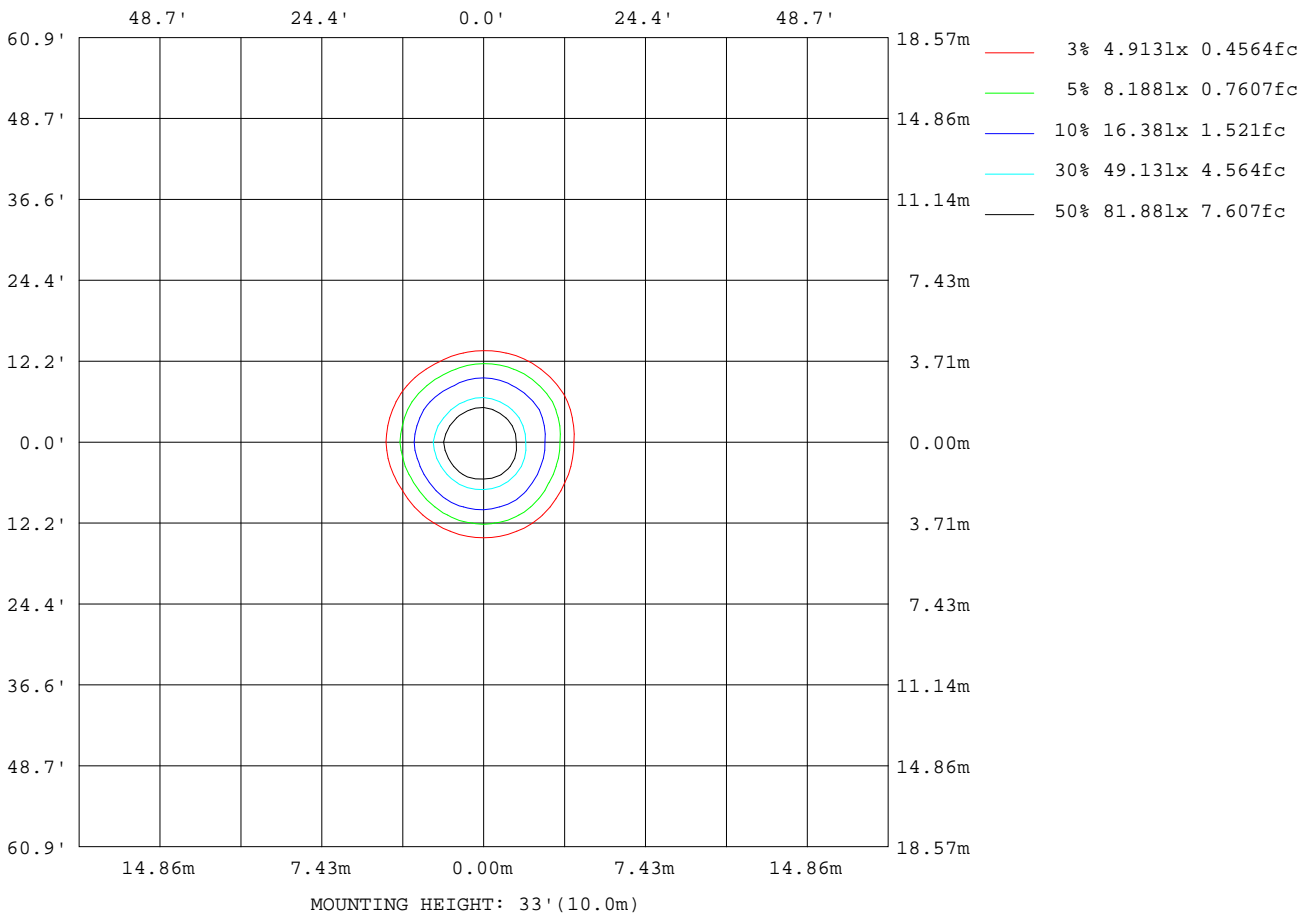

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz		
Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	23
L_0~180 (75) av	16
L_0~180 (85) av	46
L_90~270 (65) av	22
L_90~270 (75) av	16
L_90~270 (85) av	46
L_45 (65) av	23
L_45 (75) av	16
L_45 (85) av	46

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

Planar Illuminance Curve

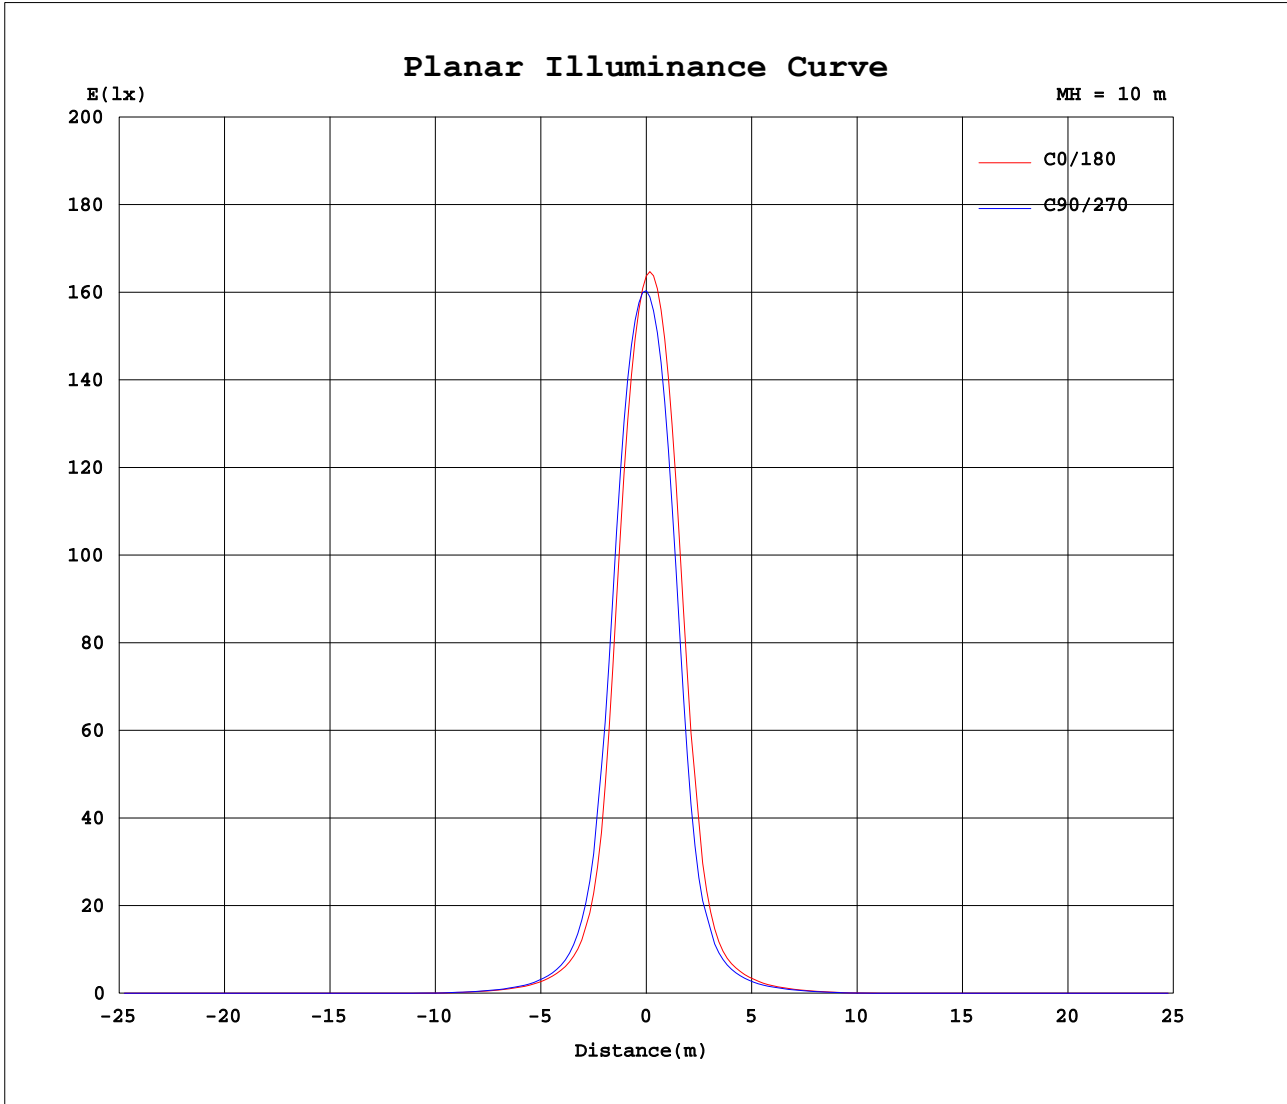

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-10-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:34.300V I:0.6990A P:23.976W PF:1.0000 Freq:0Hz Lamp Flux:2309.36x1 lm		
NAME: XDL E6-WRA-L39030-20DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: x10cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1638	1636	1633	1604	1605	1587	1638	1636	1633	1604	1605	1587							
5	1323	1396	1436	1419	1468	1453	1510	1433	1398	1365	1319	1305							
10	628	729	799	790	864	861	916	803	734	710	649	655							
15	204	224	269	284	304	307	330	285	243	235	229	232							
20	86.4	87.9	104	110	107	103	116	110	93.3	92.9	97.6	99.5							
25	45.3	47.4	52.5	53.6	52.8	53.1	57.8	54.6	47.5	46.6	47.7	49.5							
30	24.7	26.2	28.5	28.5	28.8	29.2	30.5	28.5	25.4	25.2	24.7	25.8							
35	13.8	14.5	15.4	15.9	16.0	16.4	16.7	15.5	14.2	14.2	14.1	14.3							
40	6.55	7.16	7.40	7.83	8.00	8.49	8.19	7.46	6.96	6.97	6.61	6.26							
45	1.72	1.86	1.89	2.01	2.10	2.34	2.19	2.02	1.96	1.78	1.71	1.54							
50	0.32	0.37	0.37	0.43	0.44	0.52	0.46	0.41	0.40	0.33	0.29	0.27							
55	0.16	0.16	0.17	0.17	0.16	0.17	0.16	0.16	0.15	0.14	0.14	0.14							
60	0.06	0.06	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.05							
65	0.03	0.02	0.03	0.02	0.02	0.02	0.01	0.02	0.02	0.02	0.01	0.02							
70	0.02	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
80	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
85	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 30.0DEG	γ Interval: 1.0DEG
Test Speed: MEDIUM	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Temperature:25.3DEG	Humidity:58%
Operators:Jasoan	Test Distance:9.322m [K=1.0000]
Test Date:2024-10-12	Remarks: