
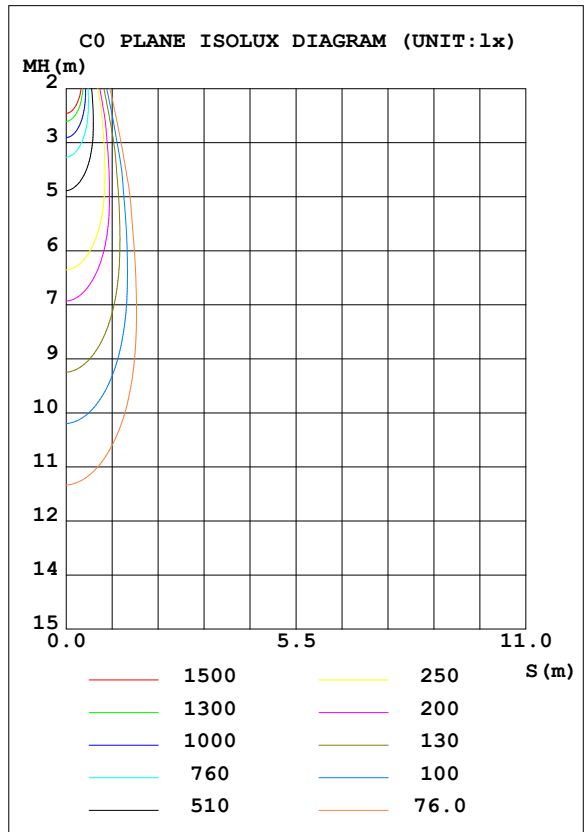


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L2X9030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.29 lm/W			
MODEL	XICATO-3000K	I _{max} (cd)	10115	S/MH (C0/180)	0.41
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	0.40
RATED VOLTAGE (V)	30	TOTAL FLUX (lm)	2195.9	η UP, DN (C0-180)	0.0, 50.7
NOMINAL FLUX (lm)	2195.93	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	26.4	η down (%)	100.0	CIBSE SHR MAX	0.30

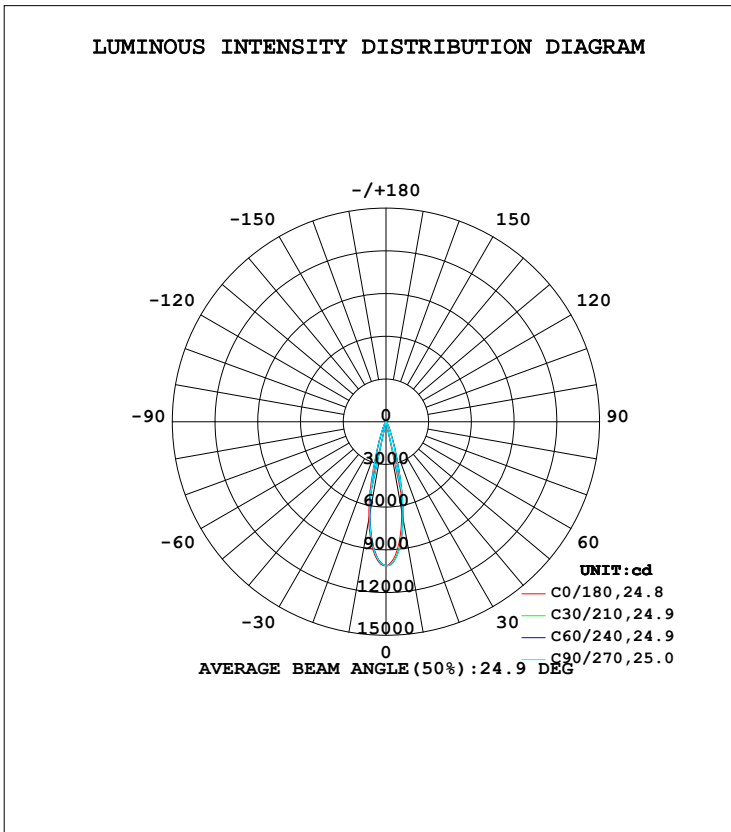

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	639.4	689.5	690.0	686.4	696.4	653.8	661.8	658.3	0- 10	799.5	799.5	36.4,36.4
20	138.7	151.7	138.8	135.6	138.5	125.6	136.4	144.7	10- 20	949.4	1749	79.6,79.6
30	33.31	35.31	33.46	32.55	32.07	29.95	31.57	33.61	20- 30	304.3	2053	93.5,93.5
40	8.316	8.296	7.840	8.334	9.057	8.776	9.070	8.896	30- 40	116.7	2170	98.8,98.8
50	0.4908	0.4242	0.3485	0.4050	0.4741	0.5207	0.5655	0.5116	40- 50	23.95	2194	99.9,99.9
60	0.0770	0.0666	0.0522	0.0564	0.0603	0.0649	0.0742	0.0748	50- 60	1.609	2195	100,100
70	0.0225	0.0143	0.0088	0.0105	0.0082	0.0126	0.0150	0.0150	60- 70	0.2777	2196	100,100
80	0.0095	0.0085	0.0088	0.0085	0.0082	0.0085	0.0088	0.0082	70- 80	0.0986	2196	100,100
90	0.0088	0.0085	0.0088	0.0088	0.0082	0.0082	0.0088	0.0082	80- 90	0.0931	2196	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 2189.1 lm

%lum = 99.7%
 %lamp = 99.7%

Conical surface Flux(120deg): 2195.5 lm

%lum = 100.0%
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:2189.1 %lum: 99.7%
 135 - 180 DEG Zonal Flux:0 %lum: 0.0%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 4.4%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 6.9%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-I4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

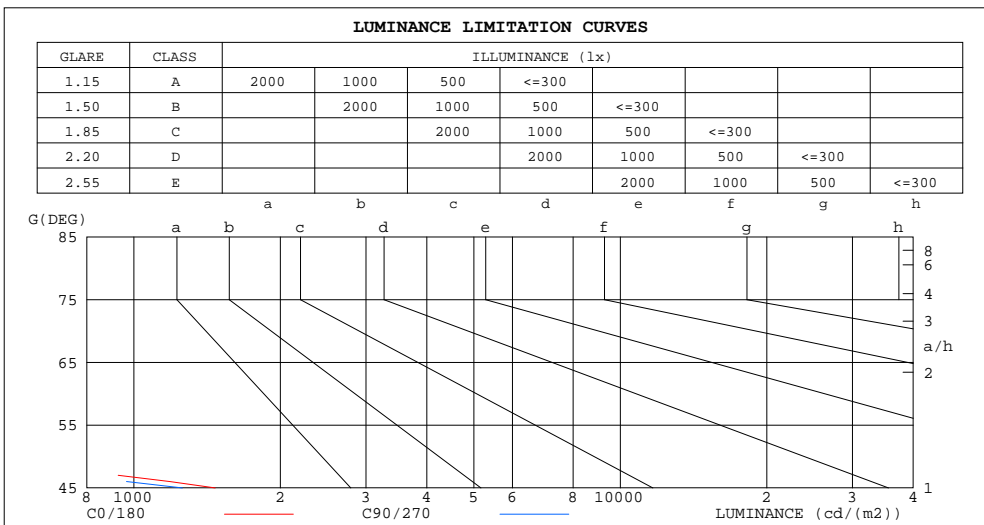

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	53	49
80	27	25
75	18	17
70	32	13
65	37	18
60	75	51
55	155	130
50	371	263
45	1469	1258


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.11	1.09	1.08	1.07	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	1.00	.98	.97	.97	.96	.95	.93
3.0	1.03	.00	.97	1.02	.99	.96	.99	.97	.94	.97	.95	.93	.95	.93	.92	.90
4.0	.99	.95	.92	.98	.94	.92	.96	.93	.91	.94	.92	.90	.93	.90	.89	.87
5.0	.95	.91	.88	.95	.91	.88	.93	.90	.87	.92	.89	.87	.90	.88	.86	.85
6.0	.92	.88	.85	.91	.88	.85	.90	.87	.84	.89	.86	.84	.88	.85	.83	.82
7.0	.89	.85	.82	.89	.85	.82	.88	.84	.82	.87	.83	.81	.86	.83	.81	.80
8.0	.86	.82	.80	.86	.82	.79	.85	.82	.79	.84	.81	.79	.83	.81	.79	.78
9.0	.84	.80	.77	.84	.80	.77	.83	.79	.77	.82	.79	.77	.81	.79	.76	.75
10.0	.82	.78	.75	.81	.78	.75	.81	.77	.75	.80	.77	.75	.79	.77	.74	.74

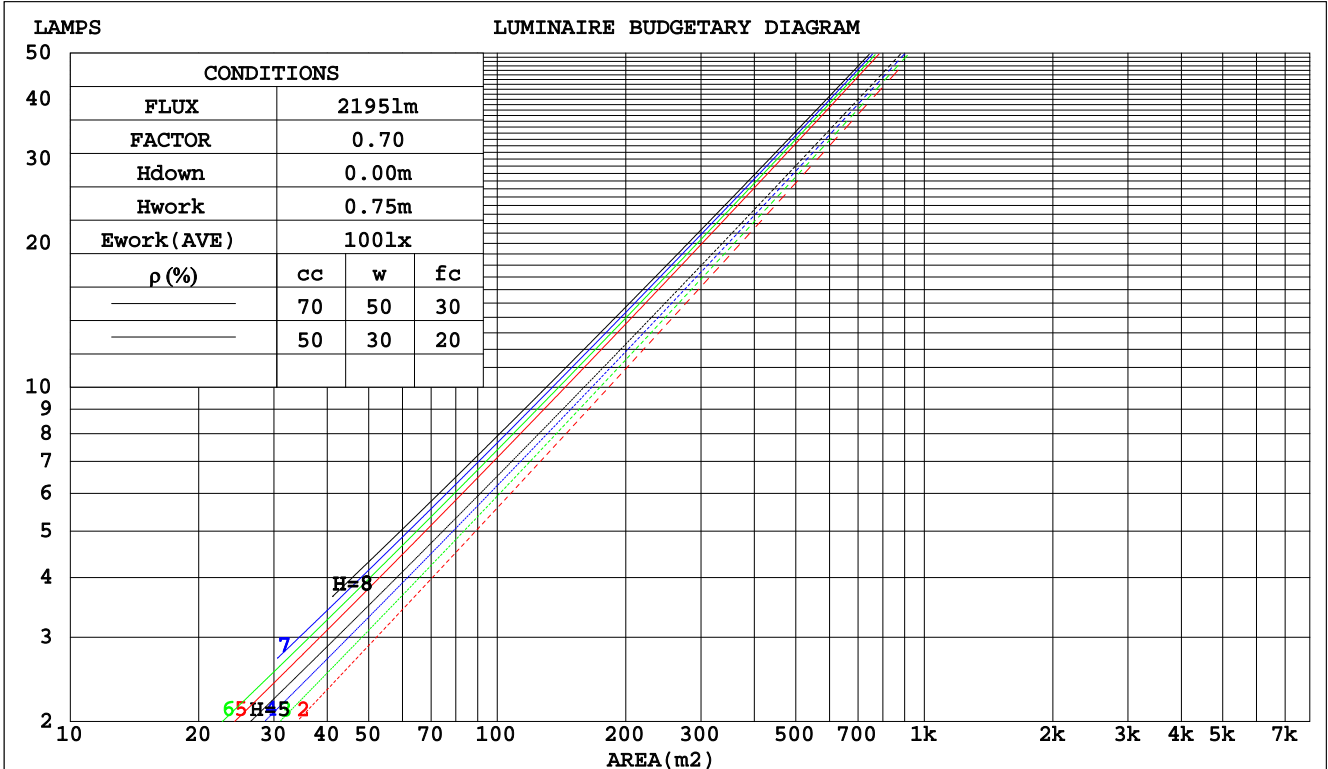

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz		
Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.136	.077	.025	.130	.074	.023	.117	.067	.021	.106	.061	.020	.095	.055	.018	
2.0	.126	.069	.021	.121	.067	.021	.111	.062	.019	.101	.057	.018	.093	.052	.017	
3.0	.118	.063	.019	.113	.061	.018	.105	.057	.017	.097	.053	.016	.090	.050	.015	
4.0	.110	.057	.017	.107	.056	.017	.100	.053	.016	.093	.050	.015	.087	.047	.014	
5.0	.104	.053	.015	.101	.052	.015	.095	.049	.015	.089	.047	.014	.084	.045	.013	
6.0	.099	.049	.014	.096	.048	.014	.091	.046	.014	.086	.044	.013	.081	.043	.013	
7.0	.094	.046	.013	.091	.045	.013	.087	.044	.013	.082	.042	.012	.078	.041	.012	
8.0	.089	.044	.012	.087	.043	.012	.083	.042	.012	.079	.040	.012	.076	.039	.011	
9.0	.085	.041	.012	.084	.041	.011	.080	.040	.011	.077	.038	.011	.073	.037	.011	
10.0	.082	.039	.011	.080	.039	.011	.077	.038	.011	.074	.037	.010	.071	.036	.010	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.148	.144	.135	.127	.098	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.150	.133	.118	.129	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014	
3.0	.135	.113	.096	.116	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.123	.098	.079	.105	.085	.069	.072	.059	.048	.042	.035	.029	.013	.011	.009	
5.0	.112	.086	.066	.096	.074	.057	.066	.052	.041	.038	.030	.024	.012	.010	.008	
6.0	.103	.076	.056	.089	.065	.049	.061	.046	.034	.036	.027	.020	.011	.009	.007	
7.0	.096	.067	.048	.082	.058	.041	.057	.041	.029	.033	.024	.017	.011	.008	.006	
8.0	.089	.061	.041	.077	.053	.036	.053	.037	.025	.031	.022	.015	.010	.007	.005	
9.0	.084	.055	.036	.072	.048	.031	.050	.034	.022	.029	.020	.013	.009	.007	.004	
10.0	.079	.050	.031	.068	.044	.027	.047	.031	.019	.027	.018	.012	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.0	7.7	7.2	7.8	8.0	6.8	7.4	7.0	7.6	7.7
3H	6.9	7.5	7.1	7.6	7.8	6.6	7.2	6.9	7.4	7.6
4H	6.8	7.4	7.0	7.6	7.8	6.6	7.1	6.8	7.3	7.5
6H	6.7	7.2	7.0	7.5	7.7	6.5	7.0	6.7	7.2	7.5
8H	6.6	7.2	6.9	7.4	7.7	6.4	7.0	6.7	7.2	7.4
12H	6.6	7.1	6.9	7.4	7.6	6.4	6.9	6.7	7.1	7.4
4H 2H	6.8	7.4	7.0	7.6	7.8	6.6	7.1	6.8	7.3	7.5
3H	6.6	7.1	6.9	7.4	7.6	6.4	6.9	6.7	7.1	7.4
4H	6.5	7.0	6.8	7.3	7.6	6.3	6.7	6.6	7.0	7.3
6H	6.4	6.8	6.8	7.1	7.5	6.2	6.6	6.5	6.9	7.3
8H	6.4	6.7	6.7	7.1	7.4	6.1	6.5	6.5	6.9	7.2
12H	6.3	6.6	6.7	7.0	7.4	6.1	6.4	6.5	6.8	7.2
8H 4H	6.4	6.7	6.7	7.1	7.4	6.1	6.5	6.5	6.9	7.2
6H	6.2	6.6	6.7	6.9	7.4	6.0	6.3	6.4	6.7	7.1
8H	6.2	6.5	6.6	6.9	7.3	6.0	6.2	6.4	6.7	7.1
12H	6.1	6.4	6.6	6.8	7.3	5.9	6.1	6.4	6.6	7.0
12H 4H	6.3	6.6	6.7	7.0	7.4	6.1	6.4	6.5	6.8	7.2
6H	6.2	6.5	6.6	6.9	7.3	6.0	6.2	6.4	6.6	7.1
8H	6.1	6.4	6.6	6.8	7.3	5.9	6.1	6.4	6.6	7.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.4 / -20.8					+ 3.5 / -21.4				
1.5H	+ 6.1 / -17.8					+ 6.2 / -17.8				
2.0H	+ 8.1 / -13.6					+ 8.1 / -12.5				

CIE Pub.117, 2196 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.7)
Area: 0.0206015 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-I4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	82	90	85	82	90	85	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	101	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

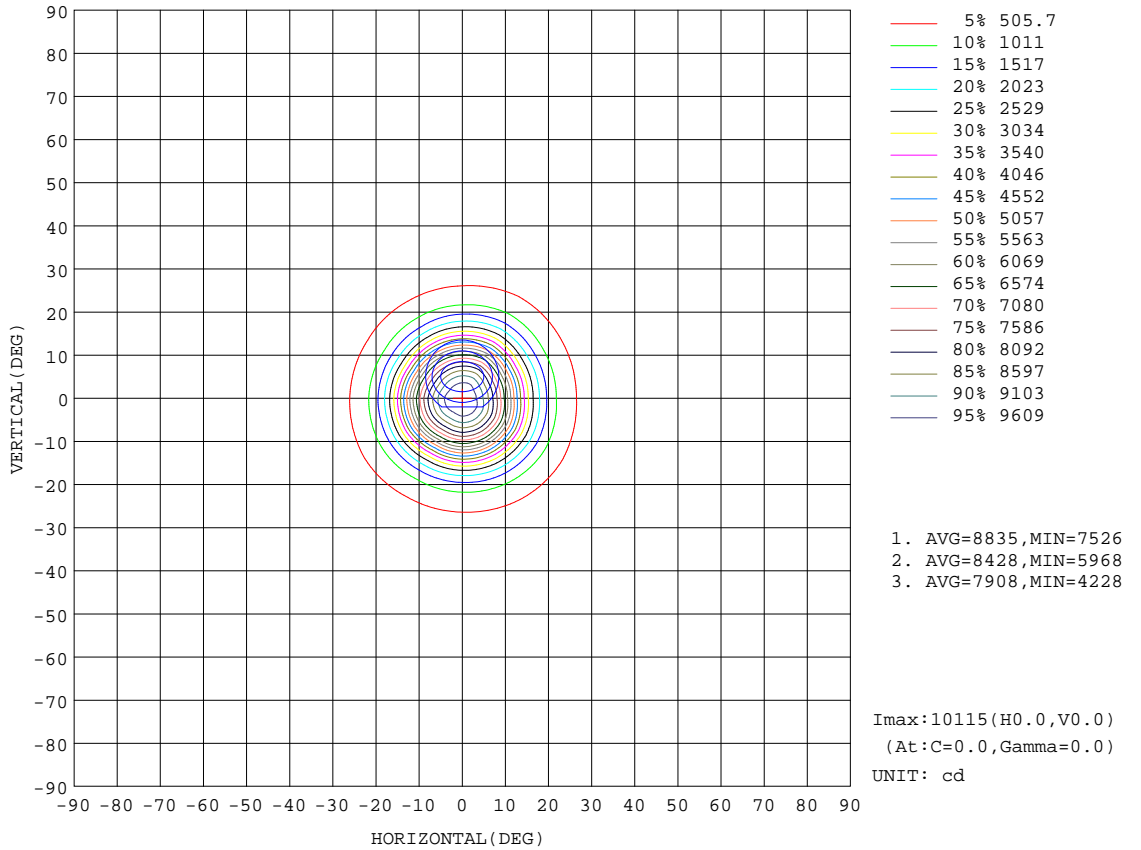


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

AAI Figure

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:1172 lm

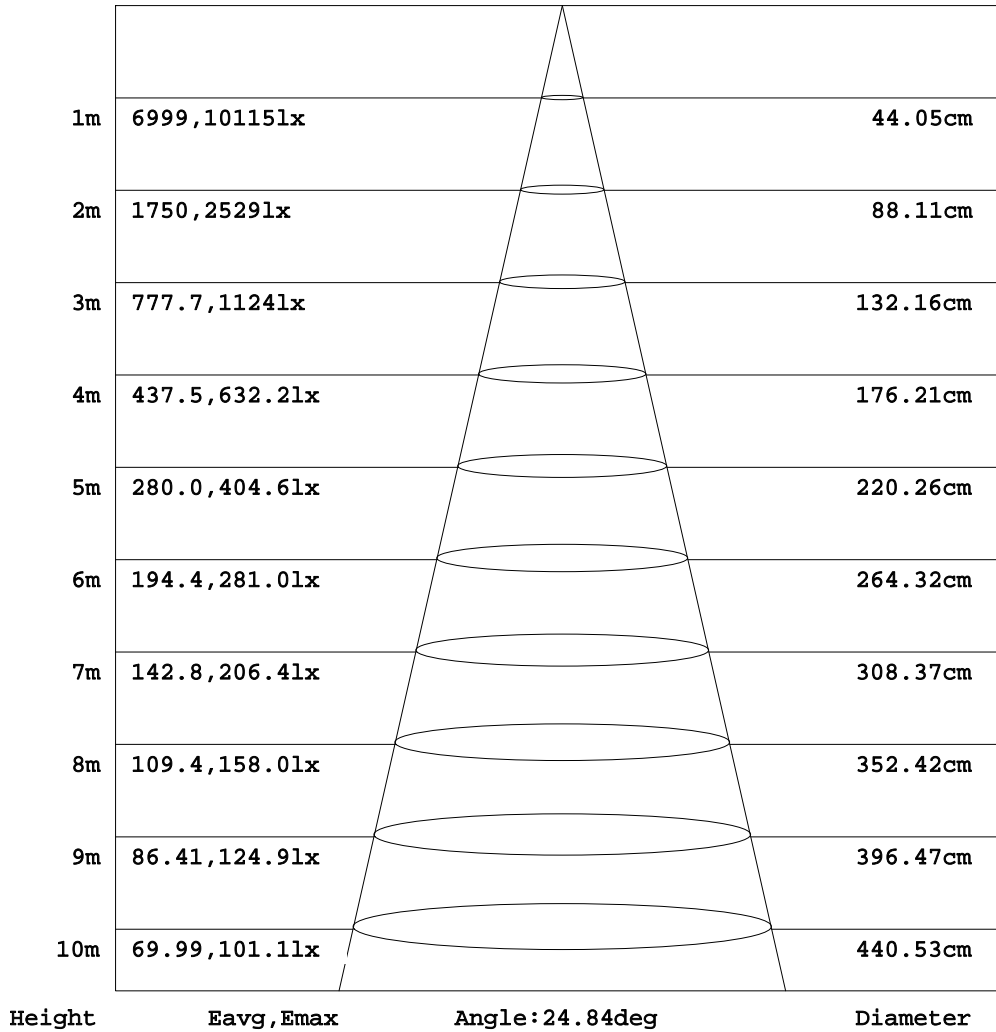


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

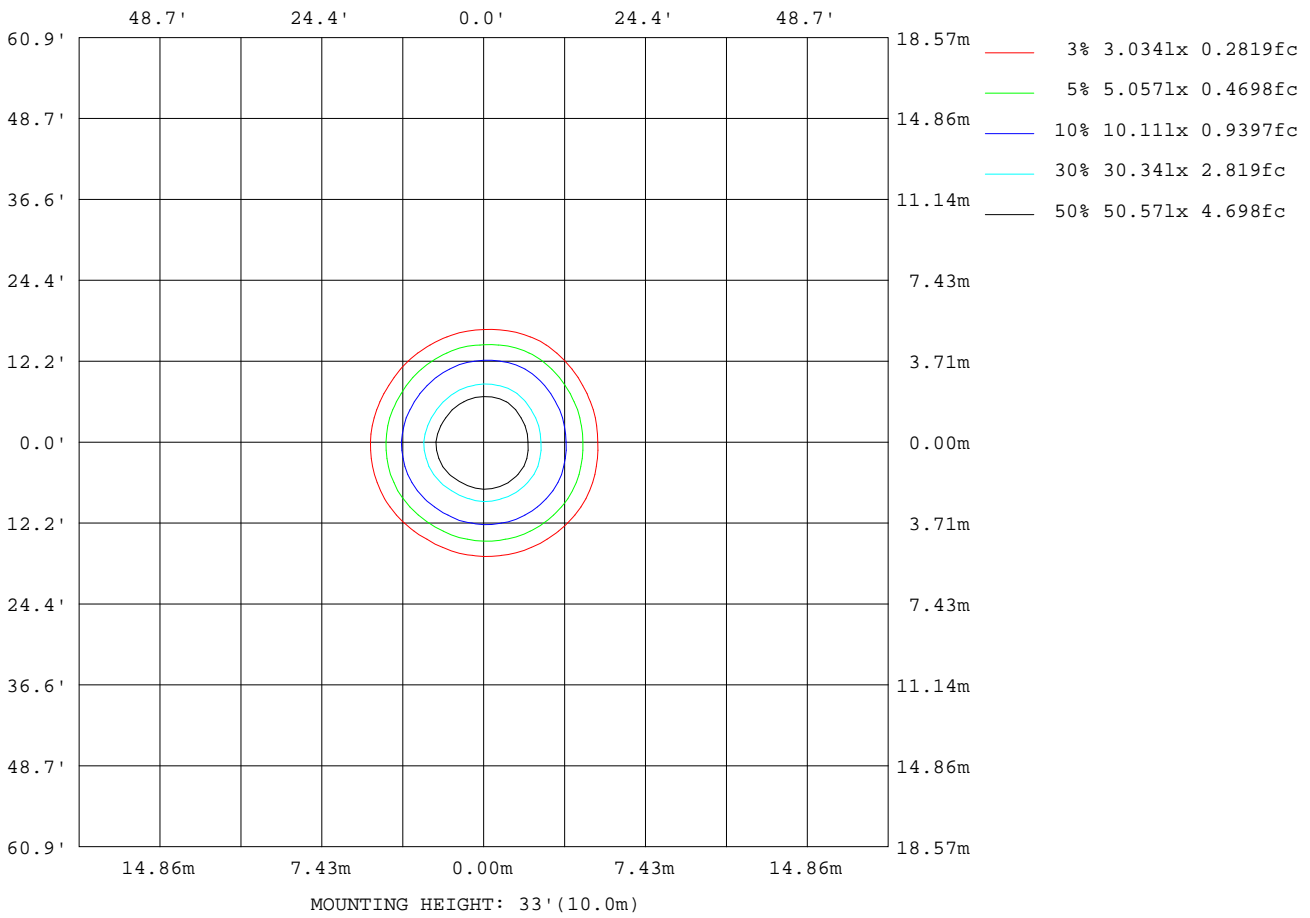

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	26
L_0~180 (75) av	17
L_0~180 (85) av	49
L_90~270 (65) av	23
L_90~270 (75) av	17
L_90~270 (85) av	49
L_45 (65) av	25
L_45 (75) av	17
L_45 (85) av	47

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

Planar Illuminance Curve

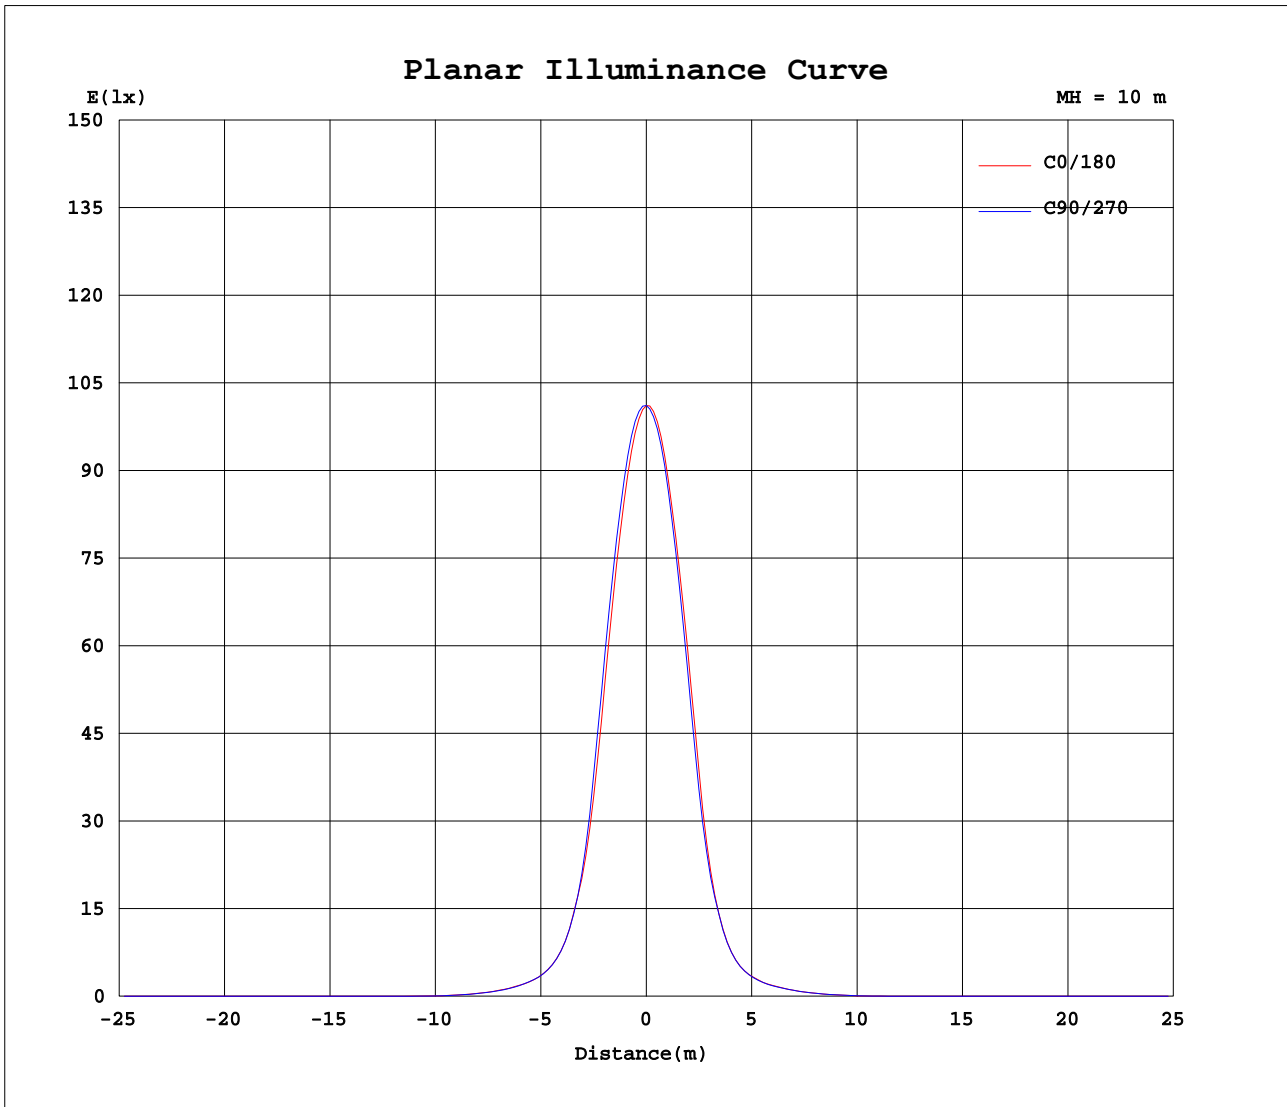

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:26.400V I:1.0490A P:27.694W PF:1.0000 Freq:0Hz Lamp Flux:2195.93x1 lm		
NAME: XDL E6-WRA-L4X9030-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: x10cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1011	1011	1011	1011	1011	1009	1011	1011	1011	1011	1011	1009							
5	903	928	936	936	925	935	935	912	913	919	923	903							
10	639	685	694	690	675	698	696	654	653	662	676	641							
15	319	354	357	346	330	357	355	315	316	330	349	319							
20	139	154	149	139	131	140	138	124	127	136	150	139							
25	61.7	67.1	65.0	61.3	58.4	60.4	58.4	54.3	54.9	58.2	64.3	61.8							
30	33.3	35.3	35.3	33.5	32.3	32.8	32.1	30.0	29.9	31.6	33.9	33.3							
35	18.4	18.9	18.6	17.6	17.1	18.4	18.5	17.4	17.4	18.5	19.0	18.5							
40	8.32	8.58	8.01	7.84	7.77	8.90	9.06	8.73	8.82	9.07	9.33	8.46							
45	2.14	2.10	1.88	1.83	1.87	2.18	2.27	2.22	2.45	2.51	2.51	2.10							
50	0.49	0.47	0.38	0.35	0.33	0.48	0.47	0.49	0.55	0.57	0.56	0.46							
55	0.18	0.17	0.17	0.15	0.15	0.16	0.16	0.16	0.16	0.17	0.18	0.17							
60	0.08	0.07	0.07	0.05	0.06	0.06	0.06	0.07	0.06	0.07	0.08	0.07							
65	0.03	0.02	0.03	0.02	0.02	0.01	0.01	0.02	0.02	0.03	0.03	0.03							
70	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.02							
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
80	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
85	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							

C Range: 0 - 360DEG γ Range: 0 - 90DEG
 C Interval: 30.0DEG γ Interval: 1.0DEG
 Test Speed: MEDIUM Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Temperature:25.3DEG Humidity:58%
 Operators:Jasoan Test Distance:9.322m [K=1.0000]
 Test Date:2024-09-12 Remarks: