
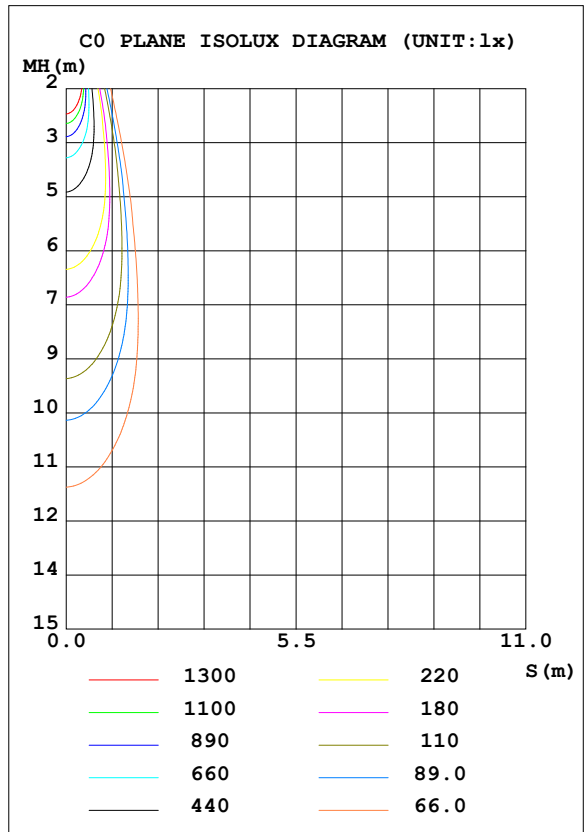


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.80 lm/W			
MODEL	XICATO-3000K	I <sub>max</sub> (cd)	8884	S/MH (C0/180)	0.42
NOMINAL POWER (W)	29	LOR (%)	100.0	S/MH (C90/270)	0.44
RATED VOLTAGE (V)	36	TOTAL FLUX (lm)	1973.2	η UP, DN (C0-180)	0.0, 45.6
NOMINAL FLUX (lm)	1973.19	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 54.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	31.6	η down (%)	100.0	CIBSE SHR MAX	0.30

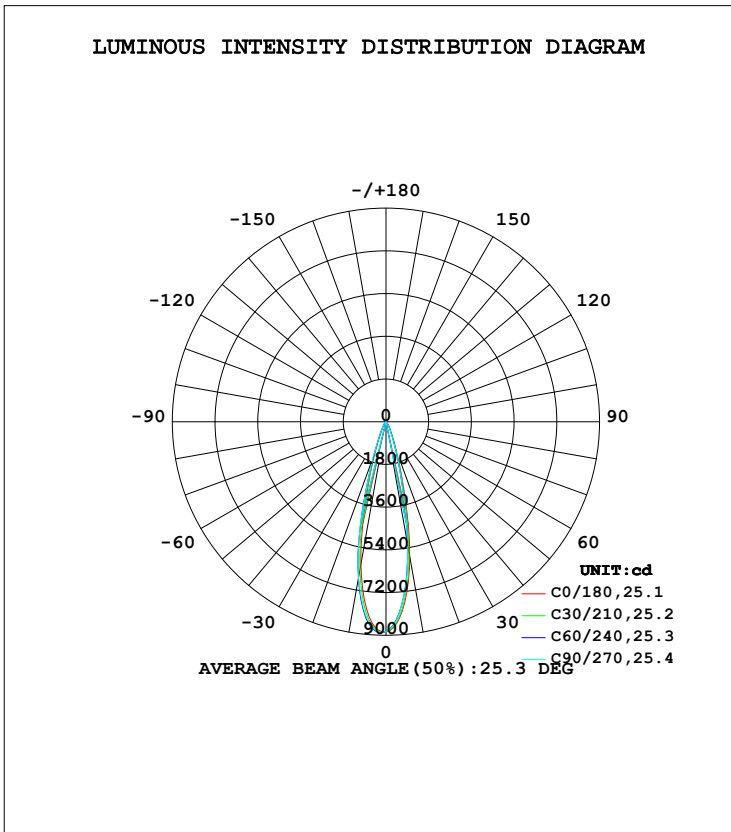

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature: 25.3DEG  
 Operators: Jasoan  
 Test Date: 2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity: 58%  
 Test Distance: 9.322m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5784	5416	5254	5426	6111	6522	6678	6352	0- 10	702.5	702.5	35.6,35.6
20	1237	1135	1074	1128	1313	1436	1578	1440	10- 20	859.9	1562	79.2,79.2
30	304.1	284.9	271.2	271.5	289.9	304.7	320.0	331.1	20- 30	280.2	1843	93.4,93.4
40	77.51	69.45	65.78	68.39	78.08	86.18	88.73	89.21	30- 40	106.7	1949	98.8,98.8
50	4.414	3.455	2.889	3.196	3.967	4.950	5.510	5.194	40- 50	21.89	1971	99.9,99.9
60	0.8173	0.5916	0.4477	0.4759	0.4881	0.6150	0.7219	0.7849	50- 60	1.482	1973	100,100
70	0.2654	0.1190	0.0951	0.1054	0.0882	0.1054	0.1497	0.2039	60- 70	0.2706	1973	100,100
80	0.0952	0.0850	0.0816	0.0851	0.0748	0.0748	0.0816	0.0816	70- 80	0.0980	1973	100,100
90	0.0884	0.0850	0.0816	0.0816	0.0748	0.0748	0.0748	0.0816	80- 90	0.0891	1973	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1966.9 lm

%lum = 99.7%  
 %lamp = 99.7%

Conical surface Flux(120deg): 1972.7 lm

%lum = 100.0%  
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:1966.9      %lum: 99.7%  
 135 - 180 DEG Zonal Flux:0      %lum: 0.0%


All measured values may vary less than 35 %  
 from the average measured value in the 0 to 130 deg. zone: 4.7%  
 All measured values in the 0 to 130 deg. zone  
 may vary less than 50% from the average value of itself: 6.9%

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity:58%  
 Test Distance:9.322m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-I4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

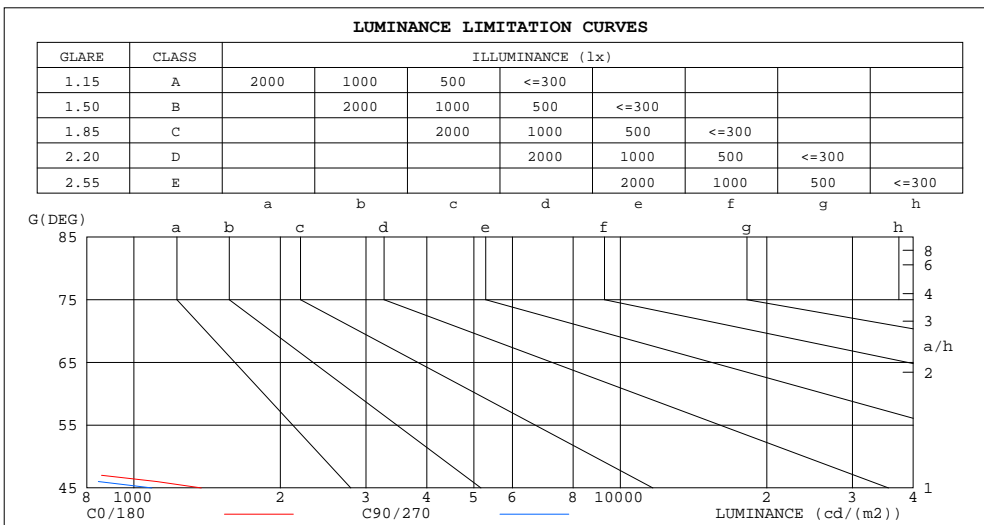

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	53	45
80	27	23
75	18	15
70	38	13
65	44	16
60	79	43
55	150	109
50	333	218
45	1376	1089


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature: 25.3DEG  
 Operators: Jasoan  
 Test Date: 2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity: 58%  
 Test Distance: 9.322m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.02	1.01	.00	.99	.98	.97
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93
3.0	1.03	.99	.97	1.02	.98	.96	.99	.97	.94	.97	.95	.93	.95	.93	.91	.90
4.0	.99	.95	.92	.98	.94	.91	.96	.93	.90	.94	.91	.89	.92	.90	.88	.87
5.0	.95	.91	.88	.94	.91	.88	.93	.90	.87	.91	.89	.86	.90	.88	.86	.84
6.0	.92	.88	.85	.91	.87	.85	.90	.87	.84	.89	.86	.83	.88	.85	.83	.82
7.0	.89	.85	.82	.88	.84	.82	.87	.84	.81	.86	.83	.81	.85	.83	.81	.79
8.0	.86	.82	.79	.86	.82	.79	.85	.81	.79	.84	.81	.78	.83	.80	.78	.77
9.0	.84	.80	.77	.83	.79	.77	.82	.79	.77	.82	.79	.76	.81	.78	.76	.75
10.0	.81	.77	.75	.81	.77	.75	.80	.77	.74	.80	.76	.74	.79	.76	.74	.73

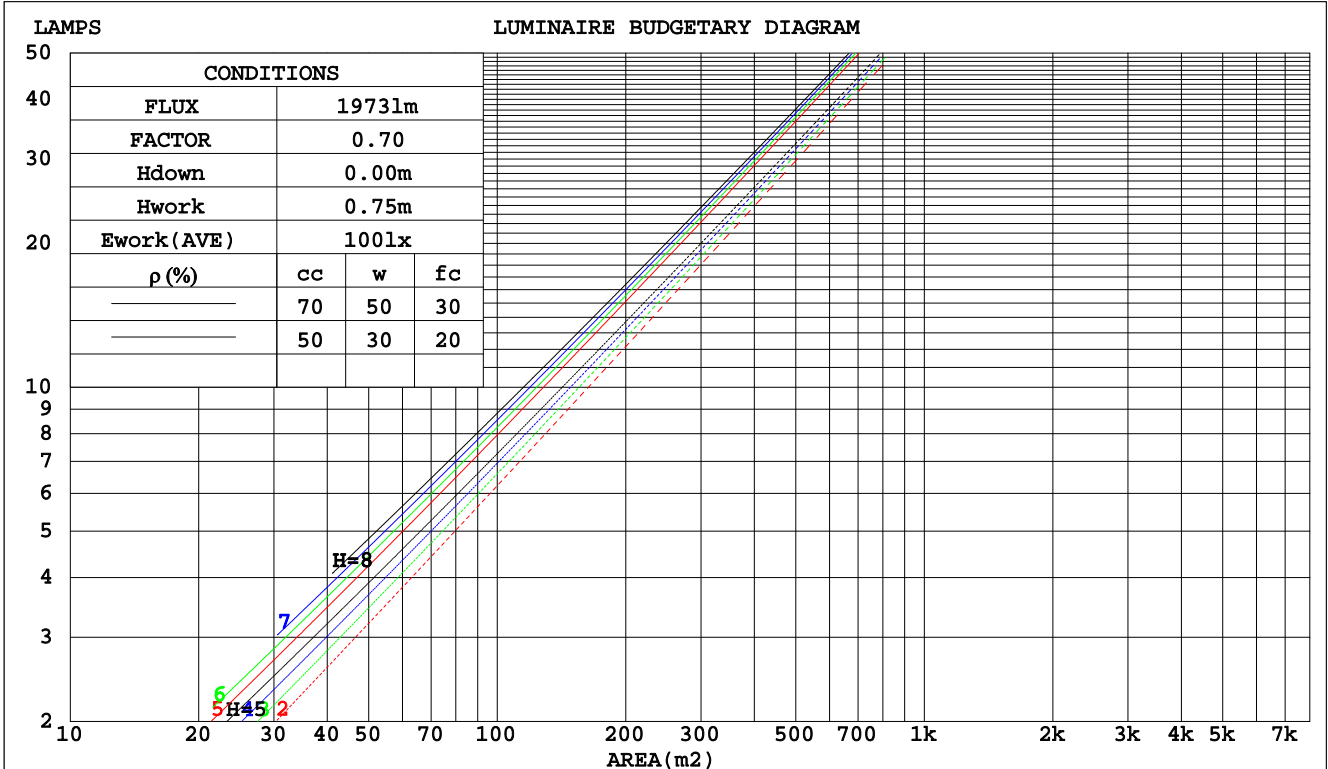

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature: 25.3DEG  
 Operators: Jasoan  
 Test Date: 2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity: 58%  
 Test Distance: 9.322m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.137	.078	.025	.130	.074	.024	.118	.068	.022	.106	.061	.020	.096	.056	.018	
2.0	.127	.070	.021	.122	.067	.021	.111	.062	.019	.102	.057	.018	.093	.053	.017	
3.0	.118	.063	.019	.114	.061	.018	.105	.057	.017	.098	.053	.016	.090	.050	.015	
4.0	.111	.058	.017	.107	.056	.017	.100	.053	.016	.094	.050	.015	.087	.047	.014	
5.0	.105	.053	.015	.102	.052	.015	.095	.050	.015	.090	.047	.014	.084	.045	.014	
6.0	.099	.050	.014	.096	.049	.014	.091	.047	.014	.086	.045	.013	.082	.043	.013	
7.0	.094	.047	.013	.092	.046	.013	.087	.044	.013	.083	.043	.012	.079	.041	.012	
8.0	.090	.044	.012	.088	.043	.012	.084	.042	.012	.080	.041	.012	.076	.039	.011	
9.0	.086	.042	.012	.084	.041	.012	.081	.040	.011	.077	.039	.011	.074	.038	.011	
10.0	.082	.040	.011	.081	.039	.011	.078	.038	.011	.075	.037	.011	.072	.036	.010	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.150	.133	.118	.129	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014	
3.0	.135	.113	.096	.116	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.123	.098	.079	.105	.085	.069	.072	.059	.048	.042	.035	.029	.013	.011	.009	
5.0	.112	.086	.066	.097	.074	.057	.066	.052	.040	.039	.030	.024	.012	.010	.008	
6.0	.104	.076	.056	.089	.065	.048	.061	.046	.034	.036	.027	.020	.011	.009	.007	
7.0	.096	.067	.047	.083	.058	.041	.057	.041	.029	.033	.024	.017	.011	.008	.006	
8.0	.089	.061	.041	.077	.053	.036	.053	.037	.025	.031	.022	.015	.010	.007	.005	
9.0	.084	.055	.036	.072	.048	.031	.050	.034	.022	.029	.020	.013	.009	.007	.004	
10.0	.079	.050	.031	.068	.044	.027	.047	.031	.019	.028	.018	.012	.009	.006	.004	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity:58%  
 Test Distance:9.322m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.5	7.1	6.7	7.3	7.4	6.0	6.6	6.2	6.8	6.9
3H	6.3	6.9	6.6	7.1	7.3	5.8	6.4	6.1	6.6	6.8
4H	6.2	6.8	6.5	7.0	7.2	5.7	6.3	6.0	6.5	6.7
6H	6.2	6.7	6.4	6.9	7.2	5.7	6.2	5.9	6.4	6.7
8H	6.1	6.6	6.4	6.9	7.1	5.6	6.1	5.9	6.4	6.6
12H	6.1	6.6	6.4	6.8	7.1	5.6	6.1	5.9	6.3	6.6
4H 2H	6.2	6.8	6.5	7.0	7.2	5.7	6.3	6.0	6.5	6.7
3H	6.1	6.6	6.4	6.8	7.1	5.6	6.1	5.9	6.3	6.6
4H	6.0	6.4	6.3	6.7	7.0	5.5	5.9	5.8	6.2	6.5
6H	5.9	6.3	6.2	6.6	7.0	5.4	5.8	5.7	6.1	6.4
8H	5.8	6.2	6.2	6.6	6.9	5.3	5.7	5.7	6.0	6.4
12H	5.8	6.1	6.2	6.5	6.9	5.3	5.6	5.7	6.0	6.4
8H 4H	5.8	6.2	6.2	6.5	6.9	5.3	5.7	5.7	6.0	6.4
6H	5.7	6.0	6.1	6.4	6.8	5.2	5.5	5.6	5.9	6.3
8H	5.6	5.9	6.1	6.3	6.8	5.1	5.4	5.6	5.8	6.3
12H	5.6	5.8	6.0	6.3	6.7	5.1	5.3	5.5	5.8	6.2
12H 4H	5.8	6.1	6.2	6.5	6.9	5.3	5.6	5.7	6.0	6.4
6H	5.6	5.9	6.1	6.3	6.8	5.1	5.4	5.6	5.8	6.3
8H	5.6	5.8	6.0	6.3	6.7	5.1	5.3	5.5	5.8	6.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.7 / -20.0					+ 3.7 / -21.1				
1.5H	+ 6.3 / -17.7					+ 6.3 / -17.6				
2.0H	+ 8.2 / -13.3					+ 8.2 / -12.0				

CIE Pub.117, 1973 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.4)  
Area: 0.0206015 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:Jasoan  
Test Date:2024-09-12

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
Humidity:58%  
Test Distance:9.322m [K=1.0000]  
Remarks:

UTILIZATION FACTORS TABLE

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	82	90	85	82	90	85	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	101	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity:58%  
 Test Distance:9.322m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

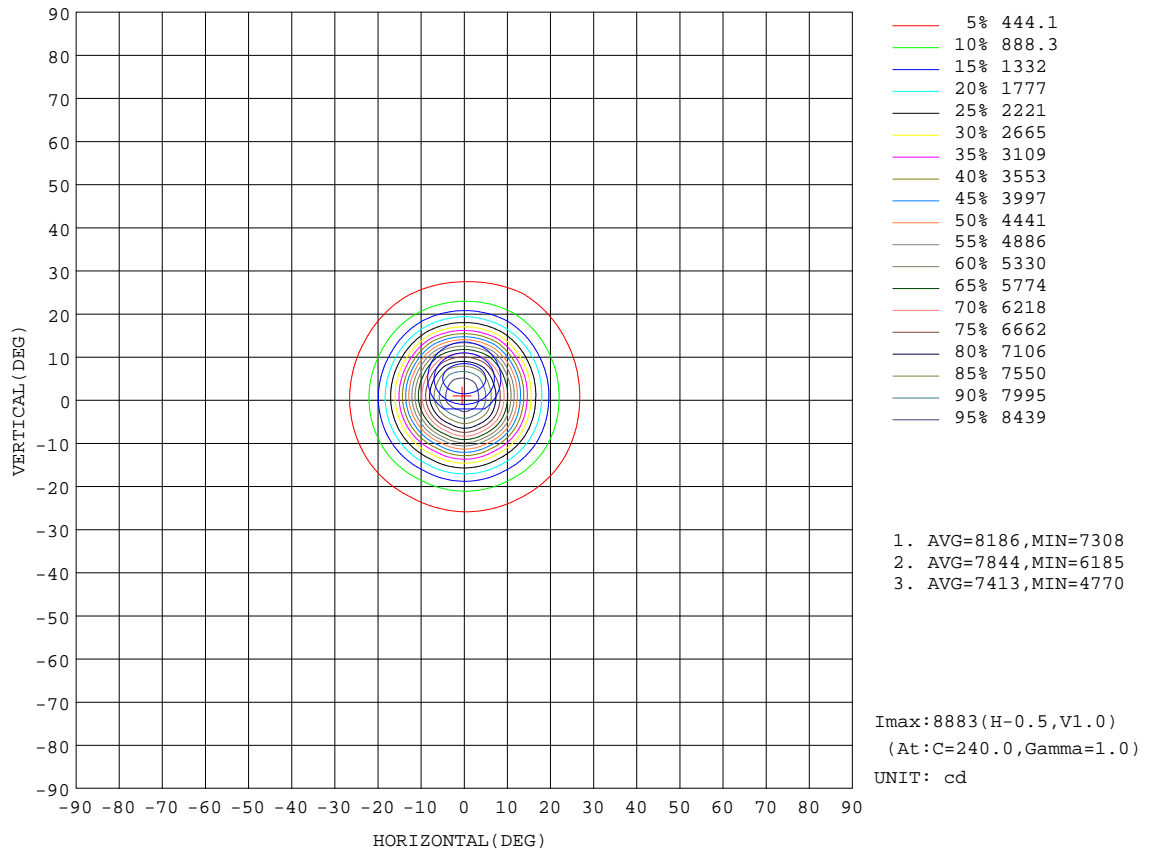

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:Jasoan  
Test Date:2024-09-12


γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
Humidity:58%  
Test Distance:9.322m [K=1.0000]  
Remarks:



AAI Figure

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:1034 lm

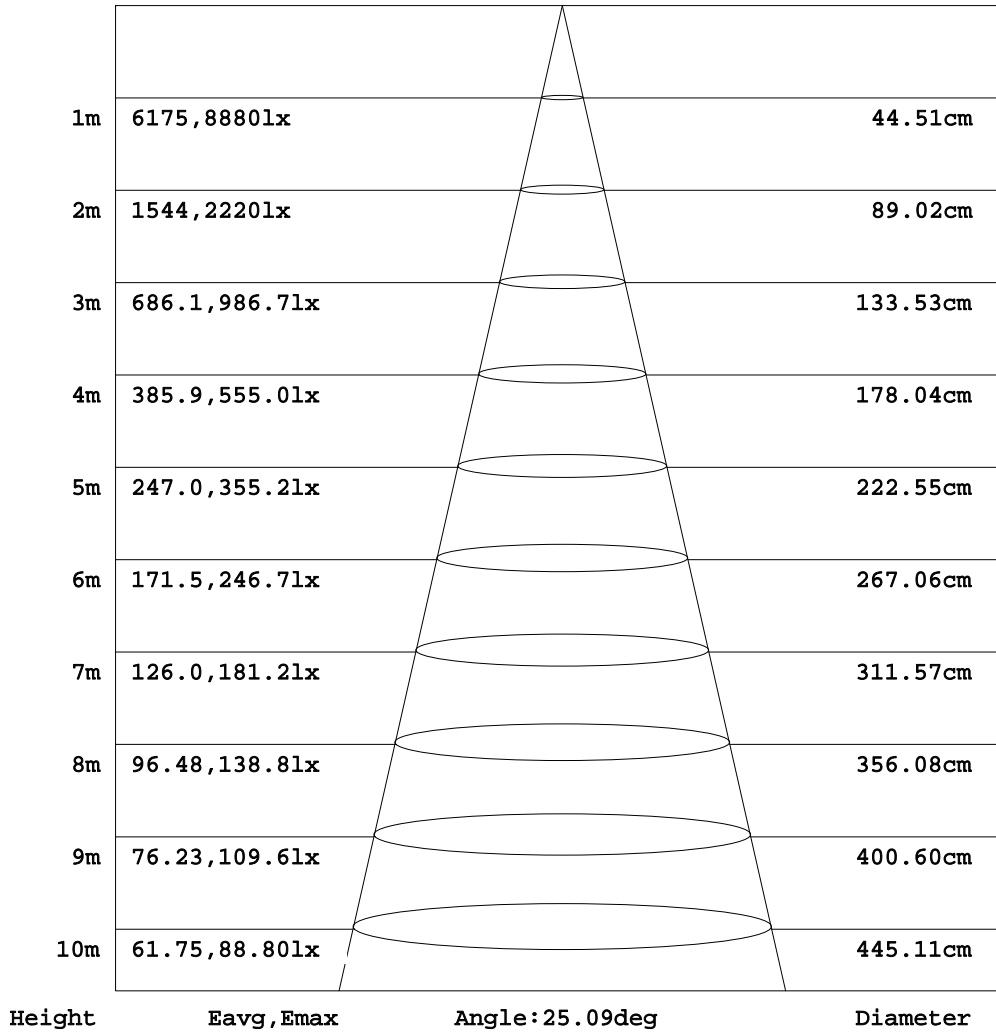


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:Jasoan  
Test Date:2024-09-12

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
Humidity:58%  
Test Distance:9.322m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-I4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: $\phi$ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

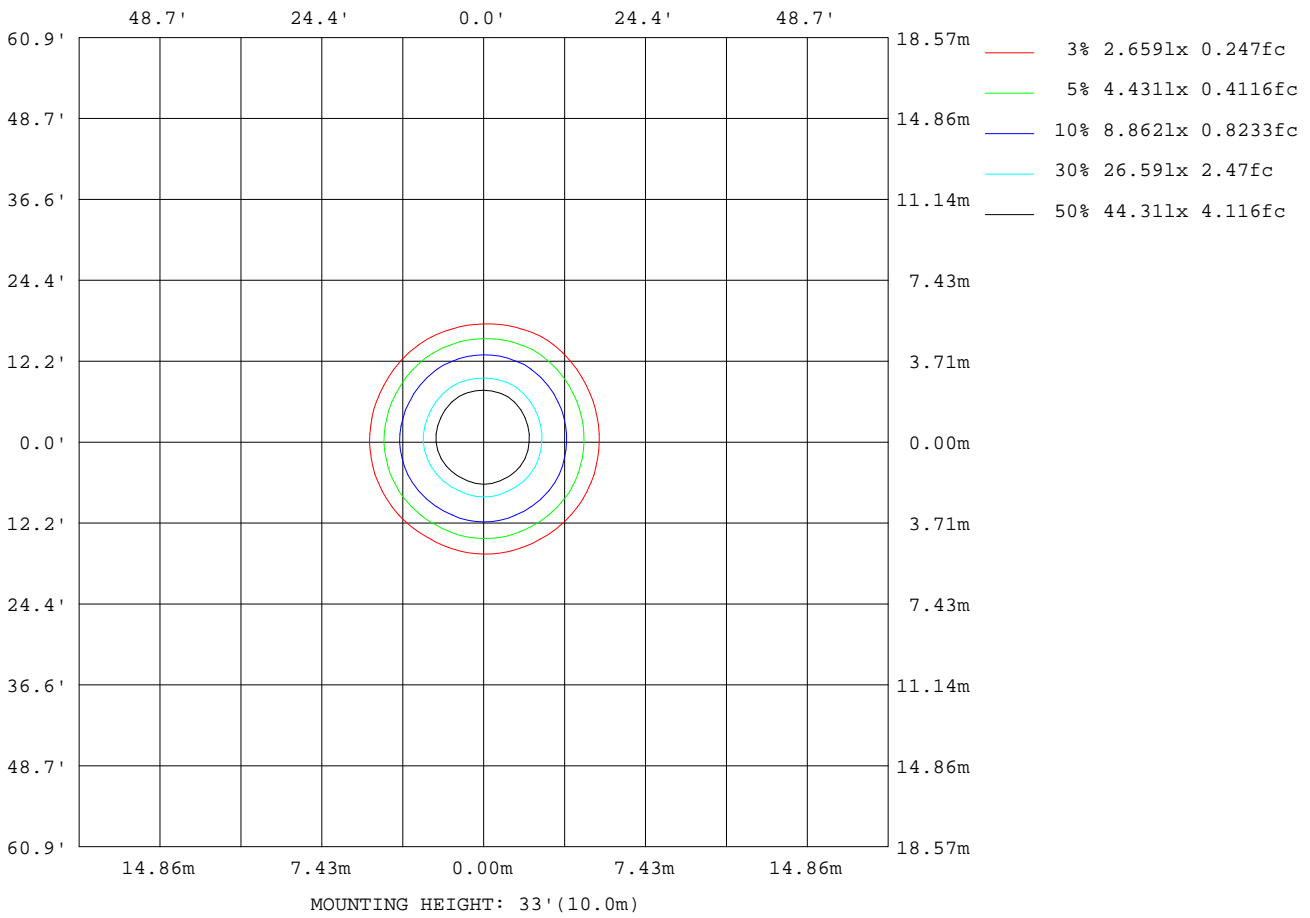

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2024-09-12

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity:58%  
 Test Distance:9.322m [K=1.0000]  
 Remarks:

LED Avg.L Report

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz		
Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	29
L_0~180 (75) av	16
L_0~180 (85) av	47
L_90~270 (65) av	21
L_90~270 (75) av	16
L_90~270 (85) av	45
L_45 (65) av	25
L_45 (75) av	16
L_45 (85) av	45

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity:58%  
 Test Distance:9.322m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

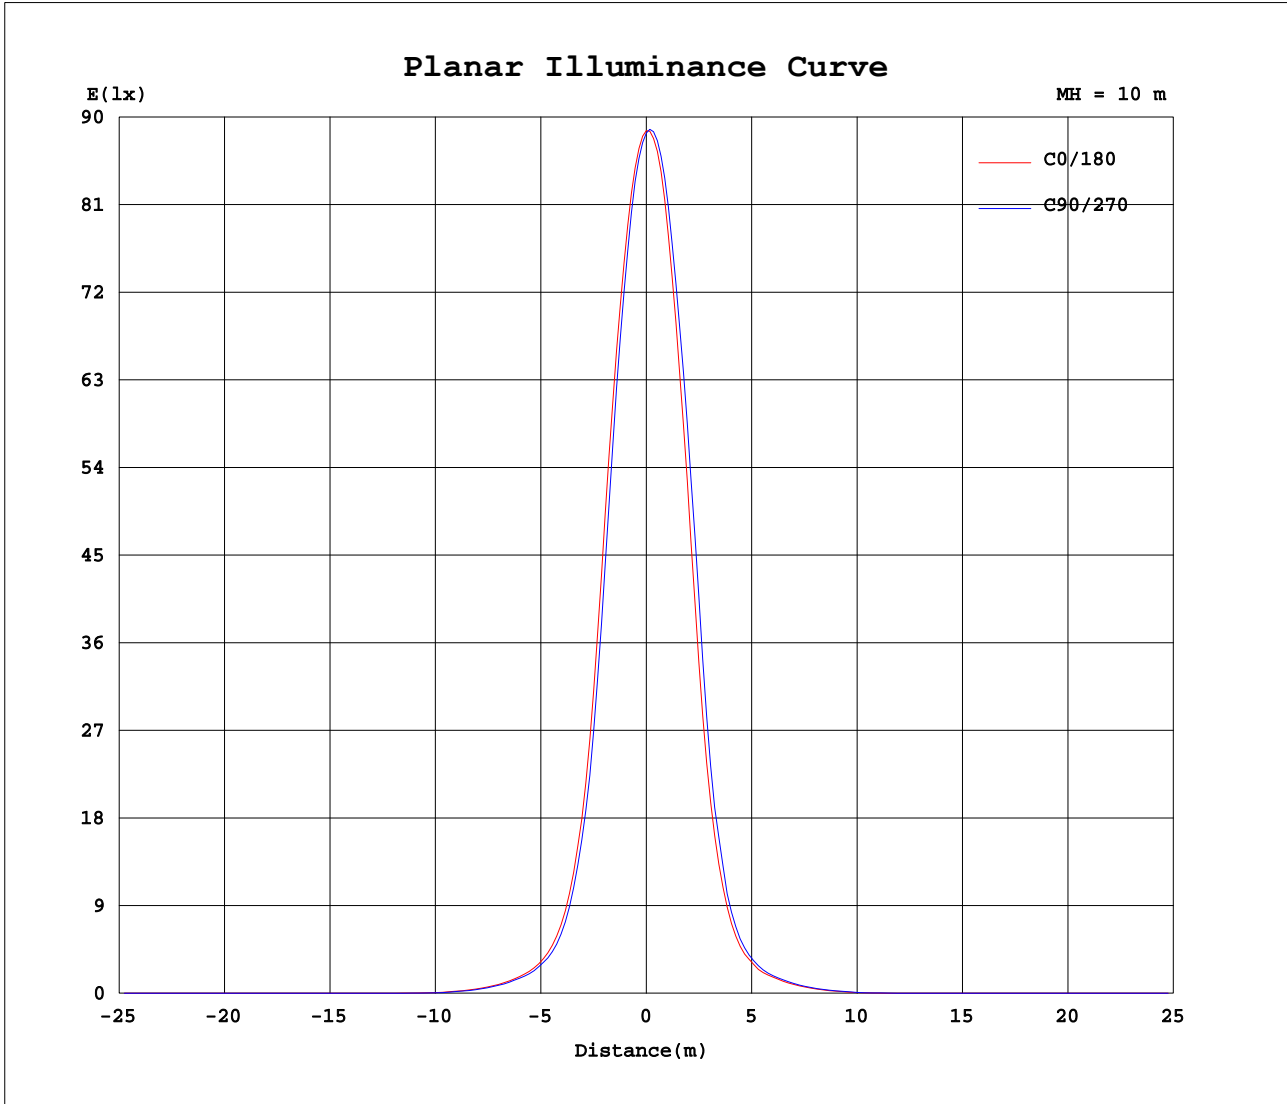

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3DEG  
Operators: Jasoan  
Test Date: 2024-09-12

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
Humidity: 58%  
Test Distance: 9.322m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:31.600V I:0.9490A P:29.988W PF:1.0000 Freq:0Hz Lamp Flux:1973.19x1 lm		
NAME: XDL E6-WRA-L4X9530-25DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	8862	8859	8838	8837	8808	8801	8862	8859	8838	8837	8808	8801						
5	7980	7901	7715	7715	7684	7934	8242	8365	8519	8471	8386	8114						
10	5784	5584	5249	5254	5212	5640	6111	6348	6696	6678	6584	6121						
15	2888	2732	2486	2481	2474	2797	3170	3388	3831	3814	3771	3219						
20	1237	1186	1083	1074	1062	1195	1313	1356	1515	1578	1532	1348						
25	560	540	500	489	473	506	542	562	608	627	660	600						
30	304	291	279	271	268	275	290	299	310	320	340	323						
35	167	160	151	150	147	155	165	170	178	185	191	177						
40	77.5	73.1	65.8	65.8	64.6	72.2	78.1	82.4	90.0	88.7	93.5	84.9						
45	20.0	18.6	15.9	15.9	16.3	19.0	19.7	20.7	26.7	25.0	25.9	21.0						
50	4.41	3.88	3.03	2.89	2.71	3.68	3.97	4.46	5.45	5.51	5.52	4.86						
55	1.78	1.55	1.42	1.29	1.28	1.34	1.38	1.52	1.59	1.71	1.75	1.77						
60	0.82	0.63	0.55	0.45	0.48	0.47	0.49	0.60	0.63	0.72	0.75	0.82						
65	0.38	0.22	0.22	0.14	0.20	0.12	0.12	0.20	0.13	0.23	0.24	0.37						
70	0.27	0.11	0.13	0.10	0.12	0.10	0.09	0.12	0.09	0.15	0.14	0.27						
75	0.10	0.08	0.09	0.08	0.10	0.08	0.07	0.09	0.07	0.09	0.07	0.10						
80	0.10	0.08	0.09	0.08	0.09	0.08	0.07	0.08	0.07	0.08	0.07	0.09						
85	0.10	0.08	0.09	0.08	0.09	0.08	0.07	0.08	0.07	0.08	0.07	0.09						
90	0.09	0.08	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.09						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2024-09-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.444  
 Humidity:58%  
 Test Distance:9.322m [K=1.0000]  
 Remarks: