
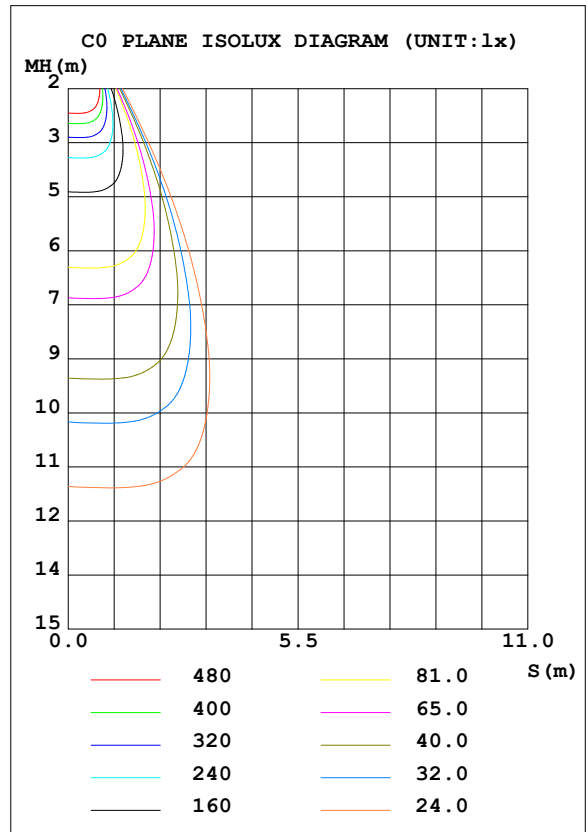


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.24 lm/W			
MODEL	XICATO-3000K	I _{max} (cd)	3324	S/MH (C0/180)	0.81
NOMINAL POWER (W)	29	LOR (%)	100.0	S/MH (C90/270)	0.72
RATED VOLTAGE (V)	36	TOTAL FLUX (lm)	2173.3	η UP, DN (C0-180)	0.0, 51.2
NOMINAL FLUX (lm)	2173.25	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 48.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	31.7	η down (%)	100.0	CIBSE SHR MAX	0.75

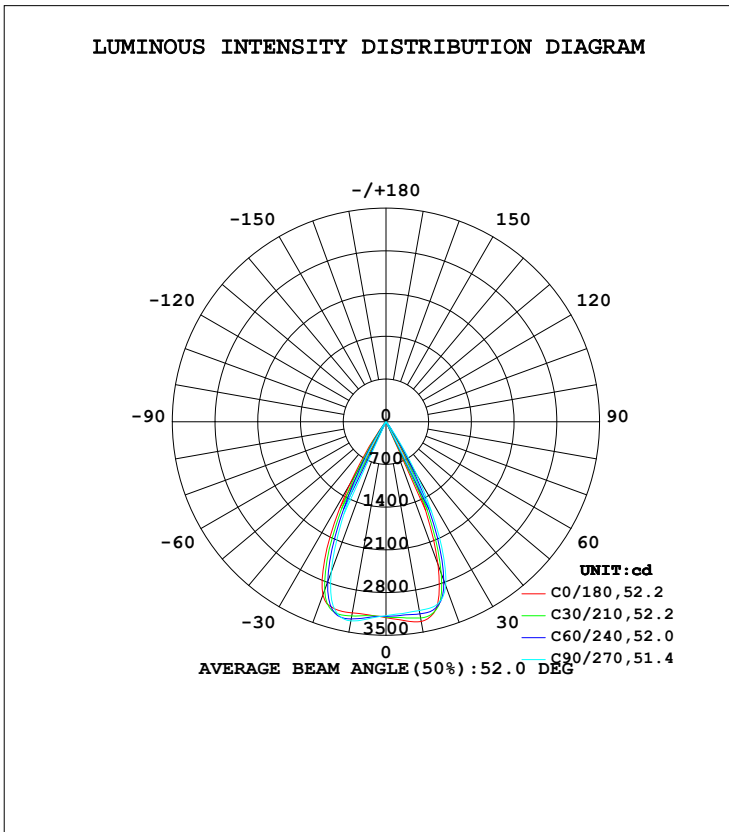

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3323	3231	3142	3108	3181	3256	3314	3318	0- 10	306.6	306.6	14.1,14.1
20	2492	2710	2860	2955	3021	2869	2628	2478	10- 20	874.7	1181	54.4,54.4
30	438.1	689.6	1028	1232	1210	852.3	541.0	417.8	20- 30	807.3	1989	91.5,91.5
40	31.81	49.71	70.45	84.85	80.81	54.82	36.75	28.12	30- 40	168.0	2157	99.2,99.2
50	1.866	3.127	5.207	6.929	6.128	3.177	1.637	1.384	40- 50	15.00	2172	99.9,99.9
60	0.4156	0.6426	0.7197	0.7786	0.6174	0.4554	0.3472	0.2719	50- 60	1.277	2173	100,100
70	0.1163	0.1564	0.1223	0.1360	0.1114	0.1190	0.1020	0.1088	60- 70	0.2529	2173	100,100
80	0.1020	0.0918	0.0748	0.0884	0.0952	0.0952	0.0952	0.1028	70- 80	0.1046	2173	100,100
90	0.1020	0.0884	0.0884	0.0884	0.0952	0.0952	0.0884	0.0918	80- 90	0.1018	2173	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2168.1 lm

%lum = 99.8%
 %lamp = 99.8%

Conical surface Flux(120deg): 2172.8 lm

%lum = 100.0%
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:2168.1 %lum: 99.8%
 135 - 180 DEG Zonal Flux:0 %lum: 0.0%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 3.5%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 5.5%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-I4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

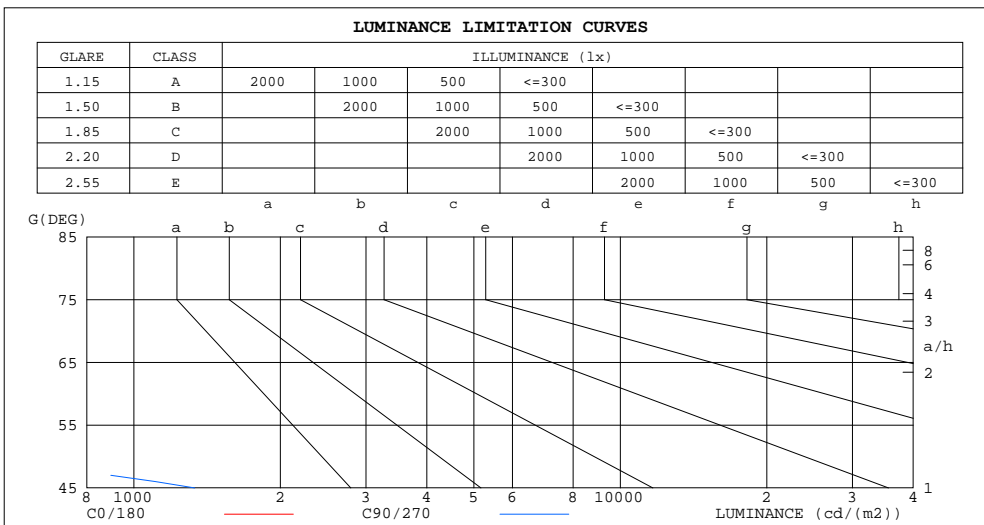

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	57	42
80	29	21
75	19	14
70	17	17
65	26	29
60	40	70
55	82	135
50	141	393
45	603	1334


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.05	1.02	.99	1.04	1.00	.98	1.00	.98	.96	.98	.95	.94	.95	.93	.92	.90
3.0	.00	.95	.92	.98	.94	.91	.96	.92	.90	.93	.91	.88	.91	.89	.87	.85
4.0	.94	.89	.86	.93	.89	.85	.91	.87	.84	.89	.86	.83	.87	.85	.82	.81
5.0	.89	.84	.81	.89	.84	.80	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.85	.80	.76	.84	.79	.76	.83	.79	.75	.82	.78	.75	.80	.77	.74	.73
7.0	.81	.76	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.70
8.0	.77	.72	.69	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.68	.66
9.0	.74	.69	.65	.73	.68	.65	.72	.68	.65	.72	.68	.65	.71	.67	.64	.63
10.0	.70	.65	.62	.70	.65	.62	.69	.65	.62	.69	.65	.62	.68	.64	.62	.60

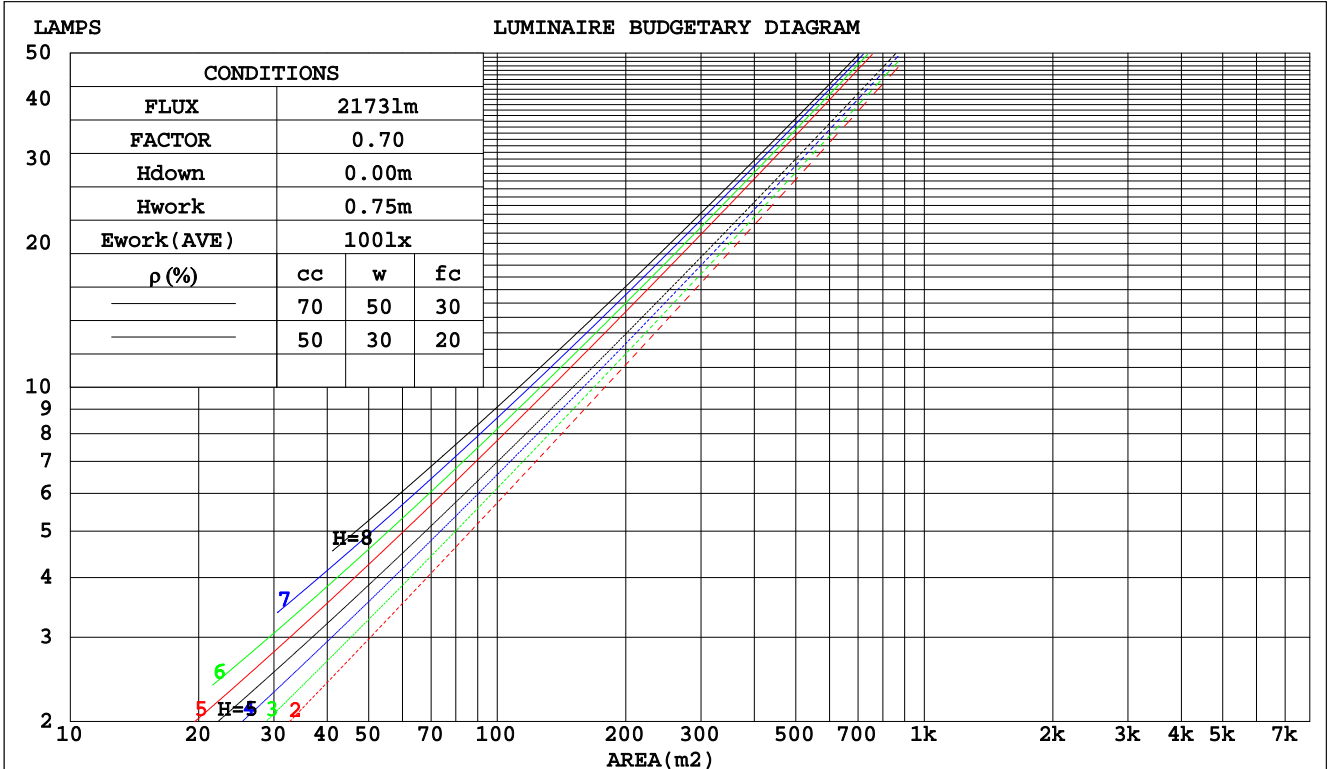

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz		
Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.158	.090	.028	.151	.086	.027	.139	.080	.025	.127	.073	.024	.117	.068	.022	
2.0	.149	.082	.025	.143	.079	.024	.133	.074	.023	.123	.069	.022	.115	.065	.020	
3.0	.141	.075	.022	.136	.073	.022	.127	.069	.021	.119	.065	.020	.112	.062	.019	
4.0	.134	.070	.020	.130	.068	.020	.122	.065	.019	.115	.062	.019	.109	.059	.018	
5.0	.127	.065	.019	.124	.064	.019	.117	.061	.018	.111	.059	.017	.106	.057	.017	
6.0	.122	.061	.017	.119	.060	.017	.113	.058	.017	.108	.056	.016	.103	.054	.016	
7.0	.117	.058	.016	.114	.057	.016	.109	.055	.016	.104	.053	.016	.100	.052	.015	
8.0	.112	.055	.015	.109	.054	.015	.105	.052	.015	.101	.051	.015	.097	.050	.015	
9.0	.107	.052	.015	.105	.051	.014	.101	.050	.014	.098	.049	.014	.094	.048	.014	
10.0	.104	.050	.014	.102	.049	.014	.098	.048	.014	.095	.047	.013	.092	.046	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.115	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.140	.113	.093	.120	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011	
4.0	.128	.098	.076	.110	.085	.066	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.119	.086	.062	.102	.075	.054	.070	.052	.038	.041	.031	.023	.013	.010	.008	
6.0	.111	.077	.052	.095	.067	.046	.066	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.104	.069	.044	.090	.060	.039	.062	.042	.027	.036	.025	.016	.012	.008	.005	
8.0	.098	.063	.038	.085	.054	.033	.059	.038	.024	.034	.023	.014	.011	.007	.005	
9.0	.093	.057	.033	.080	.050	.029	.056	.035	.020	.032	.021	.012	.011	.007	.004	
10.0	.089	.053	.029	.077	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz		
Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.7	5.5	5.0	5.7	5.9	10.1	10.9	10.3	11.1	11.2
3H	4.6	5.3	4.8	5.5	5.7	9.9	10.7	10.2	10.9	11.1
4H	4.5	5.2	4.8	5.4	5.6	9.8	10.6	10.1	10.8	11.0
6H	4.4	5.1	4.7	5.3	5.5	9.8	10.4	10.0	10.7	10.9
8H	4.4	5.0	4.7	5.3	5.5	9.7	10.4	10.0	10.6	10.9
12H	4.3	4.9	4.6	5.2	5.5	9.7	10.3	10.0	10.5	10.8
4H 2H	4.5	5.2	4.8	5.4	5.6	9.8	10.6	10.1	10.8	11.0
3H	4.3	4.9	4.6	5.2	5.5	9.7	10.3	10.0	10.5	10.8
4H	4.2	4.8	4.6	5.1	5.4	9.6	10.1	9.9	10.4	10.7
6H	4.1	4.6	4.5	4.9	5.3	9.5	10.0	9.8	10.3	10.6
8H	4.1	4.5	4.5	4.9	5.2	9.4	9.9	9.8	10.2	10.6
12H	4.0	4.4	4.4	4.8	5.2	9.4	9.8	9.8	10.2	10.5
8H 4H	4.1	4.5	4.5	4.9	5.2	9.4	9.9	9.8	10.2	10.6
6H	4.0	4.3	4.4	4.7	5.1	9.3	9.7	9.7	10.1	10.5
8H	3.9	4.2	4.4	4.7	5.1	9.3	9.6	9.7	10.0	10.4
12H	3.9	4.1	4.3	4.6	5.0	9.2	9.5	9.7	9.9	10.4
12H 4H	4.0	4.4	4.4	4.8	5.2	9.4	9.8	9.8	10.2	10.5
6H	3.9	4.2	4.4	4.7	5.1	9.3	9.6	9.7	10.0	10.4
8H	3.8	4.1	4.3	4.6	5.0	9.2	9.5	9.7	9.9	10.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.4 / -17.8					+ 4.9 / -19.8				
1.5H	+ 6.1 / -14.6					+ 7.5 / -17.0				
2.0H	+ 7.0 / - 8.8					+ 8.3 / -11.4				

CIE Pub.117, 2173 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.7)
 Area: 0.0206015 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-I4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	91	85	82	91	85	82	90	85	82	79
0.80	98	93	90	97	93	89	96	92	89	86
1.00	102	97	94	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

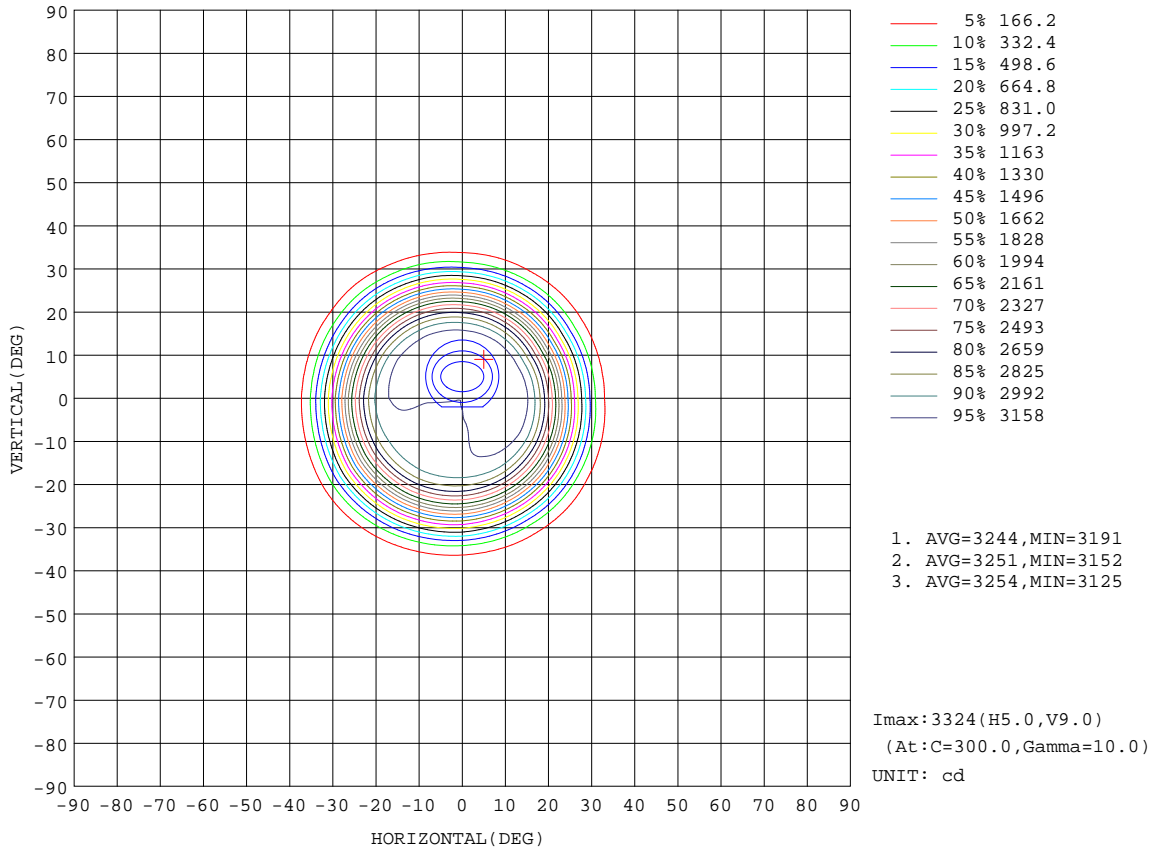


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

AAI Figure

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz		
Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:1745 lm

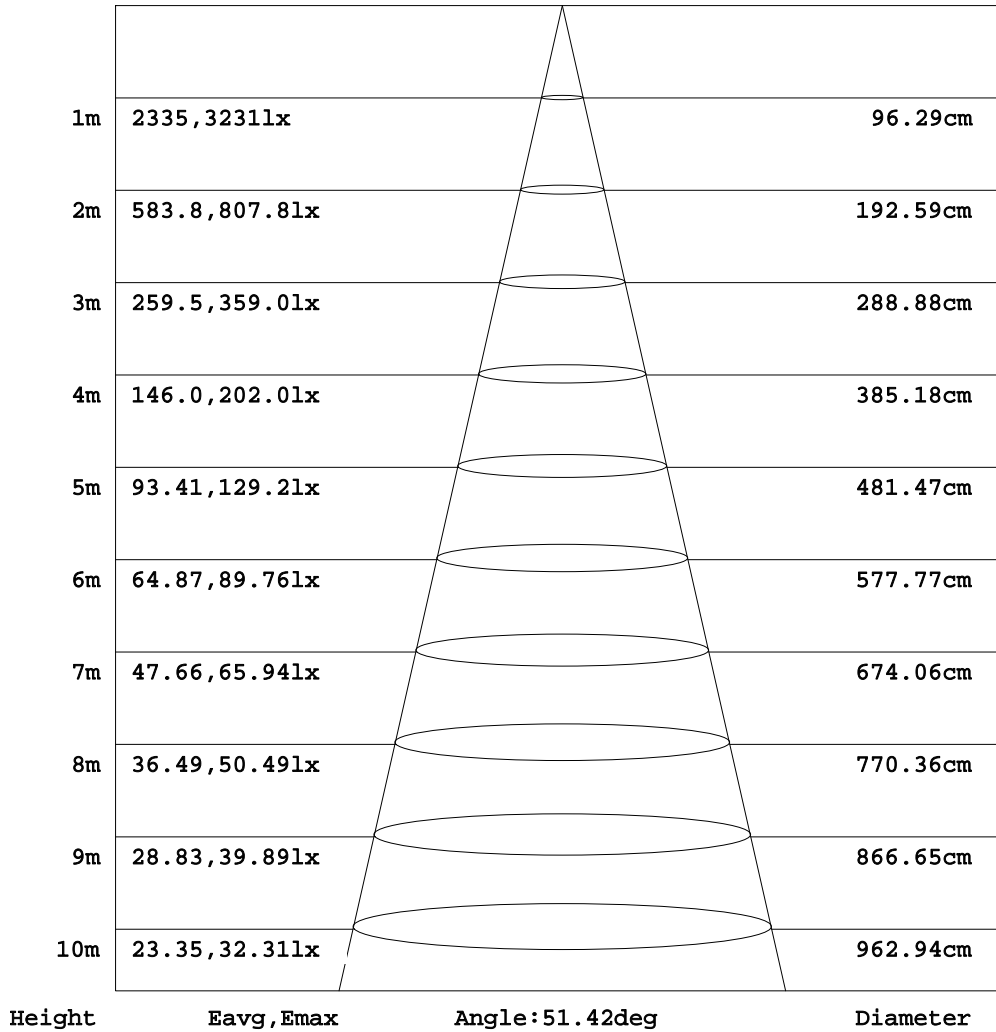


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-I4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

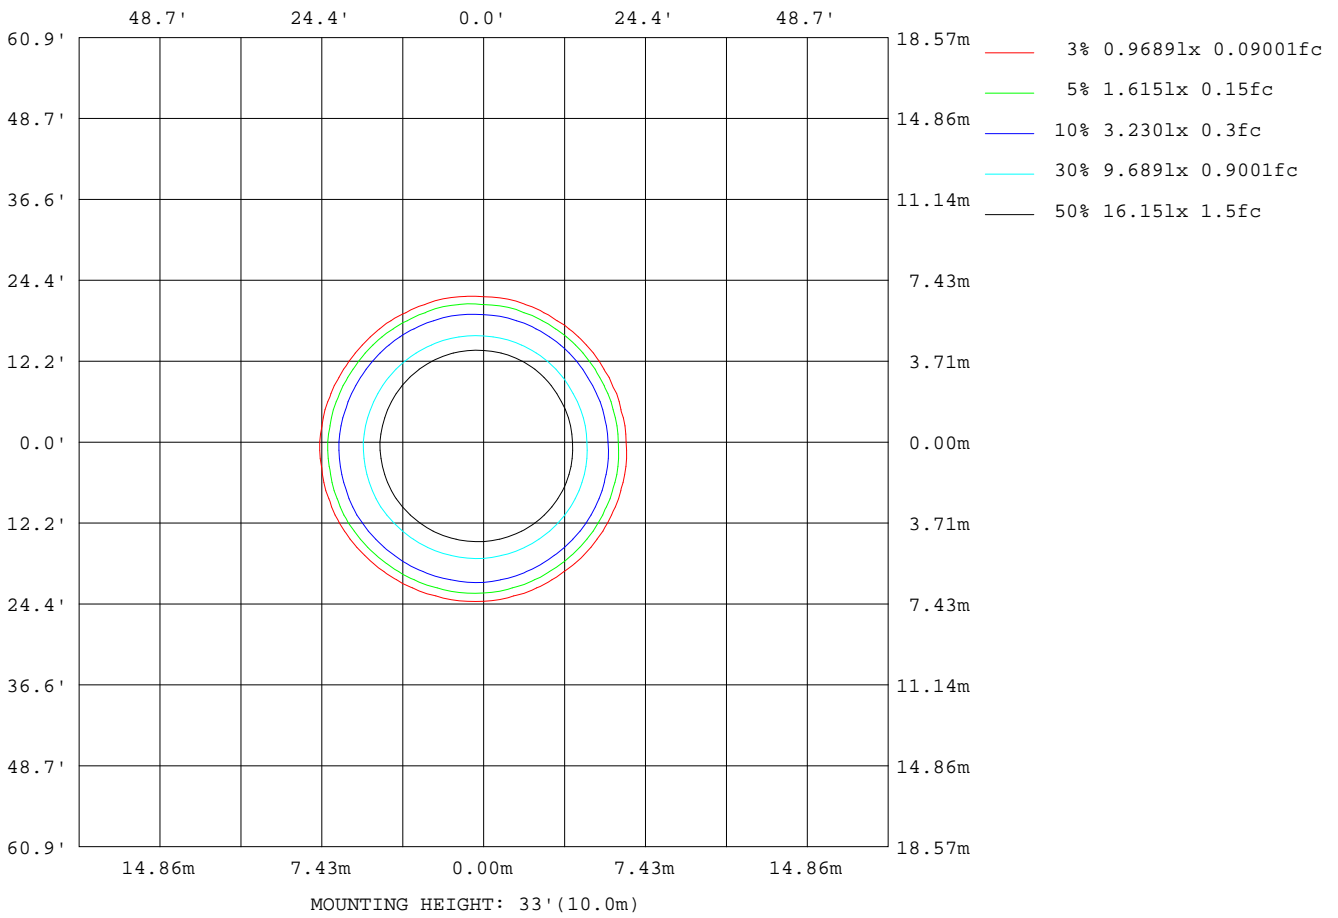

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	25
L_0~180 (75) av	18
L_0~180 (85) av	55
L_90~270 (65) av	23
L_90~270 (75) av	16
L_90~270 (85) av	47
L_45 (65) av	26
L_45 (75) av	18
L_45 (85) av	52

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

Planar Illuminance Curve

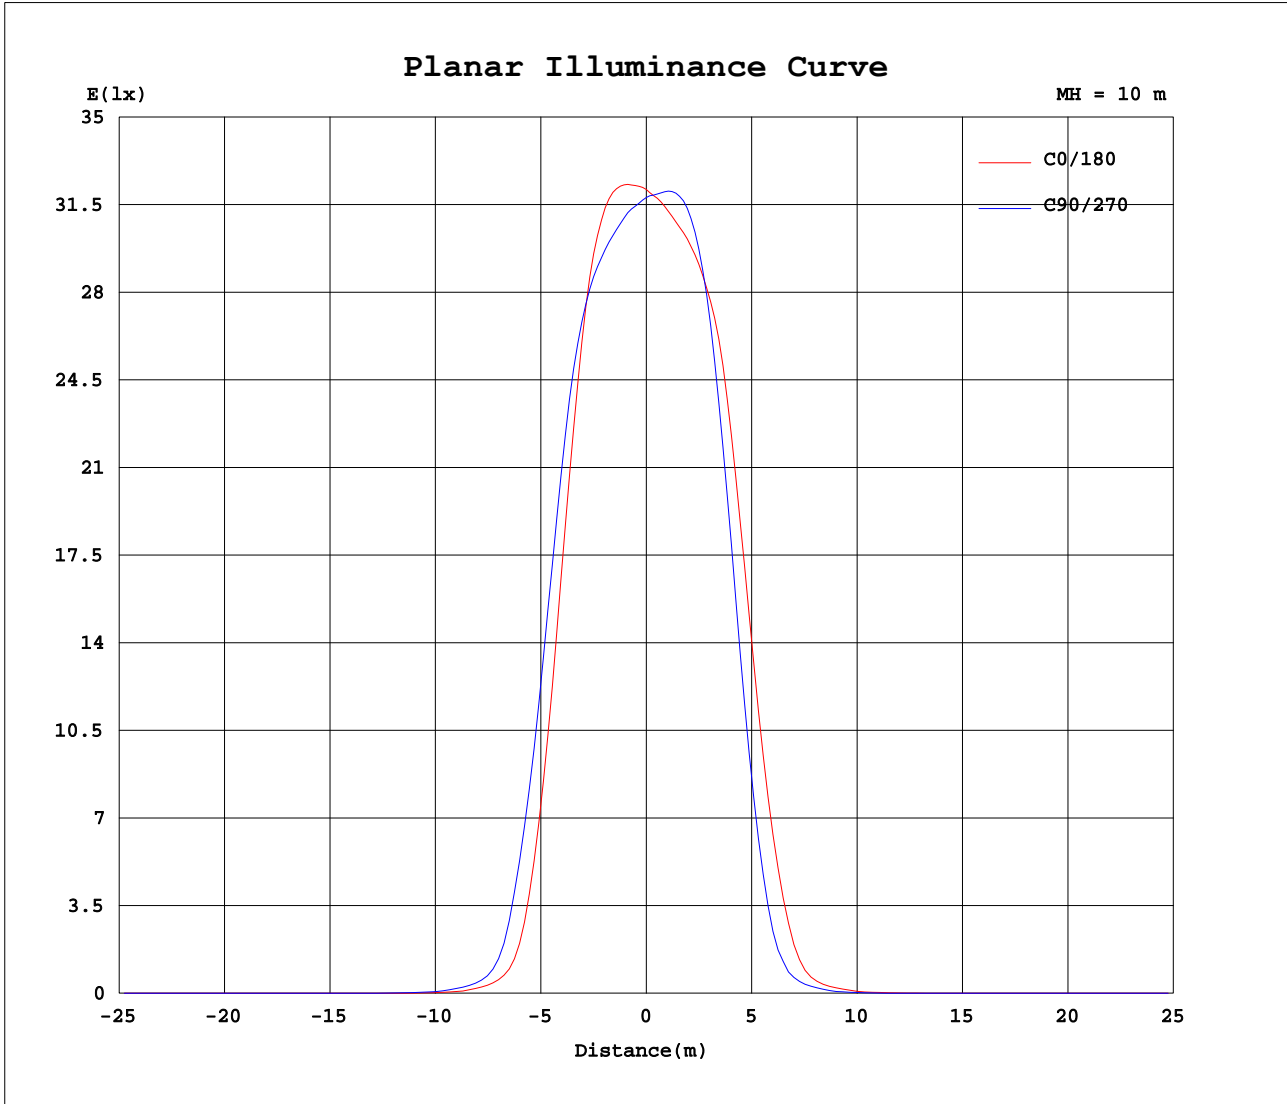

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:31.700V I:0.9490A P:30.083W PF:1.0000 Freq:0Hz Lamp Flux:2173.25x1 lm		
NAME: XDL E6-WRA-L4X9530-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Artist CRI 95 3000K	DIM.: ϕ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3211	3199	3189	3179	3169	3162	3211	3199	3189	3179	3169	3162						
5	3268	3222	3181	3154	3126	3122	3179	3190	3216	3239	3249	3245						
10	3323	3264	3197	3142	3109	3107	3181	3231	3280	3314	3324	3312						
15	3175	3185	3157	3122	3103	3105	3182	3236	3245	3207	3187	3144						
20	2492	2647	2774	2860	2940	2970	3021	2943	2795	2628	2523	2432						
25	1384	1614	1852	2057	2215	2311	2291	2072	1806	1553	1402	1308						
30	438	595	784	1028	1180	1283	1210	972	733	541	446	389						
35	99.4	129	175	252	328	408	354	231	155	115	98.0	90.3						
40	31.8	42.9	56.5	70.5	80.9	88.8	80.8	61.6	48.1	36.7	30.4	25.9						
45	8.78	11.4	15.5	19.4	23.4	27.3	22.1	16.3	12.5	9.22	8.24	6.79						
50	1.87	2.43	3.82	5.21	6.44	7.42	6.13	3.95	2.40	1.64	1.34	1.43						
55	0.97	1.26	1.59	1.60	1.65	1.62	1.28	1.20	0.94	0.84	0.67	0.77						
60	0.42	0.54	0.75	0.72	0.80	0.76	0.62	0.54	0.37	0.35	0.22	0.33						
65	0.22	0.20	0.33	0.25	0.31	0.28	0.22	0.25	0.11	0.16	0.10	0.20						
70	0.12	0.10	0.21	0.12	0.16	0.12	0.11	0.15	0.09	0.10	0.09	0.13						
75	0.10	0.07	0.10	0.07	0.10	0.09	0.10	0.10	0.10	0.10	0.09	0.12						
80	0.10	0.09	0.10	0.07	0.09	0.09	0.10	0.10	0.10	0.10	0.09	0.12						
85	0.10	0.09	0.10	0.07	0.09	0.09	0.10	0.10	0.10	0.10	0.09	0.11						
90	0.10	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.09	0.09	0.10						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks: